

OS-299 (10-22)  pennsylvania DEPARTMENT OF TRANSPORTATION www.penndot.pa.gov	TRANSMITTAL LETTER	PUBLICATION: Publication 148						
		DATE: 4/6/2026						
SUBJECT: Revisions to Traffic Standards – Signals TC-8800 Series December 2011 Edition, Change No. 3								
INFORMATION AND SPECIAL INSTRUCTIONS: Incorporate the attached revisions to the December 2011 Edition of Publication 148. These revised Standard Drawings should be adopted on all new and existing designs as soon as possible without affecting any letting schedules and in conjunction with current Publication 408 Specifications. The standards were updated to include a wood post mounting option for Flashing Warning Devices/Border Lit Signs. Additions, deletions, and revisions specific to each Standard and Sheet are as follows: <table border="1" data-bbox="152 961 1425 1140"> <thead> <tr> <th>STANDARD</th> <th>SHEET</th> <th>DESCRIPTION OF CHANGES</th> </tr> </thead> <tbody> <tr> <td>TC-8808</td> <td>1</td> <td>"FLASHING WARNING DEVICE WOOD POST MOUNTING" Sheet added to standards.</td> </tr> </tbody> </table>			STANDARD	SHEET	DESCRIPTION OF CHANGES	TC-8808	1	"FLASHING WARNING DEVICE WOOD POST MOUNTING" Sheet added to standards.
STANDARD	SHEET	DESCRIPTION OF CHANGES						
TC-8808	1	"FLASHING WARNING DEVICE WOOD POST MOUNTING" Sheet added to standards.						
CANCEL AND DESTROY THE FOLLOWING: Publication 148, Change #2 – Title Sheet Index Sheet	ADDITIONAL COPIES ARE AVAILABLE FROM: ☒ PennDOT website - www.penndot.pa.gov <i>Click on Forms, Publications & Maps</i>							
	APPROVED FOR ISSUANCE BY: Michael B. Carroll, Secretary Department of Transportation by:  Kelly M. Barber, P.E. – Chief Engineer of Highway Administration Department of Transportation							

OS-299 (10-22)  pennsylvania DEPARTMENT OF TRANSPORTATION www.penndot.pa.gov	TRANSMITTAL LETTER	PUBLICATION: Publication 148						
DATE: 1/27/2025								
SUBJECT: Revisions to Traffic Standards – Signals TC-8800 Series December 2011 Edition, Change No. 2								
INFORMATION AND SPECIAL INSTRUCTIONS: Incorporate the attached revisions to the December 2011 Edition of Publication 148. These revised Standard Drawings should be adopted on all new and existing designs as soon as possible without affecting any letting schedules and in conjunction with current Publication 408 Specifications. Regardless, revised standards under this release must be used on all projects let after April 11, 2025. Throughout the entire document these standards were updated to address comments that were made during the CT process for the June 2023 (Change #1) revision to the TC 8800 Series Standard Drawings. Edits to identified "H" dimension conflicts are incorporated into this update. Detection layouts and preemption details are being standardized to eliminate the information being included on traffic signal permit plans. Additions, deletions, and revisions specific to each Standard and Sheet are as follows:								
<table border="1"> <thead> <tr> <th>STANDARD</th> <th>SHEET</th> <th>DESCRIPTION OF CHANGES</th> </tr> </thead> <tbody> <tr> <td>TC-8801</td> <td>1</td> <td> Updated Mast Arm Details as follows: Updated Plan View of mast arm as follows: - Revised from “Angle “W” IF centerline OF ARM IS NOT PERPENDICULAR TO CONSTRUCTION centerline” to “Angle “WW” IF centerline OF ARM IS NOT PERPENDICULAR TO CONSTRUCTION Centerline” - Revised from “Angle “Y”. . to “Angle “YY”” Updated Elevation View of mast arm as follows: - Revised depiction of the Signal head (TYP.) from a 3-section vehicular signal to a 4-section signal head. - Added “SEE MUTCD, SECTION 4D.09 (HEIGHT TO TOP OF SIGNAL HOUSING.”. Detail Reference. - Revised from ““H” (CLEARANCE BETWEEN ROADWAY AND LOWEST SIGN OR SIGNAL HEAD) (SEE NOTE 10)” to “17’ MINIMUM (CLEARANCE BETWEEN ROADWAY AND LOWEST SIGN OR SIGNAL HEAD).”.-Removed “(SEE NOTE 10)” callout. </td> </tr> </tbody> </table>			STANDARD	SHEET	DESCRIPTION OF CHANGES	TC-8801	1	Updated Mast Arm Details as follows: Updated Plan View of mast arm as follows: - Revised from “Angle “W” IF centerline OF ARM IS NOT PERPENDICULAR TO CONSTRUCTION centerline” to “Angle “WW” IF centerline OF ARM IS NOT PERPENDICULAR TO CONSTRUCTION Centerline” - Revised from “Angle “Y”. . to “Angle “YY”” Updated Elevation View of mast arm as follows: - Revised depiction of the Signal head (TYP.) from a 3-section vehicular signal to a 4-section signal head. - Added “SEE MUTCD, SECTION 4D.09 (HEIGHT TO TOP OF SIGNAL HOUSING.”. Detail Reference. - Revised from ““H” (CLEARANCE BETWEEN ROADWAY AND LOWEST SIGN OR SIGNAL HEAD) (SEE NOTE 10)” to “17’ MINIMUM (CLEARANCE BETWEEN ROADWAY AND LOWEST SIGN OR SIGNAL HEAD).”.-Removed “(SEE NOTE 10)” callout.
STANDARD	SHEET	DESCRIPTION OF CHANGES						
TC-8801	1	Updated Mast Arm Details as follows: Updated Plan View of mast arm as follows: - Revised from “Angle “W” IF centerline OF ARM IS NOT PERPENDICULAR TO CONSTRUCTION centerline” to “Angle “WW” IF centerline OF ARM IS NOT PERPENDICULAR TO CONSTRUCTION Centerline” - Revised from “Angle “Y”. . to “Angle “YY”” Updated Elevation View of mast arm as follows: - Revised depiction of the Signal head (TYP.) from a 3-section vehicular signal to a 4-section signal head. - Added “SEE MUTCD, SECTION 4D.09 (HEIGHT TO TOP OF SIGNAL HOUSING.”. Detail Reference. - Revised from ““H” (CLEARANCE BETWEEN ROADWAY AND LOWEST SIGN OR SIGNAL HEAD) (SEE NOTE 10)” to “17’ MINIMUM (CLEARANCE BETWEEN ROADWAY AND LOWEST SIGN OR SIGNAL HEAD).”.-Removed “(SEE NOTE 10)” callout.						

TC-8801	2	- Revised from "AS REQUIRED TO PROVIDE DIMENSION "H" (SEE NOTE 9)" to "H" (MAST ARM MOUNTING HEIGHT.". - Removed "(SEE NOTE 9)" callout. Updated Strain Pole Details as follows: Updated Elevation View of strain pole as follows: - Revised from "Angle "Y"" to "Angle "YY"" - Revised from "Angle "Z"" to "Angle "ZZ"" - Revised from "15' MNIMUM (SEE NOTE 9)" to "17' MINIMUM CLEARANCE BETWEEN ROADWAY AND LOWEST POINT ON TETHER WIRE.". -Removed "(SEE NOTE 9)" callout.	
TC-8801	3	Updated Anchor Bolt Detail as follows: Depicted a washer underneath of the leveling nut	
TC-8801	4	Updated Traffic Signal Support Foundation Type A - Notes as follows: Added Note 8 – "EMBANKMENT SLOPE AS ILLUSTRATED IN PUBLICATION 72M (RC-83M) SHEET 3 OF 3. 2:1 MAXIMUM SLOPE. STEEPER SLOPES REQUIRE SPECIAL DESIGN."	
TC-8801	5	Updated Traffic Signal Support Mast Arm & Pedestal – Mast Arm Foundation notes as follows: Added Note 4 – "EMBANKMENT SLOPE AS ILLUSTRATED IN PUBLICATION 72M (RC-83M) SHEET 3 OF 3. 2:1 MAXIMUM SLOPE. STEEPER SLOPES REQUIRE SPECIAL DESIGN."	
TC-8801	6	Updated Traffic Signal Support Strain Pole Foundation Type A– Strain Pole Foundation notes as follows: Added Note 3 – "EMBANKMENT SLOPE AS ILLUSTRATED IN PUBLICATION 72M (RC-83M) SHEET 3 OF 3. 2:1 MAXIMUM SLOPE. STEEPER SLOPES REQUIRE SPECIAL DESIGN."	
TC-8803	2	Updated Pedestrian Pushbutton Mounting Details Type A and Type B as follows: - Revised "GALVANIZED RIGID STEEL CONDUIT" callout to "GALVANIZED RIGID STEEL CONDUIT 3" MIN/4.5" MAX." -For type A and B Foundations Blocks detail and Connection Detail- Added- "SEE NOTE 9." Updated Notes as follows:	

TC-8803	3	- Added Note 9 – “USE AN APPROPRIATELY SIZED FLANGE TO CORRESPOND WITH THE POLE SIZE THAT IS SELECTED. CONNECTION DETAIL CORRESPONDS TO 3” POLE.”. - Added Note 10- “FOR TYPE A AND B FOUNDATIONS, CONDUIT INSTALLATION IN CONCRETE BLOCKS SHALL BE CENTERED AND AS SPECIFIED IN DIMENSIONS.”. Updated Pedestrian Pushbutton Mounting Details Type D and Type E as follows: -Revised “EXPOSED GALVANIZED CONDUIT” callout to “EXPOSED GALVANIZED CONDUIT 3” MIN/4.5” MAX.”. - For type D and E Foundations View A-A - Added- “SEE NOTE 9.”. Updated Notes as follows: - Added Note 9 – “USE AN APPROPRIATELY SIZED FLANGE TO CORRESPOND WITH THE POLE SIZE THAT IS SELECTED. VIEW A-A DETAIL CORRESPONDS TO 3” POLE.”.	
TC-8804	1	Updated Service Type A and B Details as follows: Revised “2” CONDUIT (MIN.)” callout to “CONDUIT (SIZE PER UTILITY.”. Updated Notes as follows: Revised Note 5 from “PROVIDE ALL SERVICE CONDUITS OF THE HDG RIGID METALLIC TYPE WITH WATERTIGHT CONDUIT HUBS” to “PROVIDE ALL SERVICE CONDUITS OF THE MATERIAL APPROVED BY THE UTILITY AND ENSURE WATERTIGHT”.	
TC-8805	1	Updated Visor Types for Vehicular Signal Head Details as follows: -Corrected spelling of word “INDICATED” in bottom note Updated Backplate for Vehicular Signal Head Detail as follows: - Revised both “5” - 8” callouts be followed by two asterisks. - Added note below detail label which reads “**5” BORDER TO BE USED FOR 12” SIGNAL LENSES. 8” BORDER TO BE USED FOR 8” SIGNAL LENSES.”.	

TC-8806	1	Updated Sheet number to: -SHT. 1 OF 4
TC-8806	2	Updated Sheet number to: -SHT. 2 OF 4
TC-8806	3	"DETECTORS LOOP DETECTOR LAYOUT" Sheet added to standards
TC-8806	4	"DETECTORS DETECTION ZONE PLACEMENT" Sheet added to standards
TC-8807	1	"PREEMPTION" Sheet added to standards

CANCEL AND DESTROY THE FOLLOWING: Publication 148 – TC-8801 SHEET 1 – June 20, 2023 TC-8801 SHEET 2 – June 20, 2023 TC-8801 SHEET 3 – June 20, 2023 TC-8801 SHEET 4 – June 20, 2023 TC-8801 SHEET 5 – June 20, 2023 TC-8801 SHEET 6 – June 20, 2023 TC-8803 SHEET 2 – June 20, 2023 TC-8803 SHEET 3 – June 20, 2023 TC-8804 SHEET 1 – June 20, 2023 TC-8805 SHEET 1 – June 20, 2023 TC-8806 SHEET 1 – June 20, 2023 TC-8806 SHEET 2 – June 20, 2023 NOTE: Publication 148 is only available electronically via the PennDOT website	ADDITIONAL COPIES ARE AVAILABLE FROM: ☒ PennDOT website - www.penndot.pa.gov <i>Click on Forms, Publications & Maps</i> APPROVED FOR ISSUANCE BY:  For: Daniel P. Farley, P.E. Director, Bureau of Operations
---	---

OS-299 (10-22)  pennsylvania DEPARTMENT OF TRANSPORTATION www.penndot.pa.gov	TRANSMITTAL LETTER	PUBLICATION: 148									
DATE: 6/20/2023											
SUBJECT: Revisions to Traffic Standards – Signals TC-8800 Series December 2011 Edition, Change No. 1											
INFORMATION AND SPECIAL INSTRUCTIONS: Incorporate the attached revisions to the December 2011 Edition of Publication 148. These revised Standard Drawings should be adopted on all new and existing designs as soon as possible without affecting any letting schedules and in conjunction with current Publication 408 Specifications. Regardless, revised standards under this release must be used on all projects let after October 6, 2023. Throughout the entire document these standards were updated to include revised Publication 408 Specification references contained in the traffic signal specification updates per Change No. 3 of the Publication 408/2020 update. Additions, deletions, and revisions specific to each Standard and Sheet are as follows: <table border="1" data-bbox="152 1033 1424 2009"> <thead> <tr> <th>STANDARD</th> <th>SHEET</th> <th>DESCRIPTION OF CHANGES</th> </tr> </thead> <tbody> <tr> <td data-bbox="152 1075 349 1906">TC-8801</td> <td data-bbox="349 1075 487 1906">1</td> <td data-bbox="487 1075 1424 1906"> Updated Mast Arm Details as follows: -Revised Handhole callout leader location on Plan View of mast arm to match location of handhole depicted in Elevation View -Revised bolt pattern on Elevation View of mast arm pole base plate. Bolts depicted now represent six bolt pattern implemented in 2011 TC-8801 updates. Updated Notes as follows: - Revised Note 7 from “ARMS LESS THAN 31’ WILL BE ONE SECTION” to “ARMS 30’ OR LESS WILL BE ONE SECTION” - Revised second sentence of Note 16 from “PROVIDE GALLOPING MITIGATION DEVICE IN ACCORDANCE WITH PUB 408, SECTION 1104.02(b) IF THE MAXIMUM DISPLACEMENT (MAX. POSITIVE TO MAX. NEGATIVE) AT THE MAST ARM TIP EXCEEDS 8”.” to “PROVIDE GALLOPING MITIGATION DEVICE IN ACCORDANCE WITH MITIGATION DEVICE DETAIL ON SHEET 10 IF THE MAXIMUM DISPLACEMENT (MAX. POSITIVE TO MAX. NEGATIVE) AT THE MAST ARM TIP EXCEEDS 8”.” </td> </tr> <tr> <td data-bbox="152 1906 349 2009">TC-8801</td> <td data-bbox="349 1906 487 2009">2</td> <td data-bbox="487 1906 1424 2009">Updated Strain Pole Details as follows:</td> </tr> </tbody> </table>			STANDARD	SHEET	DESCRIPTION OF CHANGES	TC-8801	1	Updated Mast Arm Details as follows: -Revised Handhole callout leader location on Plan View of mast arm to match location of handhole depicted in Elevation View -Revised bolt pattern on Elevation View of mast arm pole base plate. Bolts depicted now represent six bolt pattern implemented in 2011 TC-8801 updates. Updated Notes as follows: - Revised Note 7 from “ARMS LESS THAN 31’ WILL BE ONE SECTION” to “ARMS 30’ OR LESS WILL BE ONE SECTION” - Revised second sentence of Note 16 from “PROVIDE GALLOPING MITIGATION DEVICE IN ACCORDANCE WITH PUB 408, SECTION 1104.02(b) IF THE MAXIMUM DISPLACEMENT (MAX. POSITIVE TO MAX. NEGATIVE) AT THE MAST ARM TIP EXCEEDS 8”.” to “PROVIDE GALLOPING MITIGATION DEVICE IN ACCORDANCE WITH MITIGATION DEVICE DETAIL ON SHEET 10 IF THE MAXIMUM DISPLACEMENT (MAX. POSITIVE TO MAX. NEGATIVE) AT THE MAST ARM TIP EXCEEDS 8”.”	TC-8801	2	Updated Strain Pole Details as follows:
STANDARD	SHEET	DESCRIPTION OF CHANGES									
TC-8801	1	Updated Mast Arm Details as follows: -Revised Handhole callout leader location on Plan View of mast arm to match location of handhole depicted in Elevation View -Revised bolt pattern on Elevation View of mast arm pole base plate. Bolts depicted now represent six bolt pattern implemented in 2011 TC-8801 updates. Updated Notes as follows: - Revised Note 7 from “ARMS LESS THAN 31’ WILL BE ONE SECTION” to “ARMS 30’ OR LESS WILL BE ONE SECTION” - Revised second sentence of Note 16 from “PROVIDE GALLOPING MITIGATION DEVICE IN ACCORDANCE WITH PUB 408, SECTION 1104.02(b) IF THE MAXIMUM DISPLACEMENT (MAX. POSITIVE TO MAX. NEGATIVE) AT THE MAST ARM TIP EXCEEDS 8”.” to “PROVIDE GALLOPING MITIGATION DEVICE IN ACCORDANCE WITH MITIGATION DEVICE DETAIL ON SHEET 10 IF THE MAXIMUM DISPLACEMENT (MAX. POSITIVE TO MAX. NEGATIVE) AT THE MAST ARM TIP EXCEEDS 8”.”									
TC-8801	2	Updated Strain Pole Details as follows:									

TC-8801	3	-Revised bolt pattern on Elevation View of strain pole base plates. Bolts depicted now represent six bolt pattern implemented in 2011 TC-8801 updates. Updated Foundation Notes as follows: - Revised Note 7 from "GALVANIZE ALL STRUCTURAL STEEL IN ACCORDANCE WITH PUB. 408, SECTION 1104.02(a) 8." to "GALVANIZE ALL STRUCTURAL STEEL IN ACCORDANCE WITH PUB. 408, SECTION 951.2(c)1.d" - Revised Note 10 from "USE STEEL TEMPLATE TO SET ANCHOR BOLTS IN ACCORDANCE WITH PUBLICATION 408, SECTION 1104.02 (e)." to "USE STEEL TEMPLATE TO SET ANCHOR BOLTS IN ACCORDANCE WITH PUBLICATION 408, SECTION 951.2(c)5."	
TC-8801	4	Updated Type A Foundation Case 1 Section F-F Detail as follows: -Removed "(SEE NOTE 5)" from "GALVANIZED WIRE MESH OR GROUT" callout . Updated Notes as follows: - Revised the first sentence of Note 3 from "IN A PAVED AREA, PLACE THE TOP OF FOUNDATION FLUSH WITH THE SURFACE OF THE ADJACENT PAVEMENT" to "IN A SIDEWALK AND PAVED AREA, PLACE THE TOP OF FOUNDATION FLUSH WITH THE SURFACE OF THE ADJACENT PAVEMENT" - Removed Note 5 - Renumbered Notes 6, 7, and 8 to Notes 5, 6, and 7 respectively	
TC-8801	8	Updated Type B Foundation Section G-G Detail as follows: -Removed "(SEE NOTE 7)" from "GALVANIZED WIRE MESH OR GROUT" callout . Updated Notes as follows: - Revised the first sentence of Note 3 from "IN A PAVED AREA, PLACE THE TOP OF FOUNDATION FLUSH WITH THE SURFACE OF THE ADJACENT PAVEMENT" to "IN A SIDEWALK AND PAVED AREA, PLACE THE TOP OF FOUNDATION FLUSH WITH THE SURFACE OF THE ADJACENT PAVEMENT" - Removed Note 7 - Renumbered Note 8 to Note 7	
TC-8801	9	Updated Sign Bracket – Mast Arm Detail as follows: -Revised "STAINLESS STEEL BAND CONFORMING TO PUBLICATION 408, SECTION 1103.11(n)." callout to "STAINLESS	

		STEEL BAND CONFORMING TO PUBLICATION 408, SECTION 1103.11(k).”. Updated Notes as follows: - Revised Note 4 from “ALUMINUM SIGN BOLTS, NUTS, WASHERS AND NYLON WASHERS SHALL CONFORM TO PUBLICATION 408, SECTION 1103.11 (m), SECTION 1103.11 (n), SECTION 1103.11 (o) 1 AND SECTION 1103.11 (o) 2 RESPECTIVELY.” to “ALUMINUM SIGN BOLTS, NUTS, WASHERS AND NYLON WASHERS SHALL CONFORM TO PUBLICATION 408, SECTION 1103.11.” - Revised Note 5 from “GALVANIZED STEEL U-BOLTS, NUTS AND LOCK WASHERS SHALL BE CONFORM TO PUBLICATION 408, SECTION 1105.02 (c) 1, AND SHALL BE OF ¼” X 3” X 1 7/8”. ” to “GALVANIZED STEEL U-BOLTS, NUTS AND LOCK WASHERS SHALL CONFORM TO PUBLICATION 408, SECTION 1105.02 (c) 1, AND SHALL BE OF ¼” X 3” X 1 7/8”. ”.	
TC-8802	1	Updated Controller Assembly on Traffic Signal Support Type II Mounting Detail as follows: -Depicted bolt pattern on Elevation View of signal pole base plates. Bolts depicted represent six bolt pattern implemented in 2011 TC-8801	
TC-8803	1	Updated Traffic Signal Support – Pedestal Plate Base Detail as follows: -Depicted bolt pattern on Elevation View pedestal base plate. Updated Pedestrian Pushbutton Vertical Placement Detail as follows: -Depicted bolt pattern on Elevation View of signal pole base plate. Bolts depicted represent six bolt pattern implemented in 2011 TC-8801 Updated Notes as follows: Revised the last sentence of Note 5 from “SEE DETAIL C ON SHEET 9 OF TC-8801.” to “SEE DETAIL C ON SHEET 10 OF TC-8801.”	
TC-8803	2	Updated Pedestrian Pushbutton Mounting Details Type B as follows: -Revised “PEDESTRIAN SIGN” callout to “PUSHBUTTON SIGN.”. Callout was revised to be consistent with similar callouts on Type A, Type C, and Type F Details. Updated Notes as follows: Revised the last sentence of Note 4 from “SEE DETAIL C ON SHEET 9 OF TC-8801.” to “SEE DETAIL C ON SHEET 10 OF TC-8801.”	

TC-8803	3	- Revised last sentence of Note 7 from “EXTENSION ARMS MEASURING BETWEEN 3” TO 12” REQUIRE DISTRICT APPROVAL PRIOR TO INSTALLATION.” to “EXTENSION ARMS MEASURING GREATER THAN 12” REQUIRE DISTRICT APPROVAL PRIOR TO INSTALLATION.” - Added Note 8 - “INSTALL CONCRETE FOUNDATIONS IN ACCORDANCE WITH PUBLICATION 408 SECTION 951.2 (b) AND 951.3 (b).”. Updated Pedestrian Pushbutton Mounting Details Type D and Type E as follows: -Revised “PEDESTRIAN SIGN” callout to “PUSHBUTTON SIGN.”. Callout was revised to be consistent with similar callouts on Type A, Type C, and Type F Details. Updated Notes as follows: - Revised the last sentence of Note 4 from “SEE DETAIL C ON SHEET 9 OF TC-8801.” to “SEE DETAIL C ON SHEET 10 OF TC-8801.” - Revised last sentence of Note 7 from “EXTENSION ARMS BETWEEN 3” TO 12” REQUIRE DISTRICT APPROVAL PRIOR TO INSTALLATION.” to “EXTENSION ARMS GREATER THAN 12” REQUIRE DISTRICT APPROVAL PRIOR TO INSTALLATION.” - Added Note 8 - “INSTALL CONCRETE FOUNDATIONS IN ACCORDANCE WITH PUBLICATION 408 SECTION 951.2 (b) AND 951.3 (b).”.	
TC-8804	2	Updated Junction Box, Type JB-26 and Junction Box, Type JB-27 Details as follows: -Revised Junction Box Details to a typical detail for cast iron or steel and a typical detail for reinforced plastic mortar or high-density polymer concrete with dimensions for each detail labeled as variables. Identified corresponding required JB-26 and JB-27 dimensions in tabular format. Added JB-30 dimensions to table as applicable. Updated Typical Junction Box Installation Junction Box in Paved Surface Detail as follows: -Revised label of detail from ‘JUNCTION BOX IN PAVED SURFACE’ to “JUNCTION BOX IN PAVED SURFACE AND SIDEWALK” Updated Trench and Backfill Detail as follows: -Revised fifth symbol note from “BACKFILL AS SPECIFIED IN SECTION 954, PUBLICATION 408” to “BACKFILL AS SPECIFIED IN SECTION 910.3 (c), PUBLICATION 408” Updated Notes as follows: Revised the first sentence of Note 2 from “JUNCTION BOXES – USE JB-26 AND JB-27 ONLY IN AREAS NOT SUBJECT	

		TO VEHICULAR TRAFFIC.” to “JUNCTION BOXES – USE JB-26, JB-27 AND JB-30 ONLY IN AREAS NOT SUBJECT TO VEHICULAR TRAFFIC ”	
TC-8805	1	Updated Visor Types for Vehicular Signal Head Details as follows: -Removed Full-Circle Visor Detail -Added Dimension B to show visor lengths in lieu of describing in a note -Added a visor dimension table^o for visor dimensions A and B -Revised detail note from “THE VISOR SHALL BE A MINIMUM OF 9.5” FOR A 12” SIGNAL LENS AND 7” FOR AN 8” SIGNAL LENS WITH A DOWNWARD TILT OF 3.5 DEGREES” to “THE VISOR SHALL HAVE A DOWNWARD TILT OF AT LEAST 3^o ” Updated Backplate for Vehicular Signal Head Detail as follows: - Revised “5” MIN” callouts to “5” - 8”.”. - Revised Backplate detail to show reflective yellow border and added callout “2” MIN. FLOURESCENT YELLOW RETROREFLECTIVE BORDER” - Added note below detail label which reads “*BACKPLATE CONFORMING TO PUBLICATION 408 SECTION 955.2 (B) 3 SHALL BE ONE PIECE ALUMINUM” Updated Pedestrian Signal Head Detail as Follows: -Corrected spelling of word “SHOULD” in bottom note	
TC-8806	1	Updated Typical Sensor Installation – Loop Detector Section A-A Detail as follows: -Removed detail and replaced with a detail depicting installation of loop wire with backer rods. - Revised detail note from “NO MORE THAN FOUR CONDUCTORS SHALL BE PLACED IN A SLOT. FOUR CONDUCTORS SHOWN FOR ILLUSTRATION PURPOSES ONLY.” to “THREE CONDUCTORS SHOWN FOR ILLUSTRATION PURPOSES ONLY.”	
TC-8806	2	Updated Detector Splice Alternate A Detail as follows: -Revised callout from “SEALANT (SEC. 1104.07 (a) 1, PUBLICATION 408)” to “SEALANT (SEC. 956.2 (b) 1, PUBLICATION 408)” Updated Detector Splice Alternate C Detail as follows: -Revised last line of note from “SEC. 1104.07 (a) 4, PUBLICATION 408.” to “SEC. 956.2 (b) 4, PUBLICATION 408.	
All		Revised “Bureau of Maintenance and Operations” to “Bureau of Operations”	

CANCEL AND DESTROY THE FOLLOWING: Publication 148 – TC-8801 SHEET 1 – Dec. 12, 2011 TC-8801 SHEET 2 – Dec. 12, 2011 TC-8801 SHEET 3 – Dec. 12, 2011 TC-8801 SHEET 4 – Dec. 12, 2011 TC-8801 SHEET 8 – Dec. 12, 2011 TC-8801 SHEET 9 – Dec. 12, 2011 TC-8802 SHEET 1 – Dec. 12, 2011 TC-8803 SHEET 1 – Dec. 12, 2011 TC-8803 SHEET 2 – Dec. 12, 2011 TC-8803 SHEET 3 – Dec. 12, 2011 TC-8804 SHEET 2 – Dec. 12, 2011 TC-8805 SHEET 1 – Dec. 12, 2011 TC-8806 SHEET 1 – Dec. 12, 2011 TC-8806 SHEET 2 – Dec. 12, 2011 NOTE: Publication 148 is only available electronically via the PennDOT website	ADDITIONAL COPIES ARE AVAILABLE FROM: ☒ PennDOT website - www.penndot.pa.gov <i>Click on Forms, Publications & Maps</i> APPROVED FOR ISSUANCE BY: Daniel P. Farley, P.E. /s/ Director, Bureau of Operations

OS-299 (7-08)  pennsylvania DEPARTMENT OF TRANSPORTATION	TRANSMITTAL LETTER	PUBLICATION: 148
		DATE: 12/12/2011
SUBJECT: Traffic Standards - Signals (TC-8800 Series)		
INFORMATION AND SPECIAL INSTRUCTIONS: Project Development: The accompanying revisions become effective December 21, 2011 or earlier as directed by the District Executive, for all projects with traffic signal supports as follows: • All Department projects that have not submitted Plans, Specifications, and Estimate packages prior to effective date. • All Highway Occupancy Permits or Municipal projects that do not have an approved Traffic Signal Permit prior to the effective date. Shop Drawing Review: In addition to the revisions made to the standards, , Publication 35, Bulletin 15 (Approved Construction Materials) Section 1104.02, will also be updated accordingly to indicate those manufacturers who have been recertified to provide traffic signal supports meeting the new criteria. Drawings for the approved manufacturers are available for Department representatives for reviewing and approving shop drawings. The approved manufacturer drawings are available at: ftp://ftp.dot.state.pa.us/transfer/Traffic Signals/Traffic Signal Structural Supports/ .Maintenance: If a traffic signal structural support needs to be replaced due to knockdown, the Department will allow the traffic signal structural support to be reinstalled using the standard in place at the time of initial installation. If the foundation needs to be modified or replaced as part of a knockdown, then the 2011 updated standard should be followed.		
CANCEL AND DESTROY THE FOLLOWING: This will replace the 10/14/2010 Publication 148 (Traffic Standards - Signals (TC-8800 Series))	ADDITIONAL COPIES ARE AVAILABLE FROM: ☒ PennDOT SALES STORE (717) 787-6746 phone (717) 787-8779 fax ra-penndotsalesstore@state.pa.us ☒ PennDOT website - www.dot.state.pa.us <i>Click on Forms, Publications & Maps</i> ☒ DGS warehouse (PennDOT employees ONLY)	
	APPROVED FOR ISSUANCE BY: Daryl St. Clair, P.E. /s	

The following are changes from the October 14, 2010 update:

Traffic Control Standard #	Sheet #	Description of the Change
TC-8800 Series		All of the sheets have been updated to reflect the PennDOT reorganization which is expected in the upcoming weeks.
TC-8801	Sheet 1	An additional general note has been added to indicated that a mitigation device should be placed on sign mast arms over 50-feet.
TC-8801	Sheet 1	An additional general note has been added to indicate the limitations of a dual mast arm installation.
TC-8801	Sheet 3	The anchor bolt lengths have been modified to reflect appropriate design lengths instead of a 6-foot anchor bolt for all situations.
TC-8801	Sheet 3	The foundation design criteria has been modified addressing concerns that the previous traffic signal foundations were too conservative.
TC-8801	Sheet 3	Traffic signal pedestal supports are permitted to have a 4-anchor bolt configuration. The Traffic Signal Support Mast Arm and Strain Pole will still require 6-anchor bolts for new installations.
TC-8801	Sheet 3	Three additional rock cases have been added and are more clearly defined on sheet 4.
TC-8801	Sheet 3	An additional foundation note has been added providing instructions if weak soil conditions are encountered.
TC-8801	Sheet 4	An additional Note has been added referencing the additional pedestrian pushbutton details in TC-8803.
TC-8801	Sheet 4	An additional note indicating the Alternate Type A foundation details has been added.
TC-8801	Sheet 4	The foundation depths and associated notes are provided on Sheets 5 and 6.
TC-8801	Sheet 4	Three additional Rock cases have been added to provide alternative foundation depths when rock is encountered.
TC-8801	Sheet 4	The closed tie detail has been updated to eliminate the hooks.
TC-8801	Sheet 5	All of the Mast Arm and Pedestal Foundation Type A depths are indicated for all of the standard cases.
TC-8801	Sheet 6	All of the Strain Pole Foundation Type A depths are indicated for all of the standard cases.
TC-8801	Sheet 7	A new sheet has been added addressing an alternative reduced foundation diameter. The Bureau of Maintenance and Operations approval would be required to use this foundation alternative.
TC-8801	Sheet 9	The aluminum Z dimensions have been updated.
TC-8801	Sheet 9	The galvanized steel U-bolt nuts and lock washers dimensions contained within Note 5 have been updated.
TC-8801	Sheet 10	The handhole detail has been updated.
TC-8801	Sheet 10	A mitigation device detail has been added.
TC-8803	Sheet 1	An additional Note referencing the pedestrian pushbutton mounting details has been added.
TC-8803	Sheet 1	The pedestrian push button height requirements have been updated.
TC-8803	Sheet 2 and 3	Two additional sheets with 6 types of pedestrian pushbutton pole installation details have been added.
TC-8803	Sheet 2 and 3	An additional Note defining the pedestrian pushbutton extension requirements has been added.

12/12/2011

TRAFFIC STANDARDS—SIGNALS


TC-8800 SERIES




INDEX OF TRAFFIC STANDARDS – SIGNALS

<u>STANDARD DRAWING NO.</u>	<u>DATE</u>	<u>DESCRIPTION</u>
TC-8801 (10 SHEETS)	JAN 27 , 2025**	TRAFFIC SIGNAL SUPPORT
TC-8802	JUN 20 , 2023*	CONTROLLER ASSEMBLY
TC-8803 (4 SHEETS)	JAN 27 , 2025**	MISCELLANEOUS
TC-8804 (2 SHEETS)	JAN 27 , 2025**	ELECTRICAL DISTRIBUTION
TC-8805	JAN 27 , 2025**	SIGNAL HEADS
TC-8806 (4 SHEETS)	JAN 27 , 2025**	DETECTORS
TC-8807	JAN 27 , 2025**	PREEMPTION
TC-8808	APR 6 , 2026***	FLASHING WARNING DEVICE


* SEE CHANGE #1 FOR JUNE 20 , 2023 STANDARD REVISIONS
** SEE CHANGE #2 FOR JANUARY 27 , 2025 STANDARD REVISIONS
*** SEE CHANGE #3 FOR APRIL 6 , 2026 STANDARD REVISIONS

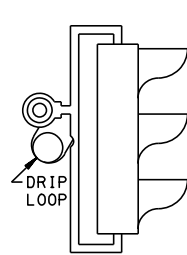


SECTION D-D

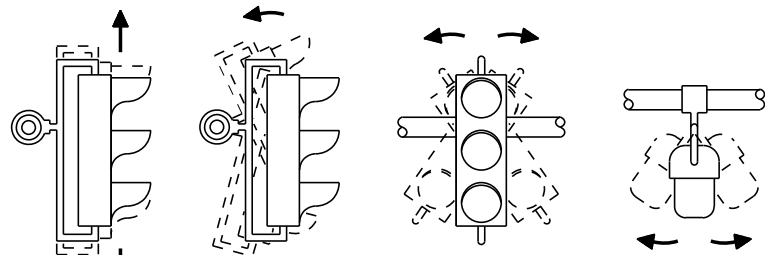

DETAIL A

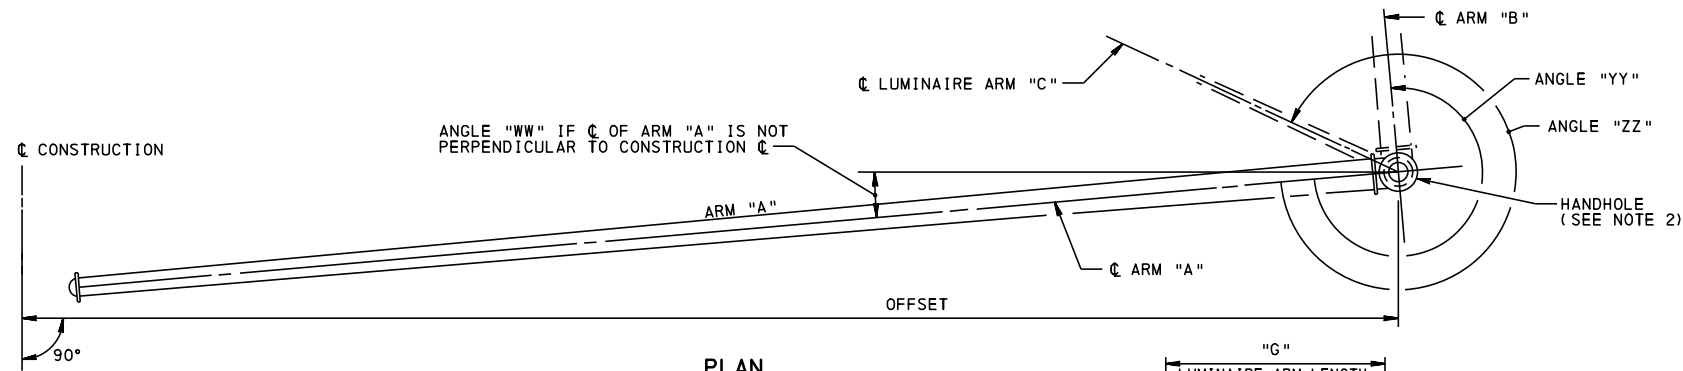

PLAN

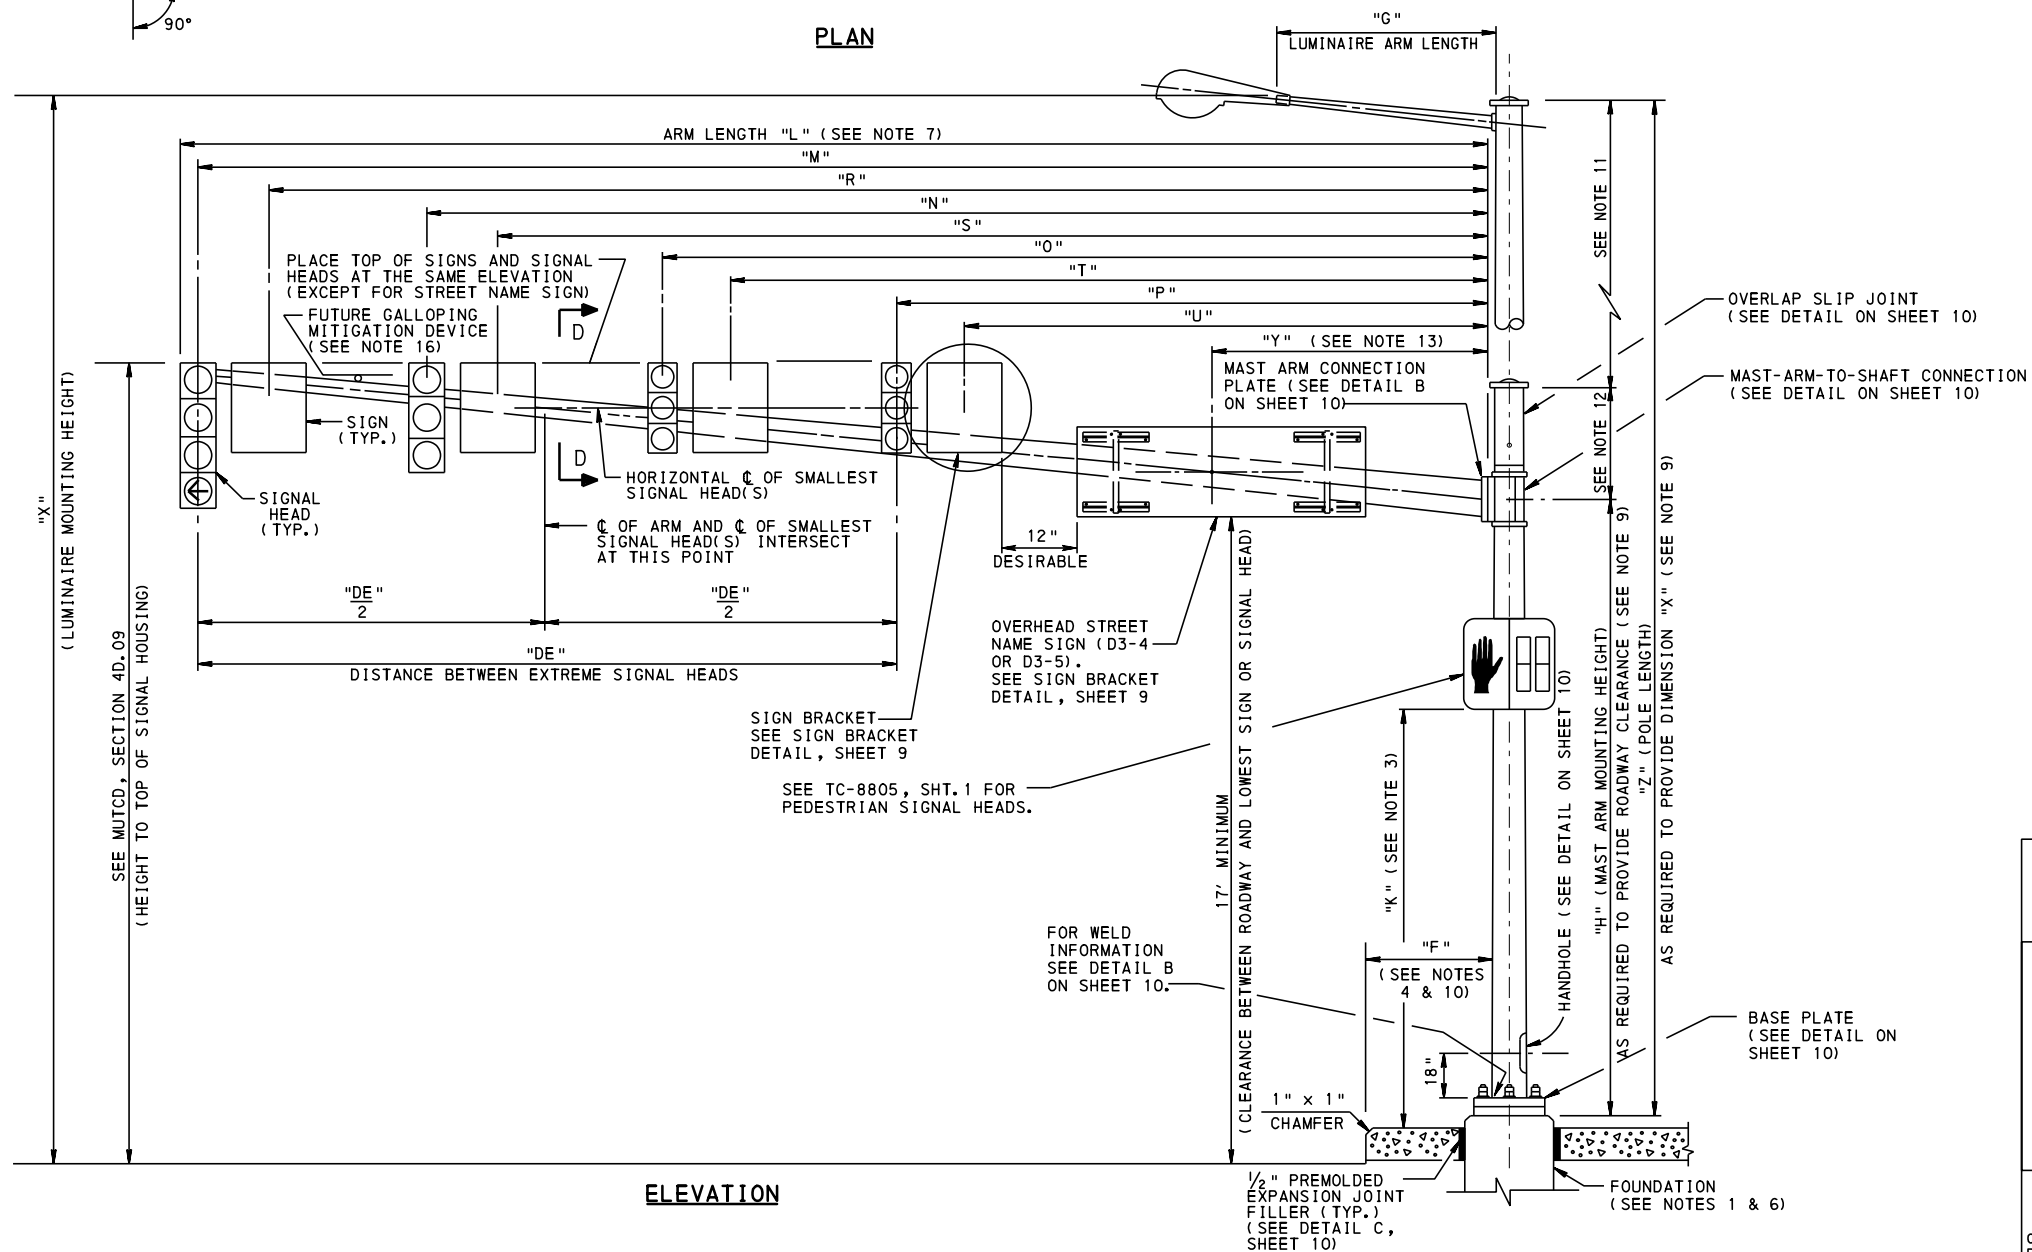

ELEVATION

GENERAL NOTES:

1. FOR FOUNDATION DETAILS, SEE SHEETS 3 THROUGH 8.
2. PLACE HANDHOLE 90° OR 180° FROM CENTERLINE OF ARM "A".
3. DIMENSION "K" IS FROM SIDEWALK. IF NO SIDEWALK, DIMENSION "K" IS FROM PAVEMENT GRADE AT CENTER OF ROADWAY. PROVIDE SPECIFIED DIMENSION "K" SUCH THAT CLEARANCE IS IN THE RANGE OF: 8' MINIMUM, 15' MAXIMUM FOR TRAFFIC SIGNAL HEADS; 7' MINIMUM, 10' MAXIMUM FOR PEDESTRIAN SIGNAL HEADS.
4. DIMENSION "F" IS 2' MINIMUM FROM CURB OR FROM EDGE OF SHOULDER. PLACE POST-MOUNTED SIGNALS 2' MINIMUM BEHIND CURB OR EDGE OF SHOULDER.
5. A "ROUND TAPERED" SUPPORT IS USED FOR ILLUSTRATION PURPOSES. THE TYPE OF SUPPORT MAY BE ANY OF THOSE INDICATED IN PUBLICATION 408.
6. INSTALL A MINIMUM OF ONE GROUND ROD AT EACH FOUNDATION. SEE TC-8804.
7. ARMS 30' OR LESS MUST BE ONE SECTION.
8. RIGIDLY MOUNT ALL SIGNAL HEADS ON THE MAST ARM UNLESS OTHERWISE INDICATED. PROVIDE MOUNTING BRACKETS THAT:
 - a. ATTACH TO THE TOP AND BOTTOM OF THE SIGNAL HEAD. FOR 5-SECTION HEADS, ATTACH EITHER TO THE TOP AND BOTTOM OF THE SIGNAL HEAD, OR TO THE BOTTOM AND BETWEEN THE RED AND YELLOW SECTIONS OF THE SIGNAL HEAD.
 - b. PERMIT THE ADJUSTMENTS SHOWN IN DETAIL A.
 - c. HAVE GROMMETED WIRE ENTRANCE.
 - d. DO NOT ENTRAP WATER INSIDE THE BRACKET.
9. OBTAIN ELEVATION OF ROADWAY AND TOP OF FOUNDATION PRIOR TO DETERMINING THIS DIMENSION.
10. PROVIDE SPECIFIED CLEARANCE IN ACCORDANCE WITH PUBLICATION 149 AND "THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES".
11. USE ONE-PIECE SHAFT WHEN LUMINAIRE IS REQUIRED EXCEPT FOR ROUND STEPPED SUPPORTS, OR UNLESS ALTERNATE OVERLAP SLIP JOINT IS SPECIFIED OR APPROVED ON A PROJECT-BY-PROJECT BASIS.
12. IF SPECIFIED, PROVIDE 36" MINIMUM STUB TO ALLOW FUTURE LUMINAIRE ATTACHMENT VIA OVERLAP SLIP JOINT.
13. FOR MAXIMUM ALLOWABLE DIMENSION "Y", SEE PUBLICATION 149, "CRITERIA FOR THE DESIGN OF TRAFFIC SIGNAL SUPPORTS".
14. FOR QUANTITY, SIZE, SIZE OF HOLES AND BOLT CIRCLE FOR ANCHOR BOLTS, SEE SHEET 3.
15. INSTALL MITIGATION DEVICE FOR MAST ARMS 50' OR LONGER WITH SIGNS ONLY. FOR MITIGATION DEVICE DETAIL, SEE SHEET 10. (INCIDENTAL TO MAST ARM ITEM)
16. DURING 30-DAY TEST PERIOD, VISUALLY INSPECT NEW MAST ARM INSTALLATION FOR GALLOPING IN 5 TO 20 MPH WIND CONDITION. CONTINUE VISUAL INSPECTION FOR ANOTHER 180-DAY PERIOD. PROVIDE GALLOPING MITIGATION DEVICE IN ACCORDANCE WITH MITIGATION DEVICE DETAIL ON SHEET 10 IF THE MAXIMUM DISPLACEMENT (MAX. POSITIVE TO MAX. NEGATIVE) AT THE MAST ARM TIP EXCEEDS 8". IF A MITIGATION DEVICE IS INSTALLED, CONTINUE VISUAL INSPECTION OF MAST ARM FOR THE ABOVE CRITERIA DURING 180-DAY PERIOD. PROVIDE VISUAL INSPECTION RECORDS TO THE OWNER AT THE END OF THE 180-DAY PERIOD. GALLOPING MAY RESULT IN LARGE AMPLITUDE, RESONANT OSCILLATIONS IN A PLANE NORMAL TO THE DIRECTION OF WIND FROM UNIQUE COMBINATIONS OF ATTACHMENT GEOMETRY, ATTACHMENT ORIENTATION, ATTACHMENT WEIGHTS, WIND DIRECTION AND STRUCTURE STIFFNESS.
17. THE ANCHOR BOLT DIAMETERS, ANCHOR BOLT CIRCLES AND FOUNDATIONS PRESENTED IN THESE STANDARDS ARE APPLICABLE FOR ONE MAST ARM CONFIGURATIONS AND TWO MAST ARMS CONFIGURATIONS WHEN THE MAST ARMS ARE PERPENDICULAR TO ONE ANOTHER. ADDITIONAL STRUCTURAL ANALYSIS IS REQUIRED FOR THE ANCHOR BOLT DIAMETERS, ANCHOR BOLT CIRCLES AND FOUNDATIONS FOR TWO MAST ARMS AT ACUTE OR OBTUSE ANGLES TO EACH OTHER.

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF OPERATIONS

STANDARD

TRAFFIC SIGNAL SUPPORT
MAST ARM



RECOMMENDED JAN 27, 2025
[Signature]
CHIEF, TSMO ARTERIALS AND
PLANNING SECTION

RECOMMENDED JAN 27, 2025
[Signature]
CHIEF OF HIGHWAY SAFETY AND
TRAFFIC OPERATIONS DIVISION


SHEET 1 OF 10
TC-8801

MINIMUM BREAKING STRENGTH OF SPAN WIRE


NOM. DIA. OF SPAN WIRE	ASTM A 475, CLASS A, SIEMENS-MARTIN GRADE	ASTM B 416
1/4"	3150 lbs	6301 lbs
5/16"	5350 lbs	10,020 lbs
3/8"	6950 lbs	15,930 lbs
7/16"	9350 lbs	19,060 lbs
1/2"	12,100 lbs	23,000 lbs

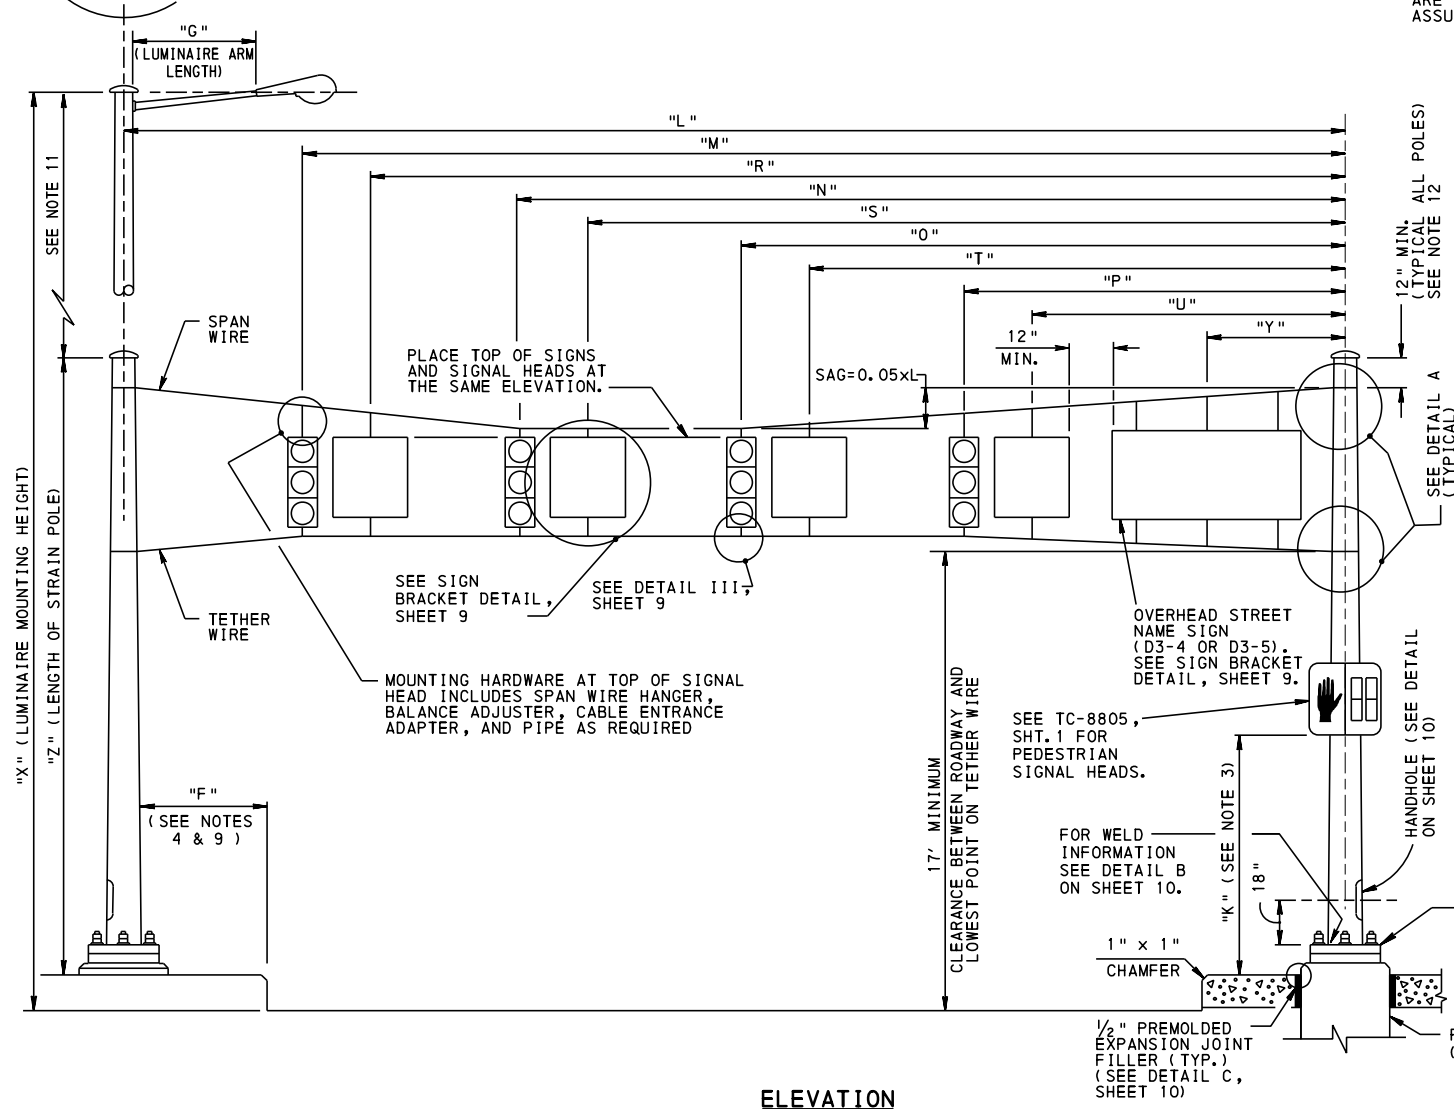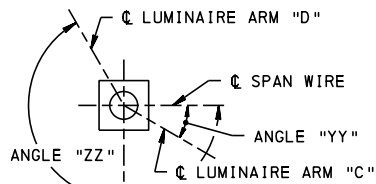

ELEVATION

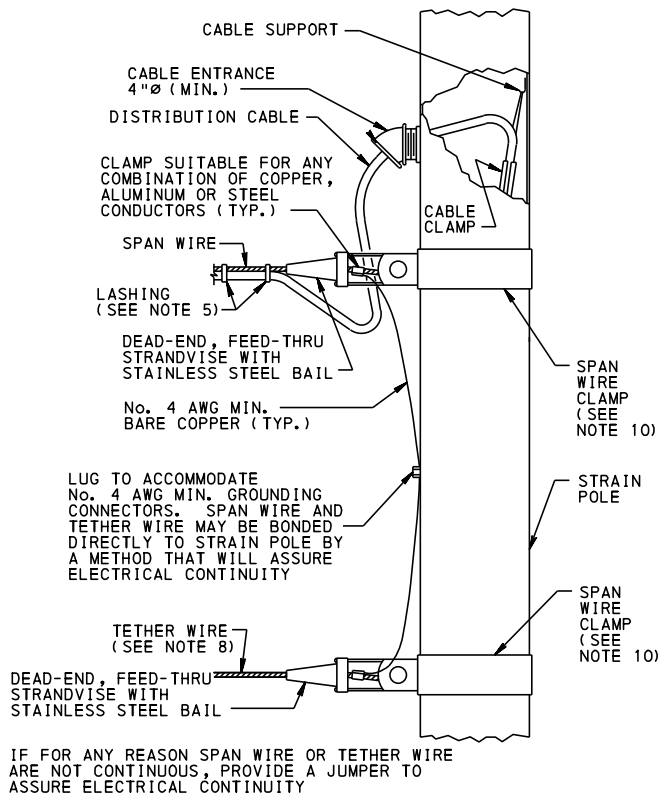

DETAIL A

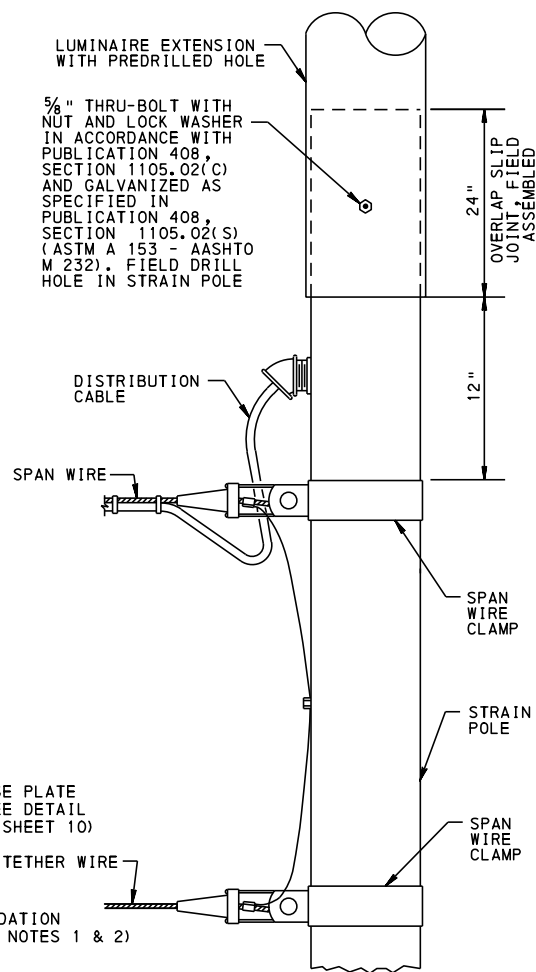

OVERLAP SLIP JOINT DETAIL
(ALTERNATE METHOD TO PROVIDE LUMINAIRE)
(SEE NOTES 11 AND 12)

GENERAL NOTES:


- FOR FOUNDATION DETAILS, SEE SHEETS 3 THROUGH 7.
- INSTALL A MINIMUM OF ONE GROUND ROD AT EACH FOUNDATION, SEE TC-8804, SHT. 1.
- DIMENSION "K" IS FROM SIDEWALK. IF NO SIDEWALK, DIMENSION "K" IS FROM PAVEMENT GRADE AT CENTER OF ROADWAY. PROVIDE SPECIFIED DIMENSION "K" SUCH THAT CLEARANCE IS IN THE RANGE OF: 8' MINIMUM, 15' MAXIMUM FOR TRAFFIC SIGNAL HEADS; 7' MINIMUM, 10' MAXIMUM FOR PEDESTRIAN SIGNAL HEADS.
- DIMENSION "F" IS 2' MINIMUM FROM CURB OR FROM EDGE OF SHOULDER. PLACE POST-MOUNTED SIGNALS 2' MINIMUM BEHIND CURB OR EDGE OF SHOULDER.
- LASH DISTRIBUTION CABLE TO THE SPAN WIRE WITH PREFORMED GALVANIZED STEEL RODS, SELF-LOCKING CABLE TIES OF THE OUTDOOR TYPE, SOLID COPPER WIRE, GALVANIZED STEEL WIRE, STAINLESS STEEL WIRE, OR CABLE RINGS AND SADDLES. MAKE ONE COMPLETE WRAP WITH WIRE LASHING AT INTERVALS NOT EXCEEDING 6". SECURE ENDS OF WIRE LASHING TO THE SPAN WIRE WITH AN ALL PURPOSE SPLIT BOLT CONNECTOR. PLACE CABLE TIES AT INTERVALS NOT EXCEEDING 12". PROVIDE PROPER SIZE AND SPACING OF CABLE RINGS AND SADDLES ACCORDING TO MANUFACTURER'S RECOMMENDATIONS.
- PROVIDE DEAD-ENDS THAT DEVELOP THE STRENGTH OF THE SPAN WIRE.
- FOR QUANTITY, SIZE, SIZE OF HOLES AND BOLT CIRCLE FOR ANCHOR BOLTS, SEE SHEET 3.
- TETHER WIRE - 1/4" DIAMETER (NOMINAL) WITH A BREAKING STRENGTH OF 1900 lbs MEETING ASTM A 475, CLASS A, COMMON GRADE.
- PROVIDE SPECIFIED CLEARANCE IN ACCORDANCE WITH PUBLICATION 149 AND THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES".
- EACH SPAN OR TETHER WIRE WILL HAVE AN INDIVIDUAL SPAN WIRE CLAMP.
- USE ONE-PIECE STRAIN POLE WHEN LUMINAIRE IS REQUIRED EXCEPT FOR ROUND STEPPED SUPPORTS, OR UNLESS ALTERNATE OVERLAP SLIP JOINT IS SPECIFIED OR APPROVED ON A PROJECT-BY-PROJECT BASIS.
- IF SPECIFIED, PROVIDE 36" MINIMUM STUB TO ALLOW FUTURE LUMINAIRE ATTACHMENT VIA OVERLAP SLIP JOINT.

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF OPERATIONS

STANDARD
TRAFFIC SIGNAL SUPPORT
STRAIN POLE


NOTES:

1. PROVIDE THE TYPE "A" FOUNDATION AT ALL LOCATIONS, EXCEPT THE TYPE "B" FOUNDATION (SHOWN ON SHEET 8) MAY BE USED WHEN PHYSICAL CONDITIONS PREVENT PLACING THE TYPE "A" FOUNDATION TO ITS REQUIRED DEPTH.
2. FOR DESIGN CRITERIA SEE SHEET 3.
3. IN A SIDEWALK AND PAVED AREA, PLACE THE TOP OF FOUNDATION FLUSH WITH THE SURFACE OF THE ADJACENT PAVEMENT. GRADE ADJACENT PAVEMENT AWAY FROM ANCHOR BOLTS FOR DRAINAGE. IN UNPAVED AREAS TOP OF FOUNDATION TO BE 6" ABOVE TOP OF GROUND.
4. FOR GROUND ROD SIZE AND INSTALLATION DETAILS, SEE TC-8804.
5. FOR MAST ARM AND TRAFFIC SIGNAL PEDESTAL POLE TABLES, REFER TO SHEET 5. FOR STRAIN POLE TABLES, SEE SHEET 6.
6. FOR TRAFFIC SIGNAL PEDESTRIAN PUSH BUTTON POLE DETAIL, REFER TO TC-8803.
7. FOR MAST ARM LOCATIONS WITH SITE LIMITATIONS, ALTERNATE TYPE A FOUNDATIONS WITH SMALLER DIAMETERS MAY BE USED IF APPROVED BY THE BUREAU OF HIGHWAY SAFETY AND TRAFFIC ENGINEERING. SEE SHEET 7 FOR ALTERNATE TYPE A FOUNDATION DETAILS.
8. EMBANKMENT SLOPE AS ILLUSTRATED IN PUBLICATION 72M (RC-83M) SHEET 3 OF 3. 2:1 MAXIMUM SLOPE. STEEPER SLOPES REQUIRE SPECIAL DESIGN.

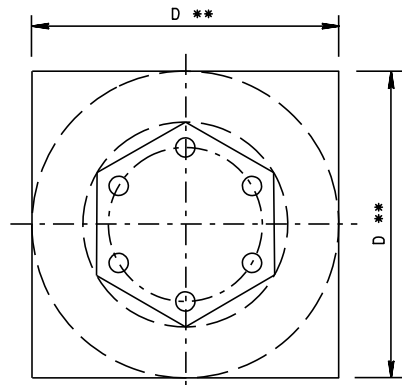


PLAN

** DIAMETER IF CIRCULAR, OR SIDE IF SQUARE. CIRCULAR FOUNDATIONS SHALL BE SQUARE FROM THE TOP TO A POINT 6" BELOW THE GROUND LINE, IF SIDEWALK IS PRESENT

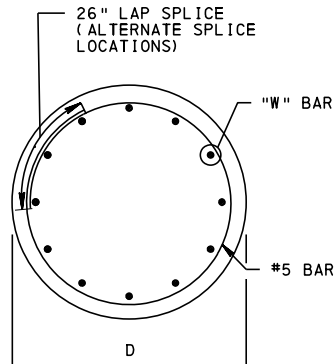


SECTION A-A

CLOSED TIE DETAIL
CASES 1 AND 2

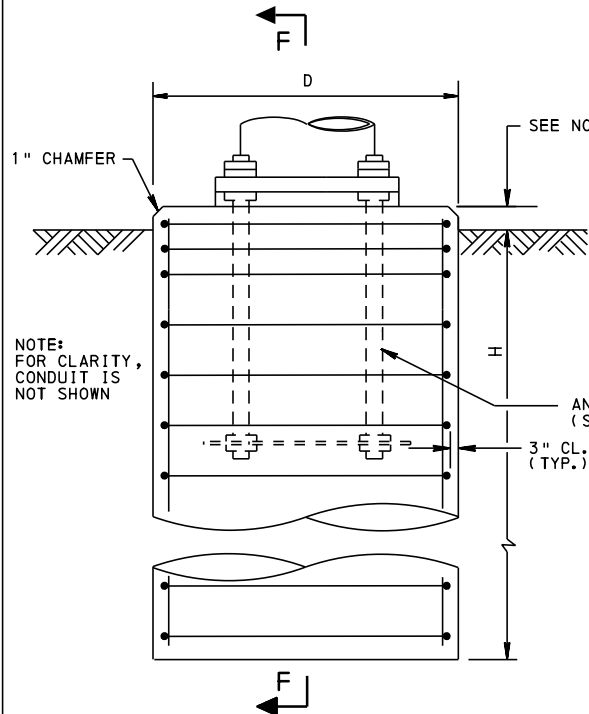


SECTION

TYPE A FOUNDATION
CASE 1

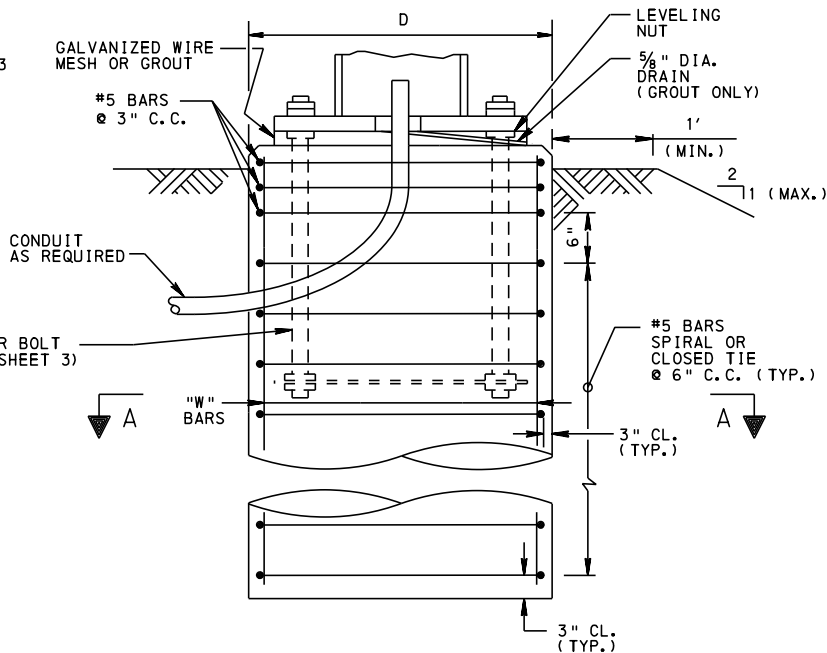

SECTION F-F

NOTE: 6-ANCHOR BOLT CONFIGURATION SHOWN IS FOR MAST ARM & STRAIN POLE TRAFFIC SIGNAL SUPPORTS. 4-ANCHOR BOLT CONFIGURATION FOR PEDESTAL POLE TRAFFIC SIGNAL SUPPORTS IS SIMILAR.

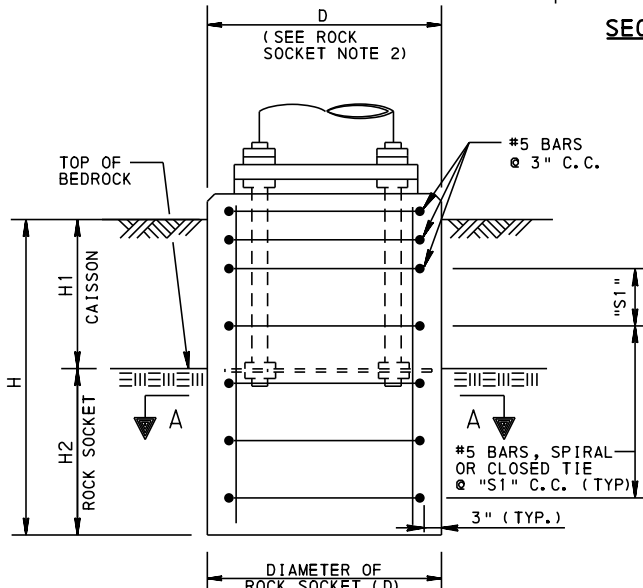


TYPE A FOUNDATION
CASE 2

STIRRUP SPACING COMBINATION		S1
32 FT STRAIN POLE, 10,000 LB (CASE 5)		5"
34 FT STRAIN POLE, 10,000 LB (CASE 5)		5"
ALL OTHER COMBINATIONS		6"


ROCK SOCKET NOTES:

1. IF ROCK STRATUM IS ENCOUNTERED, USE THE TABLES PRESENTED FOR CASES 2 THROUGH 4. ROCK STRATUM IS DEFINED IN ACCORDANCE WITH PUB. 408, SECTION 1006.1(d). FOR CASES 3 AND 4, INCREASE CAISSON DIAMETER "D" BY 6" AND INSTALL STEEL CAISSON TO TOP OF ROCK TO STABILIZE SOIL DURING ROCK AUGERING. STEEL CASING MAY BE PERMANENTLY LEFT IN PLACE OR REMOVED IN ACCORDANCE WITH PUB. 408, SECTION 1006. IF A STEEL CASING IS REQUIRED FOR CASE 2, INCREASE CAISSON DIAMETER "D" BY 6".
2. ROCK CASES ARE DEFINED AS FOLLOWS:
 - CASE 2: $0' \leq H1 < 5'$
 - CASE 3: $5' \leq H1 < 10'$
 - CASE 4: $H1 \geq 10'$
3. THE ROCK SOCKET DETAILS PRESENTED WITHIN THIS STANDARD ARE BASED ON ROCK PARAMETERS ON SHEET 3. ALTERNATE FOUNDATION SIZES AND TYPES MAY BE PERMITTED FOR DIFFERENT ROCK CONDITIONS PROVIDED THAT ACTUAL GEOTECHNICAL CONDITIONS ARE VALIDATED AND THE FOUNDATION DESIGN MEETS APPLICABLE CRITERIA FOR STRENGTH AND SERVICEABILITY. SUBMIT ALTERNATE FOUNDATION DESIGNS TO THE DISTRICT FOR REVIEW AND APPROVAL.
4. THE TOTAL CAISSON AND ROCK SOCKET DEPTH "H" NEED NOT EXCEED THE TOTAL CAISSON DEPTH "H" FOR CASE 1 UNLESS DIRECTED OTHERWISE.
5. FOR DETAILS NOT SHOWN, SEE TYPE A FOUNDATION DETAIL FOR CASE 1 ON THIS SHEET.

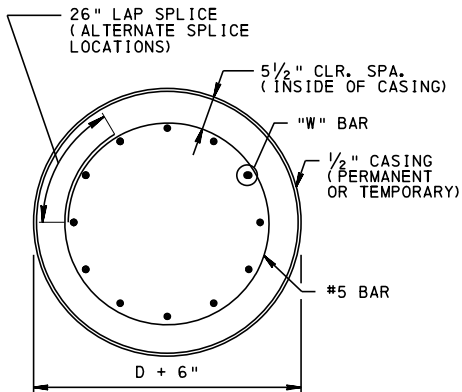


SECTION B-B

CLOSED TIE DETAILS
CASES 3 AND 4

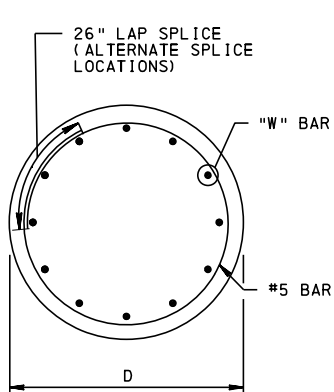

SECTION C-C

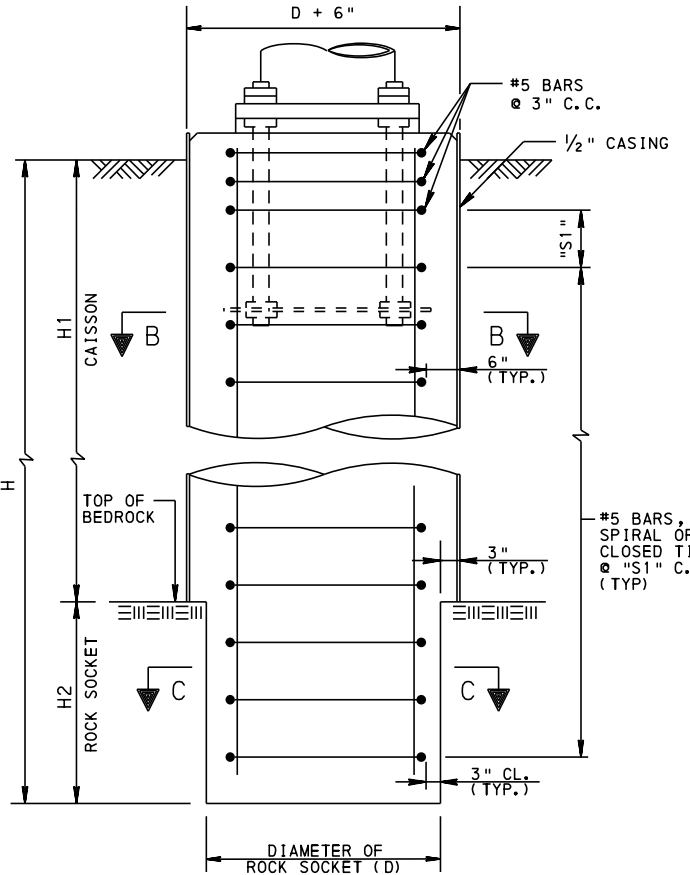

TYPE A FOUNDATION
CASES 3 AND 4

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF OPERATIONS

STANDARD

TRAFFIC SIGNAL SUPPORT
FOUNDATION TYPE A

RECOMMENDED JAN 27, 2025
CHIEF, T&MO ARTERIALS AND PLANNING SECTION

RECOMMENDED JAN 27, 2025
CHIEF OF HIGHWAY SAFETY AND TRAFFIC OPERATIONS DIVISION

SHEET 4 OF 10

TC-8801

MAST ARM FOUNDATION NOTES:

1. FOUNDATION DESIGN IS BASED ON STANDARD STRUCTURAL LOADINGS SHOWN IN THE PUBLICATION 149 AND THE FOLLOWING DESIGN ASSUMPTIONS:
- a. CENTROIDAL HEIGHT OF SIGNALS AND SIGNS ATTACHED TO THE MAST ARM AT 20' MAXIMUM FROM THE TOP OF FOUNDATION.

b. A LUMINAIRE WITH A 15' ARM LENGTH AND A 30' MOUNTING HEIGHT FROM THE TOP OF ROADWAY.

c. A CABINET WITH A 4'-3" HEIGHT, 2'-6" WIDTH, 1'-10" DEPTH AND A DEAD LOAD OF 281 LBS. THE CENTROIDAL HEIGHT IS LOCATED 4'-6" FROM THE TOP OF THE FOUNDATION.
2. WHEN THE MAST ARM SUPPORT HAS TWO ARMS WHICH ARE PERPENDICULAR TO EACH OTHER, USE THE FOUNDATION IN THE DESIGN TABLE FOR THE LENGTH OF THE LONGER ARM.
3. FOR DEFINITION OF CASES, SEE DRILLED SHAFT DESIGN CRITERIA ON SHEET 3 AND DETAILS ON SHEET 4.
4. EMBANKMENT SLOPE AS ILLUSTRATED IN PUBLICATION 72M (RC-83M) SHEET 3 OF 3. 2:1 MAXIMUM SLOPE. STEEPER SLOPES REQUIRE SPECIAL DESIGN.

FOUNDATION FOR TRAFFIC SIGNAL SUPPORT, MAST ARM
(SOIL CONDITION)

CASE 1					
MAST ARM LENGTH	"D "	H		"W" BAR	
		ONE ARM	TWO ARMS*	QTY.	SIZE
0' - 10'	3'-0"	7'-0"	7'-6"	12	#9
>10' - 15'	3'-0"	8'-0"	8'-0"	12	#9
>15' - 20'	3'-0"	8'-6"	9'-0"	12	#9
>20' - 25'	3'-0"	9'-0"	9'-0"	12	#9
>25' - 30'	3'-0"	9'-6"	10'-0"	12	#9
>30' - 35'	3'-0"	10'-0"	10'-6"	12	#9
>35' - 40'	3'-6"	10'-0"	10'-6"	14	#9
>40' - 45'	3'-6"	10'-0"	11'-0"	14	#9
>45' - 50'	3'-6"	10'-6"	11'-6"	14	#9
>50' - 60'	3'-6"	11'-0"	12'-6"	14	#9

* TWO ARMS PERPENDICULAR TO EACH OTHER. ADDITIONAL STRUCTURAL ANALYSIS IS REQUIRED FOR TWO MAST ARMS AT ACUTE OR OBTUSE ANGLES TO EACH OTHER.

FOUNDATION FOR TRAFFIC SIGNAL SUPPORT, MAST ARM
(ROCK CONDITION)

MAST ARM LENGTH	"D" **	CASE 2 [0' ≤ H1 < 5']		CASE 3 [5' ≤ H1 < 10']		CASE 4 [H1 ≥ 10']		"W" BAR	
		H2		H2 ***		H2 ***			
		ONE ARM	TWO ARMS*	ONE ARM	TWO ARMS*	ONE ARM	TWO ARMS*	QTY.	
0 - 10'	3'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	12	#9
>10' - 15'	3'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	12	#9
>15' - 20'	3'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	12	#9
>20' - 25'	3'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	12	#9
>25' - 30'	3'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	12	#9
>30' - 35'	3'-0"	4'-0"	4'-6"	4'-0"	4'-0"	4'-0"	4'-0"	12	#9
>35' - 40'	3'-6"	4'-0"	4'-6"	4'-0"	4'-0"	4'-0"	4'-0"	14	#9
>40' - 45'	3'-6"	4'-0"	4'-6"	4'-0"	4'-6"	4'-0"	4'-0"	14	#9
>45' - 50'	3'-6"	4'-0"	4'-6"	4'-0"	4'-6"	4'-0"	4'-0"	14	#9
>50' - 60'	3'-6"	4'-6"	5'-6"	4'-6"	5'-0"	4'-0"	4'-0"	14	#9

** INCREASE CAISSON DIAMETER BY 6" AS APPLICABLE IN ACCORDANCE WITH ROCK SOCKET NOTE 1 ON SHEET 4.

*** SEE ROCK SOCKET NOTE 4 ON SHEET 4 FOR TOTAL "H" DEPTH REQUIREMENTS.

FOUNDATION FOR TRAFFIC SIGNAL SUPPORT, PEDESTAL POLE
DESIGN TABLE (SOIL CONDITION)

CASE 1				
SHAFT LENGTH	"D "	H	"W" BAR	
			QTY.	SIZE
7' - 10'	3'-0"	5'-0"	8	#8
>10' - 14'	3'-0"	5'-6"	8	#8

FOUNDATION FOR TRAFFIC SIGNAL SUPPORT, PEDESTAL POLE
DESIGN TABLE (ROCK CONDITION)

SHAFT LENGTH	"D "	CASE 2 [0' ≤ H1 < 5']		
		H2	"W" BAR	
			QTY.	SIZE
7' - 10'	3'-0"	4'-0"	8	#8
>10' - 14'	3'-0"	4'-0"	8	#8

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF OPERATIONS

STANDARD

TRAFFIC SIGNAL SUPPORT -
MAST ARM & PEDESTAL
FOUNDATION TYPE A

RECOMMENDED JAN 27, 2025

CHIEF, T&MO ARTERIALS AND
PLANNING SECTION

RECOMMENDED JAN 27, 2025

CHIEF OF HIGHWAY SAFETY AND
TRAFFIC OPERATIONS DIVISION

SHEET 5 OF 10

TC-8801

FOUNDATION FOR TRAFFIC SIGNAL SUPPORT, STRAIN POLE
(SOIL CONDITION)

DESIGN TENSION (LBS)	"D "	SHAFT LENGTH 20' - 34' (CASE 1)									
		"W" BAR		20' SHAFT	22' SHAFT	24' SHAFT	26' SHAFT	28' SHAFT	30' SHAFT	32' SHAFT	34' SHAFT
		QTY.	SIZE	FOUNDATION DEPTH H	FOUNDATION DEPTH H	FOUNDATION DEPTH H	FOUNDATION DEPTH H	FOUNDATION DEPTH H	FOUNDATION DEPTH H	FOUNDATION DEPTH H	FOUNDATION DEPTH H
1000	3'-0"	12	#9	7'-6"	7'-6"	7'-6"	8'-0"	8'-0"	8'-0"	8'-6"	8'-6"
2000	3'-0"	12	#9	8'-6"	8'-6"	8'-6"	9'-0"	9'-0"	9'-0"	9'-6"	9'-6"
3000	3'-0"	12	#9	9'-0"	9'-0"	9'-6"	9'-6"	10'-0"	10'-0"	10'-6"	10'-6"
4000	3'-0"	12	#9	9'-6"	10'-0"	10'-0"	10'-6"	10'-6"	11'-0"	11'-0"	11'-6"
5000	3'-0"	12	#9	10'-0"	10'-6"	10'-6"	11'-0"	11'-6"	11'-6"	12'-0"	12'-0"
6000	3'-0"	12	#9	11'-0"	11'-0"	11'-6"	12'-0"	12'-0"	12'-6"	12'-6"	13'-0"
7000	3'-0"	18	#9	11'-6"	11'-6"	12'-0"	12'-6"	12'-6"	13'-0"	13'-6"	14'-0"
8000	3'-0"	18	#9	12'-0"	12'-6"	12'-6"	13'-0"	13'-6"	14'-0"	14'-6"	14'-6"
9000	3'-0"	18	#9	12'-6"	13'-0"	13'-6"	14'-0"	14'-6"	14'-6"	15'-0"	15'-6"
10000	3'-0"	18	#9	13'-0"	13'-6"	14'-0"	14'-6"	15'-0"	15'-0"	15'-6"	16'-0"

FOUNDATION FOR TRAFFIC SIGNAL SUPPORT, STRAIN POLE
(ROCK CONDITION)

DESIGN TENSION (LBS)	"D " *	CASE 2 [0' ≤ H1 < 5']									
		"W" BAR		20' SHAFT	22' SHAFT	24' SHAFT	26' SHAFT	28' SHAFT	30' SHAFT	32' SHAFT	34' SHAFT
		QTY.	SIZE	ROCK SOCKET EMBEDMENT H2	ROCK SOCKET EMBEDMENT H2	ROCK SOCKET EMBEDMENT H2	ROCK SOCKET EMBEDMENT H2	ROCK SOCKET EMBEDMENT H2	ROCK SOCKET EMBEDMENT H2	ROCK SOCKET EMBEDMENT H2	ROCK SOCKET EMBEDMENT H2
1000	3'-0"	12	#9	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"
2000	3'-0"	12	#9	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"
3000	3'-0"	12	#9	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-6"	4'-6"
4000	3'-0"	12	#9	4'-0"	4'-0"	4'-0"	4'-6"	4'-6"	4'-6"	4'-6"	5'-0"
5000	3'-0"	12	#9	4'-0"	4'-6"	4'-6"	4'-6"	4'-6"	5'-0"	5'-0"	5'-0"
6000	3'-0"	12	#9	4'-6"	4'-6"	4'-6"	5'-0"	5'-0"	5'-6"	5'-6"	5'-6"
7000	3'-0"	12	#9	4'-6"	5'-0"	5'-0"	5'-6"	5'-6"	5'-6"	6'-0"	6'-0"
8000	3'-0"	16	#9	5'-0"	5'-0"	5'-6"	5'-6"	5'-6"	6'-0"	6'-0"	6'-6"
9000	3'-0"	16	#9	5'-0"	5'-6"	5'-6"	6'-0"	6'-0"	6'-0"	6'-6"	6'-6"
10,000	3'-0"	16	#9	5'-6"	5'-6"	6'-0"	6'-0"	6'-6"	6'-6"	7'-0"	7'-0"

DESIGN TENSION (LBS)	"D " *	CASE 3 [5' ≤ H1 < 10']									
		"W" BAR		20' SHAFT	22' SHAFT	24' SHAFT	26' SHAFT	28' SHAFT	30' SHAFT	32' SHAFT	34' SHAFT
		QTY.	SIZE	ROCK SOCKET EMBEDMENT H2 **	ROCK SOCKET EMBEDMENT H2 **	ROCK SOCKET EMBEDMENT H2 **	ROCK SOCKET EMBEDMENT H2 **	ROCK SOCKET EMBEDMENT H2 **	ROCK SOCKET EMBEDMENT H2 **	ROCK SOCKET EMBEDMENT H2 **	ROCK SOCKET EMBEDMENT H2 **
1000	3'-0"	12	#9	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"
2000	3'-0"	12	#9	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"
3000	3'-0"	12	#9	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"
4000	3'-0"	12	#9	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-6"	4'-6"	4'-6"
5000	3'-0"	12	#9	4'-0"	4'-0"	4'-6"	4'-6"	4'-6"	4'-6"	5'-0"	5'-0"
6000	3'-0"	18	#9	4'-6"	4'-6"	4'-6"	5'-0"	5'-0"	5'-0"	5'-6"	5'-6"
7000	3'-0"	18	#9	4'-6"	5'-0"	5'-0"	5'-6"	5'-6"	5'-6"	6'-0"	6'-0"
8000	3'-0"	18	#9	5'-0"	5'-0"	5'-6"	5'-6"	5'-6"	6'-0"	6'-0"	6'-6"
9000	3'-0"	18	#9	5'-6"	5'-6"	5'-6"	6'-0"	6'-0"	6'-0"	6'-6"	6'-6"
10,000	3'-0"	18	#9	5'-6"	5'-6"	6'-0"	6'-0"	6'-6"	6'-6"	7'-0"	7'-0"

DESIGN TENSION (LBS)	"D " *	CASE 4 [H1 ≥ 10']									
		"W" BAR		20' SHAFT	22' SHAFT	24' SHAFT	26' SHAFT	28' SHAFT	30' SHAFT	32' SHAFT	34' SHAFT
		QTY.	SIZE	ROCK SOCKET EMBEDMENT H2 **	ROCK SOCKET EMBEDMENT H2 **	ROCK SOCKET EMBEDMENT H2 **	ROCK SOCKET EMBEDMENT H2 **	ROCK SOCKET EMBEDMENT H2 **	ROCK SOCKET EMBEDMENT H2 **	ROCK SOCKET EMBEDMENT H2 **	ROCK SOCKET EMBEDMENT H2 **
1000	3'-0"	12	#9	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"
2000	3'-0"	12	#9	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"
3000	3'-0"	12	#9	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"
4000	3'-0"	12	#9	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"
5000	3'-0"	12	#9	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"
6000	3'-0"	12	#9	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"
7000	3'-0"	18	#9	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-0"	4'-6"	4'-6"
8000	3'-0"	18	#9	4'-0"	4'-0"	4'-0"	4'-0"	4'-6"	4'-6"	5'-0"	5'-0"
9000	3'-0"	18	#9	4'-0"	4'-0"	4'-6"	4'-6"	4'-6"	5'-0"	5'-0"	5'-6"
10,000	3'-0"	18	#9	4'-6"	4'-6"	4'-6"	5'-0"	5'-0"	5'-6"	5'-6"	5'-6"

* INCREASE CAISSON DIAMETER BY 6" AS APPLICABLE IN ACCORDANCE WITH ROCK SOCKET NOTE 1 ON SHEET 4.

** SEE ROCK SOCKET NOTE 4 ON SHEET 4 FOR TOTAL "H" DEPTH REQUIREMENTS.

STRAIN POLE FOUNDATION NOTES:

1. FOUNDATION DESIGN IS BASED ON STANDARD STRUCTURAL LOADINGS SHOWN IN THE PUBLICATION 149 AND THE FOLLOWING DESIGN ASSUMPTIONS:

a. A CABINET WITH A 4'-3" HEIGHT, 2'-6" WIDTH, 1'-10" DEPTH AND A DEAD LOAD OF 281 LBS. THE CENTROIDAL HEIGHT IS LOCATED 4'-6" FROM THE TOP OF THE FOUNDATION.

b. A LUMINAIRE WITH A 15' ARM LENGTH AND THE FOLLOWING MOUNTING HEIGHTS FROM THE TOP OF ROADWAY:

LENGTH OF STRAIN POLE	LUMINAIRE MOUNTING HEIGHT "X"
20' , 22' , AND 24'	30'
26' , 28' , AND 30'	35'
32' AND 34'	40'

2. FOR DEFINITION OF CASES, SEE DRILLED SHAFT NOTES ON SHEET 3 AND DETAILS ON SHEET 4.
3. EMBANKMENT SLOPE AS ILLUSTRATED IN PUBLICATION 72M (RC-83M) SHEET 3 OF 3. 2:1 MAXIMUM SLOPE. STEEPER SLOPES REQUIRE SPECIAL DESIGN.

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF OPERATIONS

STANDARD

TRAFFIC SIGNAL SUPPORT - STRAIN POLE
FOUNDATION TYPE A

RECOMMENDED JAN 27, 2025



CHIEF, T&MO ARTERIALS AND
PLANNING SECTION

RECOMMENDED JAN 27, 2025

CHIEF OF HIGHWAY SAFETY AND
TRAFFIC OPERATIONS DIVISION

SHEET 6 OF 10

TC-8801

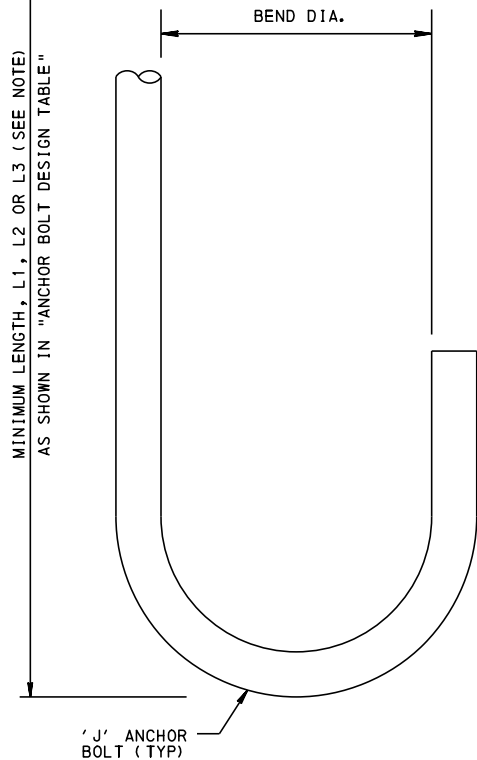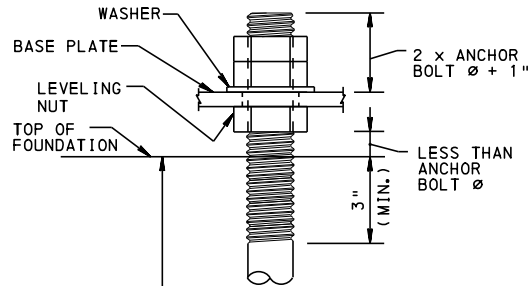

'J' ANCHOR BOLT


NOTE: DUE TO OVERLAPPING 'J' ANCHOR BOLTS, VARY EMBEDMENT BY 6" FOR EACH 2-BOLT PAIR FOR 1 3/4" DIA. BOLTS AND BY 12" FOR EACH 2-BOLT PAIR FOR 2" DIA. BOLTS. SEE L1, L2 AND L3 EMBEDMENT DEPTHS IN ANCHOR BOLT DESIGN TABLE.

ANCHOR BOLT DESIGN, MAST ARM


MAST ARM LENGTH	QTY.	ONE ARM							TWO ARMS *						
		BOLT DIA.	BEND DIA.	L1	L2	L3	B. C.	HOLE	BOLT DIA.	BEND DIA.	L1	L2	L3	B. C.	HOLE
0 - 10'	6	1 3/4"	17 1/2"	42"	48"	54"	18"	2"	1 3/4"	17 1/2"	42"	48"	54"	18"	2"
>10' - 15'	6	1 3/4"	17 1/2"	42"	48"	54"	18"	2"	1 3/4"	17 1/2"	42"	48"	54"	18"	2"
>15' - 20'	6	1 3/4"	17 1/2"	42"	48"	54"	18"	2"	1 3/4"	17 1/2"	42"	48"	54"	18"	2"
>20' - 25'	6	1 3/4"	17 1/2"	42"	48"	54"	18"	2"	1 3/4"	17 1/2"	42"	48"	54"	18"	2"
>25' - 30'	6	1 3/4"	17 1/2"	42"	48"	54"	21"	2"	1 3/4"	17 1/2"	42"	48"	54"	21"	2"
>30' - 35'	6	1 3/4"	17 1/2"	42"	48"	54"	21"	2"	1 3/4"	17 1/2"	42"	48"	54"	21"	2"
>35' - 40'	6	2"	22"	48"	60"	72"	24"	2 1/4"	2"	22"	48"	60"	72"	24"	2 1/4"
>40' - 45'	6	2"	22"	48"	60"	72"	24"	2 1/4"	2"	22"	48"	60"	72"	24"	2 1/4"
>45' - 50'	6	2"	22"	48"	60"	72"	24"	2 1/4"	2"	22"	48"	60"	72"	24"	2 1/4"
>50' - 60'	6	2"	22"	48"	60"	72"	24"	2 1/4"	2"	22"	48"	60"	72"	24"	2 1/4"

* TWO ARMS PERPENDICULAR TO EACH OTHER. ADDITIONAL STRUCTURAL ANALYSIS IS REQUIRED FOR TWO MAST ARMS AT ACUTE OR OBTUSE ANGLES TO EACH OTHER


B. C. = BOLT CIRCLE DIAMETER

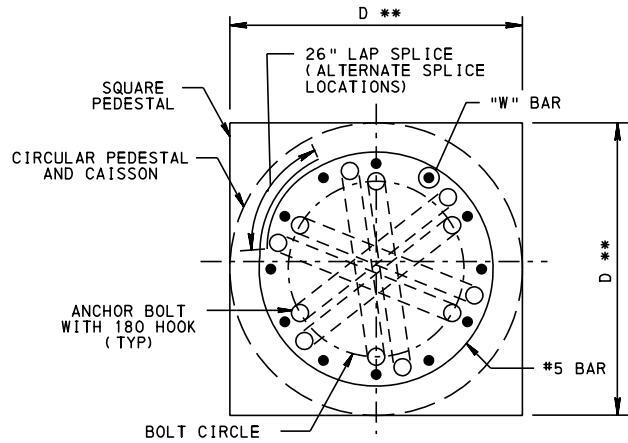

18" DIA. BOLT CIRCLE

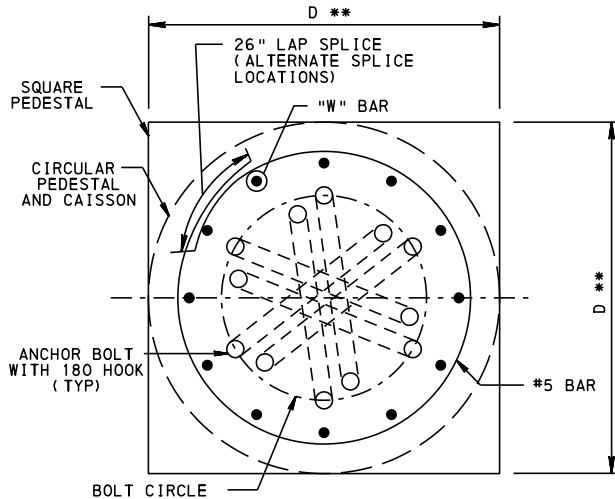


21" DIA. BOLT CIRCLE

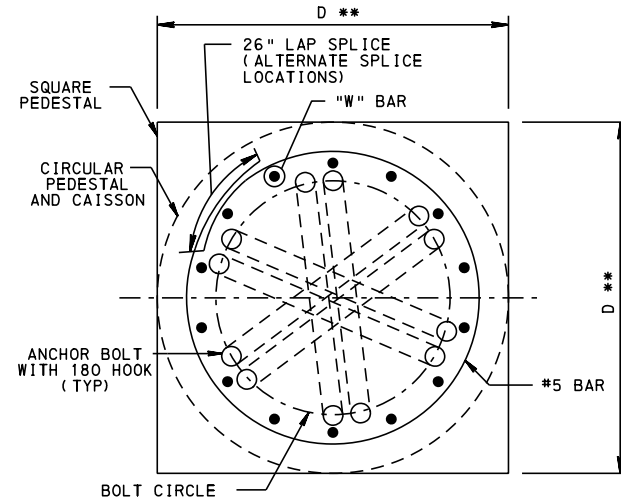


24" DIA. BOLT CIRCLE

PLAN ** DIAMETER IF CIRCULAR, OR SIDE IF SQUARE. CIRCULAR FOUNDATIONS SHALL BE SQUARE FROM THE TOP TO A POINT 6" BELOW THE GROUND LINE, IF SIDEWALK IS PRESENT

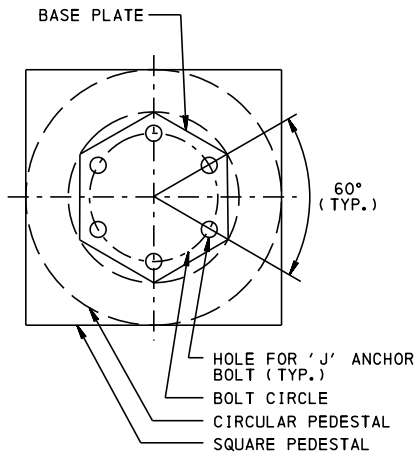

BASE MOUNT PLAN

NOTE: A MINIMUM OF 6 'J' ANCHOR BOLTS IS REQUIRED FOR MAST ARM TRAFFIC SIGNAL SUPPORTS.

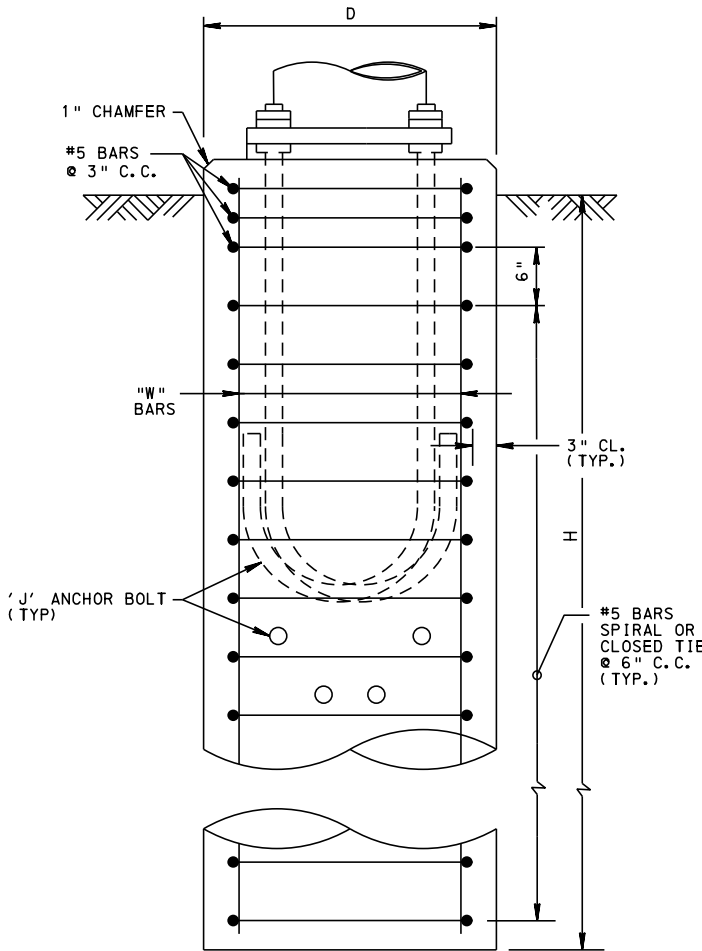

SECTION

TYPE A FOUNDATION CASE 1 ALTERNATE

FOUNDATION FOR TRAFFIC SIGNAL SUPPORT, MAST ARM (SOIL CONDITION)

MAST ARM LENGTH	"D"	H		"W" BAR	QTY.	SIZE
		ONE ARM	TWO ARMS*			
0' - 10'	2'-6"	7'-6"	7'-6"	12	#9	
>10' - 15'	2'-6"	8'-0"	8'-6"	12	#9	
>15' - 20'	2'-6"	9'-0"	9'-0"	12	#9	
>20' - 25'	2'-6"	9'-0"	9'-6"	12	#9	
>25' - 30'	3'-0"	9'-6"	10'-0"	12	#9	
>30' - 35'	3'-0"	10'-0"	10'-6"	12	#9	
>35' - 40'	3'-0"	10'-6"	11'-0"	14	#9	
>40' - 45'	3'-0"	10'-6"	11'-6"	14	#9	
>45' - 50'	3'-0"	11'-0"	12'-0"	14	#9	
>50' - 60'	3'-0"	11'-6"	13'-0"	14	#9	

* TWO ARMS PERPENDICULAR TO EACH OTHER. ADDITIONAL STRUCTURAL ANALYSIS IS REQUIRED FOR TWO MAST ARMS AT ACUTE OR OBTUSE ANGLES TO EACH OTHER.

ALTERNATE TYPE A FOUNDATIONS AS SHOWN ON THIS SHEET REQUIRE APPROVAL BY THE BUREAU OF OPERATIONS.

MAST ARM FOUNDATION TYPE A ALTERNATE NOTES:

1. FOR ADDITIONAL DESIGN CRITERIA, NOTES AND DETAILS, SEE SHEETS 3 THROUGH 5.

COMMONWEALTH OF PENNSYLVANIA DEPARTMENT OF TRANSPORTATION BUREAU OF OPERATIONS

STANDARD

TRAFFIC SIGNAL SUPPORT - MAST ARM FOUNDATION TYPE A ALTERNATE

RECOMMENDED JAN 27, 2025

CHIEF, TSMO ARTERIALS AND PLANNING SECTION

RECOMMENDED JAN 27, 2025

CHIEF OF HIGHWAY SAFETY AND TRAFFIC OPERATIONS DIVISION

SHEET 7 OF 10

TC-8801


FOUNDATION FOR TRAFFIC SIGNAL SUPPORT, MAST ARM

MAST ARM LENGTH	"D"	"W" BAR		"L" BAR	Y	S		Z	S	
		QTY.	SIZE	SIZE		ONE ARM	TWO ARMS*		ONE ARM	TWO ARMS*
0 - 10'	3'-0"	12	#9	#4	4'-0"	9'-6"	9'-6"	5'-0"	9'-6"	9'-6"
>10' - 15'	3'-0"	12	#9	#4	4'-0"	10'-6"	10'-6"	5'-0"	10'-6"	10'-6"
>15' - 20'	3'-0"	12	#9	#5	4'-0"	11'-6"	11'-6"	5'-6"	11'-6"	11'-6"
>20' - 25'	3'-0"	12	#9	#6	4'-0"	12'-0"	12'-0"	6'-0"	12'-0"	12'-0"
>25' - 30'	3'-0"	12	#9	#6	4'-6"	12'-6"	13'-0"	6'-6"	12'-6"	12'-6"
>30' - 35'	3'-0"	12	#9	#7	4'-6"	13'-0"	13'-6"	7'-0"	13'-0"	13'-6"
>35' - 40'	3'-6"	14	#9	#7	5'-0"	13'-6"	14'-0"	7'-0"	13'-0"	13'-6"
>40' - 45'	3'-6"	14	#9	#7	5'-0"	13'-6"	14'-6"	7'-6"	13'-0"	13'-6"
>45' - 50'	3'-6"	14	#9	#7	5'-6"	14'-0"	14'-6"	8'-0"	13'-0"	13'-6"
>50' - 60'	3'-6"	14	#9	#8	5'-6"	14'-6"	16'-0"	8'-0"	13'-6"	14'-6"

* TWO ARMS PERPENDICULAR TO EACH OTHER. ADDITIONAL STRUCTURAL ANALYSIS IS REQUIRED FOR TWO MAST ARMS AT ACUTE OR OBTUSE ANGLES TO EACH OTHER.

NOTES:

- THE TYPE "B" FOUNDATION MAY BE AUTHORIZED FOR USE WHERE CONDITIONS PREVENT PLACING THE TYPE "A" FOUNDATION (AS SHOWN ON SHEET 4) TO ITS REQUIRED DEPTH.
- FOR DESIGN CRITERIA SEE SHEET 3.
- IN A SIDEWALK AND PAVED AREA, PLACE THE TOP OF FOUNDATION FLUSH WITH THE SURFACE OF THE ADJACENT PAVEMENT. IN UNPAVED AREAS TOP OF FOUNDATION TO BE AT LEAST 6" ABOVE TOP OF GROUND.
- FOR GROUND ROD SIZE AND INSTALLATION DETAILS, SEE TC-8804.
- DISTANCE "F" AS REQUIRED TO AVOID PAVEMENT AND/OR CURB EXCAVATION.
- SEE SHEET 4 FOR CLOSED TIE DETAIL.
- SEE MAST ARM FOUNDATION NOTES 1 AND 2 ON SHEET 5.

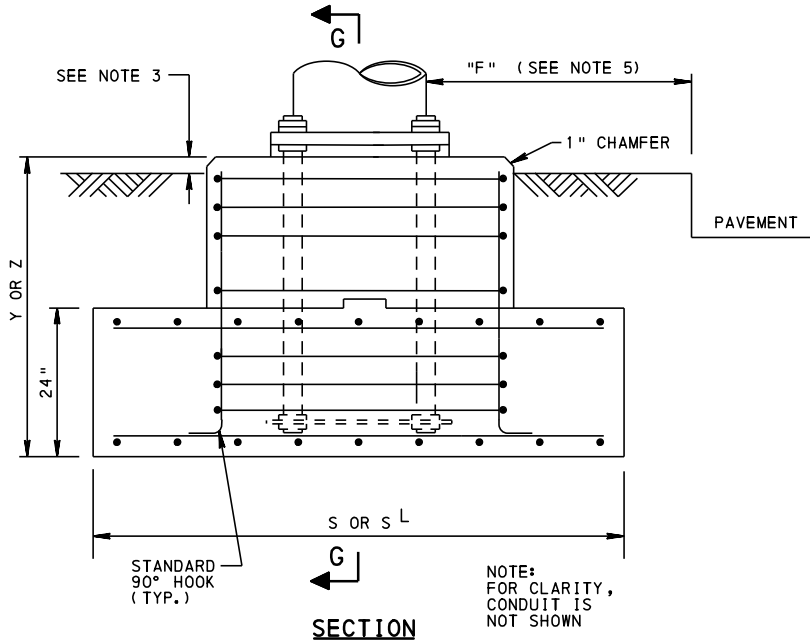


TYPE B FOUNDATION

FOUNDATION FOR TRAFFIC SIGNAL SUPPORT, STRAIN POLE

DESIGN TENSION (LBS)	SHAFT LENGTH 20' - 24'										SHAFT LENGTH 26' - 30'										SHAFT LENGTH 32' - 34'									
	"D"	"W" BAR QTY.	"L" BAR SIZE	"L" BAR SIZE	Y	S ^L	S	Z	S ^L	S	"D"	"W" BAR QTY.	"L" BAR SIZE	"L" BAR SIZE	Y	S ^L	S	Z	S ^L	S	"D"	"W" BAR QTY.	"L" BAR SIZE	"L" BAR SIZE	Y	S ^L	S	Z	S ^L	S
1000	3'-0"	12	#9	#4	4'-0"	9'-6"	9'-0"	4'-0"	9'-6"	9'-0"	3'-0"	12	#9	#4	4'-0"	10'-6"	10'-6"	4'-0"	10'-6"	10'-0"	3'-0"	12	#9	#4	4'-0"	11'-0"	10'-6"	4'-0"	11'-0"	10'-6"
2000	3'-0"	12	#9	#4	4'-0"	10'-6"	10'-6"	4'-0"	10'-6"	10'-6"	3'-0"	12	#9	#5	4'-0"	12'-0"	12'-0"	4'-0"	12'-0"	11'-6"	3'-0"	12	#9	#5	4'-0"	12'-6"	12'-0"	4'-0"	12'-6"	12'-0"
3000	3'-0"	12	#9	#5	4'-0"	11'-6"	11'-6"	4'-0"	12'-0"	11'-6"	3'-0"	12	#9	#5	4'-0"	13'-0"	13'-0"	5'-0"	12'-6"	12'-0"	3'-0"	12	#9	#6	4'-0"	13'-6"	13'-0"	5'-0"	12'-6"	12'-6"
4000	3'-0"	12	#9	#5	4'-0"	12'-6"	12'-0"	5'-0"	12'-0"	12'-6"	3'-0"	12	#9	#6	4'-6"	14'-0"	14'-0"	6'-0"	12'-6"	12'-6"	3'-0"	12	#9	#6	4'-6"	14'-0"	14'-0"	6'-0"	13'-0"	13'-0"
5000	3'-0"	12	#9	#6	4'-6"	13'-0"	12'-6"	6'-0"	12'-0"	12'-6"	3'-0"	12	#9	#6	5'-0"	14'-6"	14'-6"	6'-6"	13'-0"	13'-0"	3'-0"	12	#9	#7	5'-0"	14'-6"	14'-6"	6'-6"	13'-6"	13'-0"
6000	3'-0"	12	#9	#6	5'-0"	13'-0"	13'-0"	6'-6"	12'-6"	12'-6"	3'-0"	12	#9	#7	5'-6"	14'-6"	14'-6"	7'-0"	13'-6"	13'-0"	3'-0"	12	#9	#7	5'-6"	14'-6"	14'-6"	7'-0"	14'-0"	13'-6"
7000	3'-0"	12	#9	#7	5'-0"	13'-6"	13'-6"	7'-0"	13'-0"	13'-0"	3'-0"	12	#9	#7	6'-0"	15'-0"	15'-0"	8'-0"	13'-6"	13'-6"	3'-0"	16	#9	#8	6'-0"	15'-0"	15'-0"	8'-0"	14'-0"	13'-6"
8000	3'-0"	12	#9	#7	5'-6"	14'-0"	14'-0"	7'-6"	13'-0"	13'-0"	3'-0"	12	#9	#8	6'-6"	15'-6"	15'-6"	8'-6"	13'-6"	13'-6"	3'-0"	16	#9	#8	6'-6"	15'-6"	15'-6"	8'-6"	14'-0"	14'-0"
9000	3'-0"	12	#9	#7	6'-0"	14'-0"	14'-0"	8'-0"	13'-6"	13'-6"	3'-0"	16	#9	#8	7'-0"	15'-6"	15'-6"	9'-0"	14'-0"	13'-6"	3'-0"	16	#9	#9	7'-0"	15'-6"	15'-6"	9'-0"	14'-6"	14'-6"
10,000	3'-0"	12	#9	#8	6'-6"	14'-6"	14'-0"	8'-6"	13'-6"	13'-6"	3'-0"	16	#9	#9	7'-6"	15'-6"	15'-6"	10'-0"	14'-0"	14'-0"	3'-0"	16	#9	#9	7'-6"	15'-6"	15'-6"	10'-0"	14'-6"	14'-6"

S^L = WITH LUMINAIRE

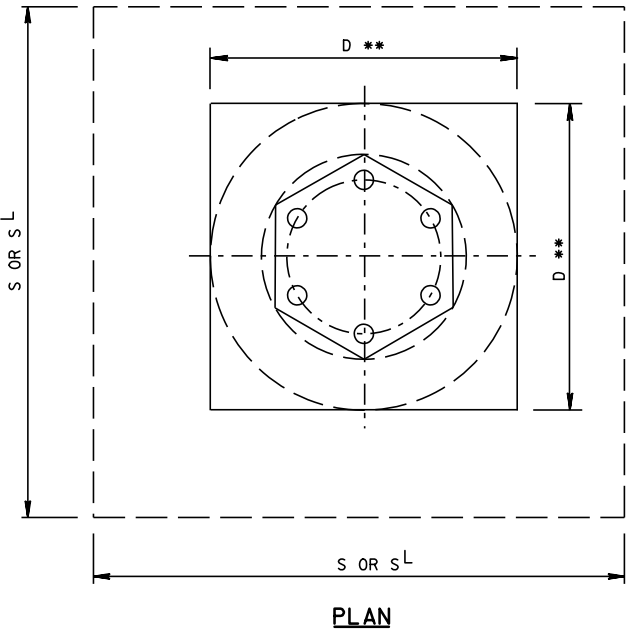

** DIAMETER IF CIRCULAR, OR SIDE IF SQUARE. CIRCULAR FOUNDATIONS SHALL BE SQUARE FROM THE TOP TO A POINT 6" BELOW THE GROUND LINE, IF SIDEWALK IS PRESENT.

STRAIN POLE FOUNDATION NOTES:

- FOUNDATION DESIGN IS BASED ON STANDARD STRUCTURAL LOADINGS SHOWN IN THE PUBLICATION 149 AND THE FOLLOWING DESIGN ASSUMPTIONS:
 - A CABINET WITH A 4'-3" HEIGHT, 2'-6" WIDTH, 1'-10" DEPTH AND A DEAD LOAD OF 281 LBS. THE CENTROIDAL HEIGHT IS LOCATED 4'-6" FROM THE TOP OF THE FOUNDATION.
- USE DIMENSION "S^L" IN THE TABLE WHEN A LUMINAIRE ARM OR A STUB IS SPECIFIED (STUB UTILIZED FOR AN OVERLAP SLIP JOINT FOR FUTURE LUMINAIRE ARM INSTALLATION). THE DESIGN ASSUMES A 15' LUMINAIRE ARM LENGTH AND THE FOLLOWING MOUNTING HEIGHTS FROM THE TOP OF ROADWAY:

LENGTH OF STRAIN POLE	LUMINAIRE MOUNTING HEIGHT "X"
20' , 22' , AND 24'	30'
26' , 28' AND 30'	35'
32' AND 34'	40'

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF OPERATIONS

STANDARD

TRAFFIC SIGNAL SUPPORT
FOUNDATION TYPE B

RECOMMENDED JAN 27, 2025




CHIEF, T&MO ARTERIALS AND PLANNING SECTION

RECOMMENDED JAN 27, 2025


CHIEF OF HIGHWAY SAFETY AND TRAFFIC OPERATIONS DIVISION

SHEET 8 OF 10

TC-8801

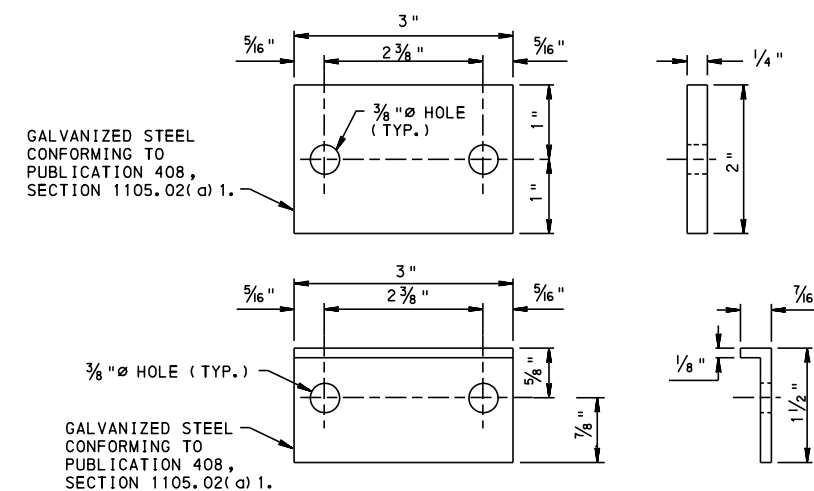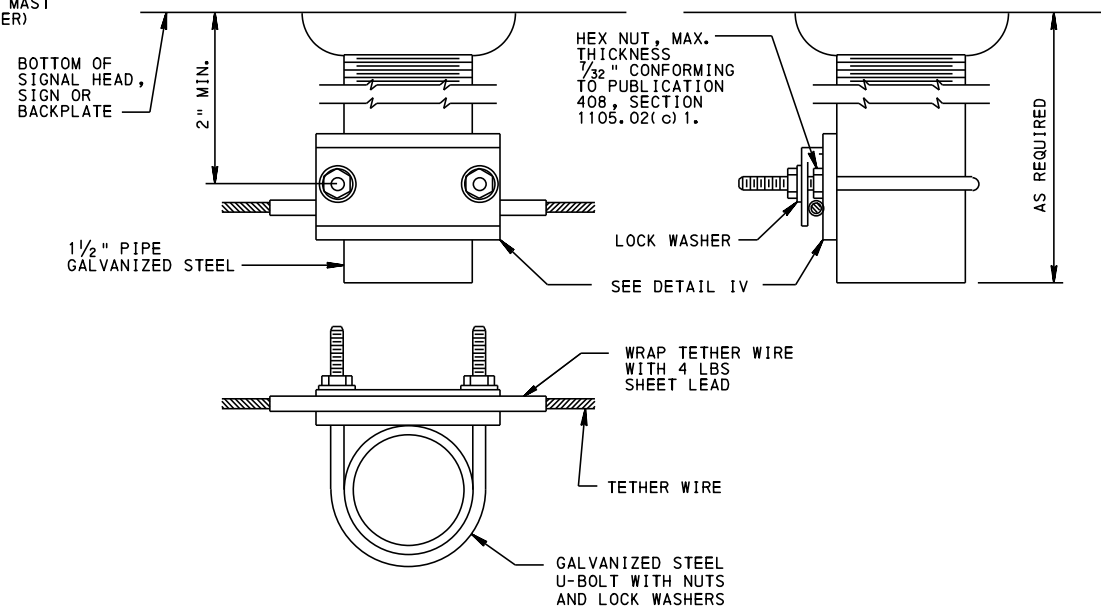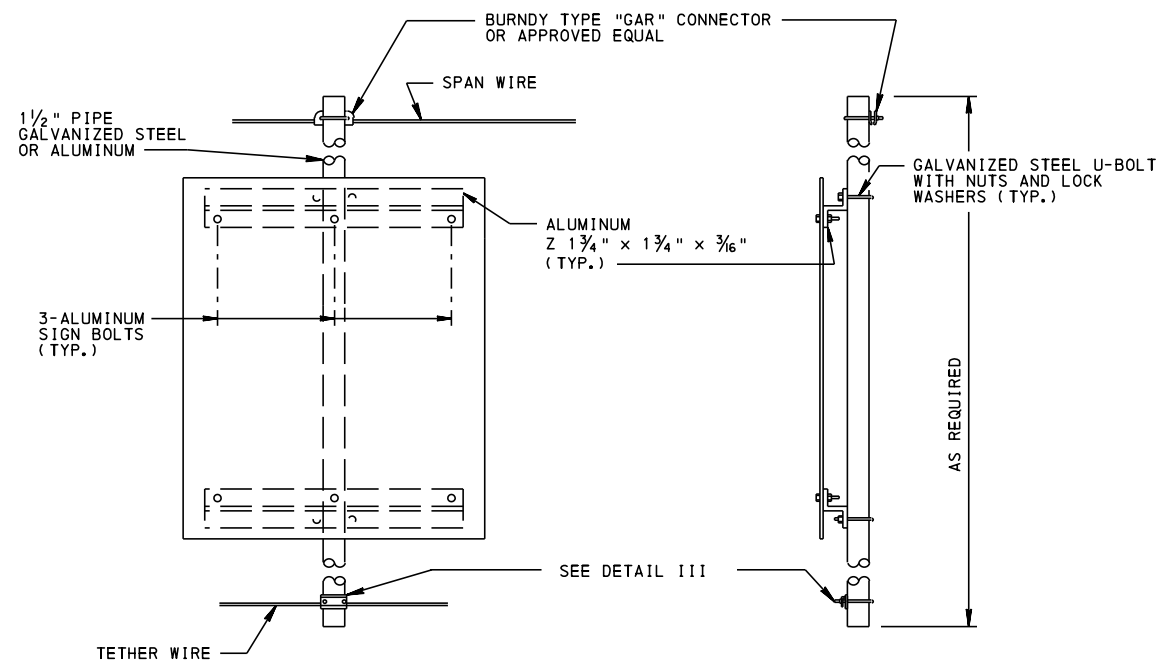

COMMONWEALTH OF PENNSYLVANIA DEPARTMENT OF TRANSPORTATION BUREAU OF OPERATIONS		
STANDARD TRAFFIC SIGNAL SUPPORT BRACKETS		
RECOMMENDED <u>JAN 27, 2025</u>  CHIEF, TSMO ARTERIALS AND PLANNING SECTION	RECOMMENDED <u>JAN 27, 2025</u>  CHIEF OF HIGHWAY SAFETY AND TRAFFIC OPERATIONS DIVISION	SHEET 9 OF 10 TC-8801

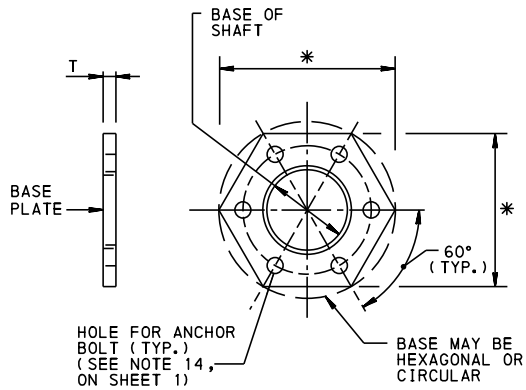


* AS REQUIRED TO MEET THE DEPARTMENT'S "CRITERIA FOR THE DESIGN OF TRAFFIC SIGNAL SUPPORTS", PUBLICATION 149.

BASE PLATE

NOTE: A MINIMUM OF 6 ANCHOR BOLTS IS REQUIRED FOR MAST ARM AND STRAIN POLE TRAFFIC SIGNAL SUPPORTS (SHOWN). 4 ANCHOR BOLTS ARE REQUIRED FOR PEDESTAL POLE TRAFFIC SIGNAL SUPPORTS.

BASE PLATE AND CONNECTION PLATE THICKNESS

SHAFT OR COLUMN CONNECTION DIAMETER (IN)	PLATE THICKNESS MINIMUM, "T" (IN)
LESS THAN 6"	1"
6" TO 13"	2"
GREATER THAN 13" BUT LESS THAN 19"	2½"
GREATER THAN OR EQUAL TO 19"	3"

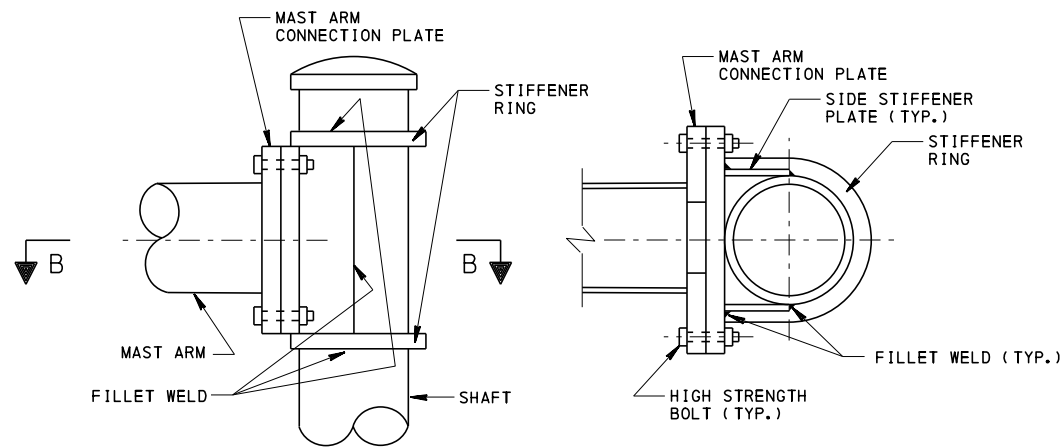


ELEVATION

SECTION B-B

MAST-ARM-TO-SHAFT CONNECTION DETAIL (RING-STIFFENED BUILT-UP BOX)


NOTE: SEAL ALL NON-WELDED JOINTS WITH SILICONE CAULK.

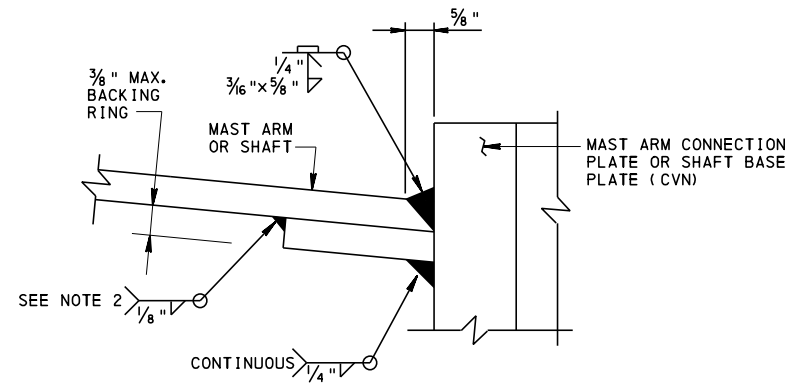

DETAIL B


(MAST ARM CONNECTION SHOWN, SHAFT CONNECTION TO BASE PLATE SIMILAR)

- BACKING RING MUST BE FITTED/SIZED TO THE MAST ARM OR SHAFT AND CONTINUOUSLY FILLET WELDED TO THE CONNECTION PLATE OR BASE PLATE BEFORE THE FULL PENETRATION GROOVE WELD IS MADE. BACKING RING MUST BE FABRICATED AS A CONTINUOUS RING.
- FOR MAST ARMS OR SHAFTS LESS THAN 18"Ø, THIS FILLET WELD IS NOT REQUIRED BUT SHOP IS TO APPLY SILICONE CAULKING TO THIS LOCATION AFTER POLE ASSEMBLY IS GALVANIZED.

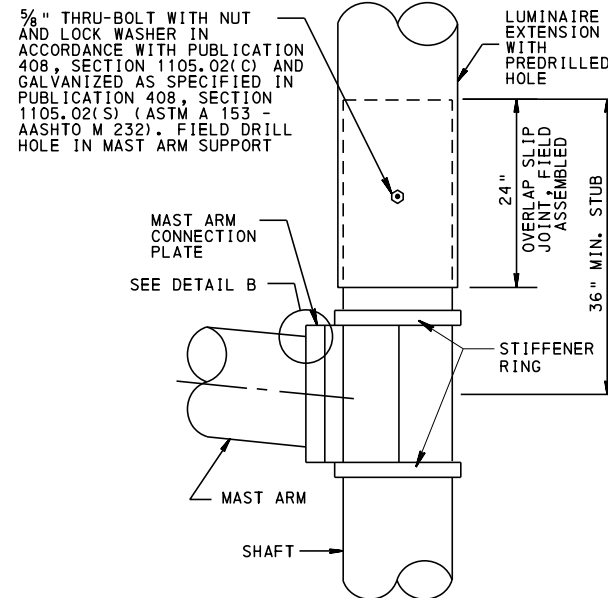


OVERLAP SLIP JOINT DETAIL

(ALTERNATE METHOD TO PROVIDE LUMINAIRE)
(SEE NOTES 11 AND 12 ON SHEET 1)

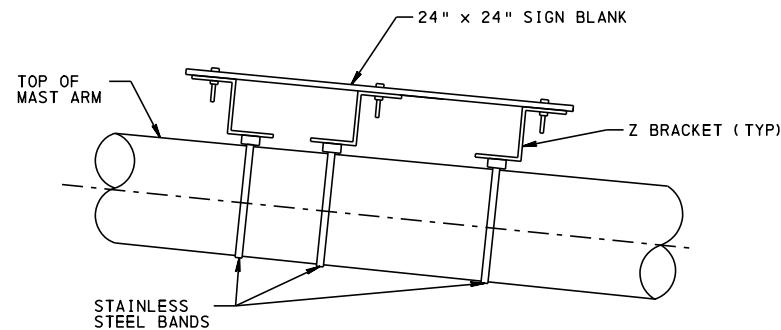


MITIGATION DEVICE DETAIL


NOTE: INSTALL MITIGATION DEVICE WITHIN 5' OF MAST ARM TIP WHEN REQUIRED.

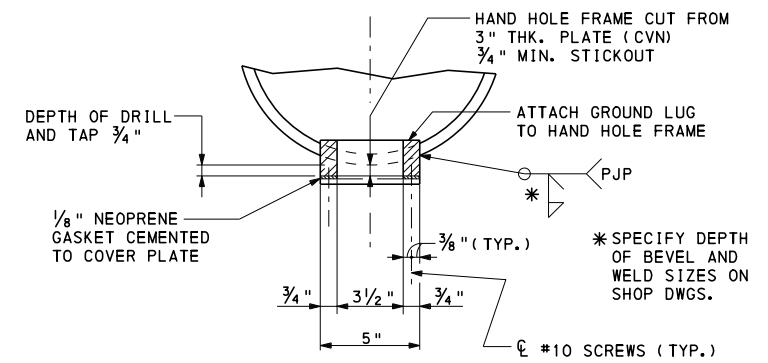

SECTION A-A

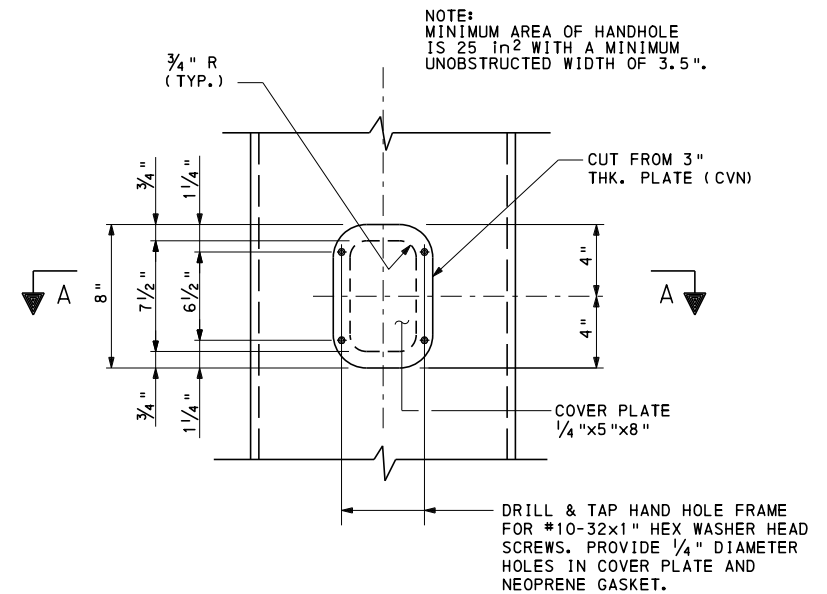

HAND HOLE DETAIL

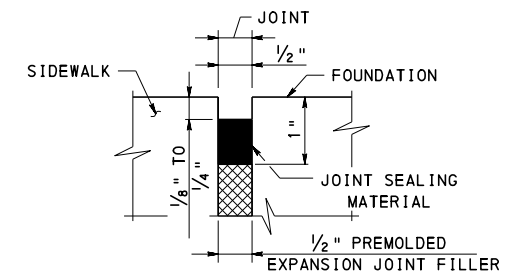

DETAIL C

COMMONWEALTH OF PENNSYLVANIA DEPARTMENT OF TRANSPORTATION BUREAU OF OPERATIONS

STANDARD



TRAFFIC SIGNAL SUPPORT MISCELLANEOUS DETAILS

RECOMMENDED JAN 27, 2025
CHIEF, T&MO ARTERIALS AND PLANNING SECTION





RECOMMENDED JAN 27, 2025
CHIEF OF HIGHWAY SAFETY AND TRAFFIC OPERATIONS DIVISION

SHEET 10 OF 10

TC-8801

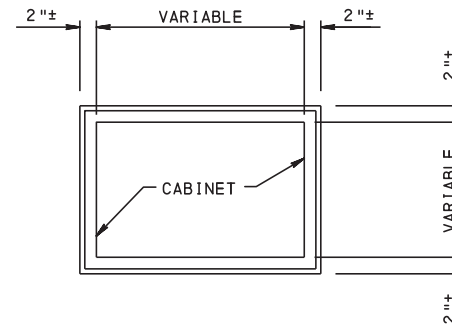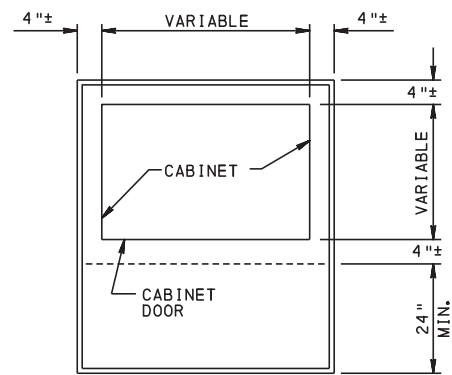

NOTE:
BASE-MOUNTED CONTROLLER ASSEMBLIES
LOCATED IN A PAVED SURFACE SHALL
HAVE THE ANCHOR BOLTS INSIDE THE
CABINET.

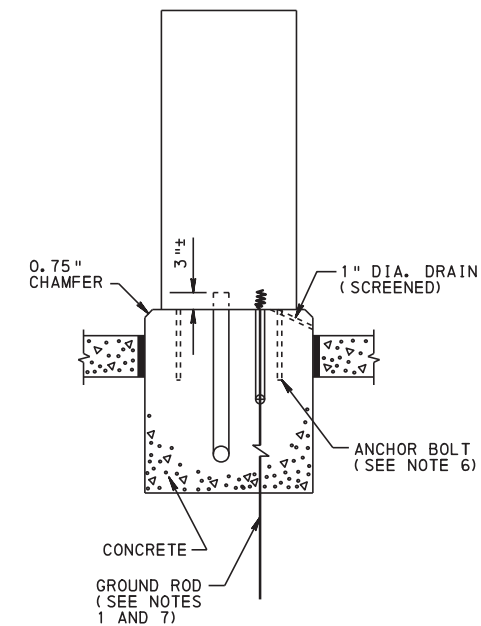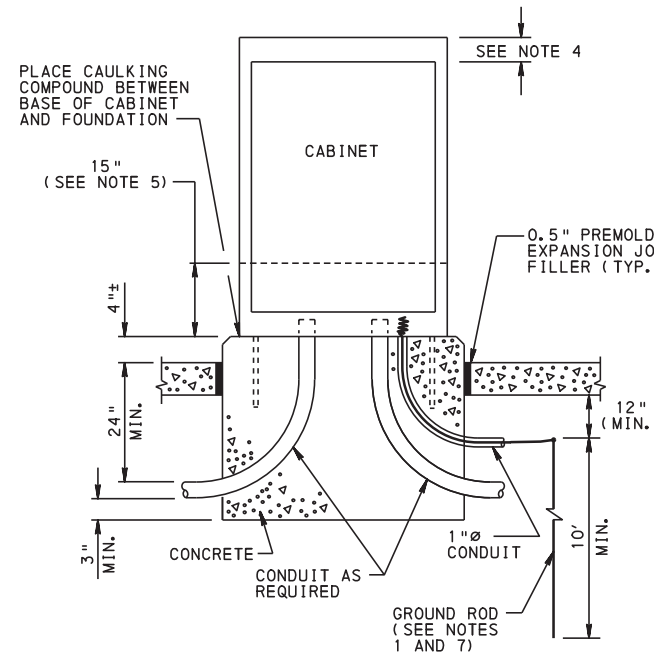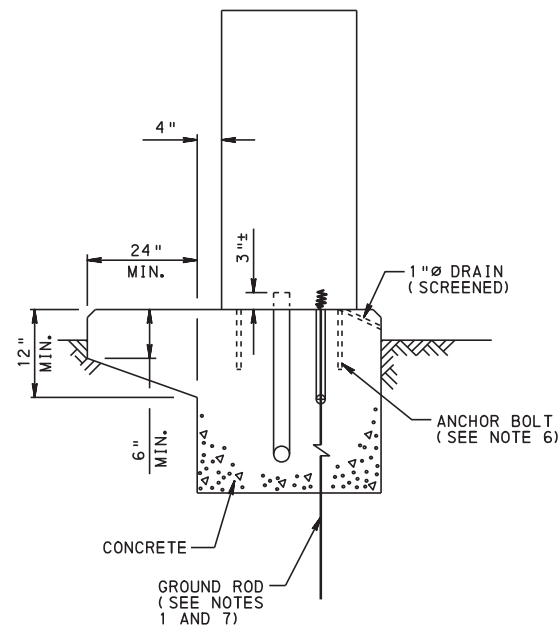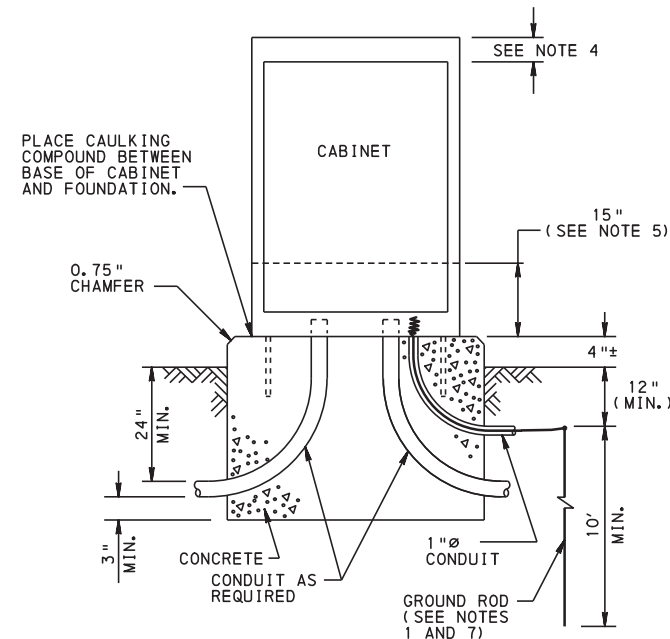


IN EARTH

IN PAVED SURFACE

CONTROLLER ASSEMBLY ON CEMENT CONCRETE FOUNDATION TYPE I MOUNTING

NOTE:

ANY HOLE LARGER THAN 1"Ø SHALL
BE REINFORCED AT THE FACTORY.

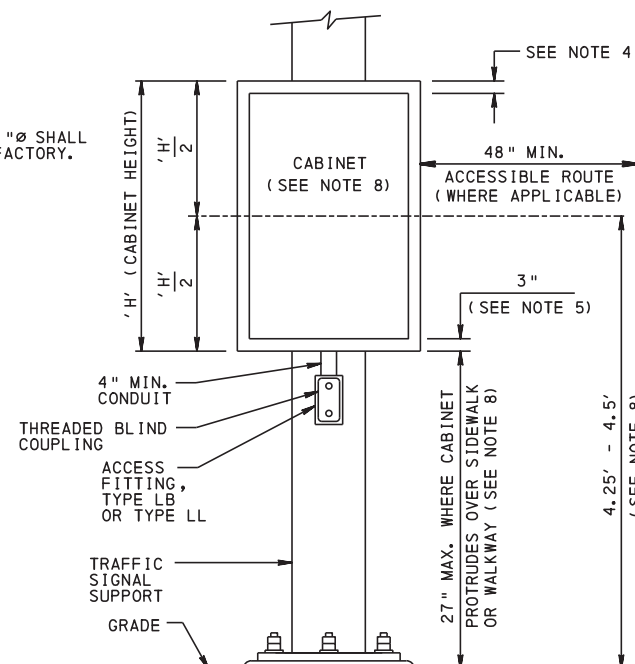

CONTROLLER ASSEMBLY ON TRAFFIC SIGNAL SUPPORT TYPE II MOUNTING

NOTES:

1. PROVIDE GROUND ROD AS SPECIFIED IN SECTION 1101.11(J) OF PUBLICATION 408.
2. ANCHOR BOLT, NUT AND WASHER SHALL BE GALVANIZED.
3. HARDWARE FOR ATTACHING CABINET TO TRAFFIC SIGNAL SUPPORT SHALL BE ALUMINUM, GALVANIZED STEEL, OR STAINLESS STEEL.
4. NO PORTION OF ANY EQUIPMENT, EXCEPT FAN, BETWEEN THE TOP OF DOOR OPENING AND TOP OF CABINET.
5. MINIMUM CLEARANCE BETWEEN BOTTOM OF CABINET AND TERMINALS, EQUIPMENT OR DEVICES.
6. ANCHOR BOLTS M12 x 1/2" x 12" OR DRILL CONCRETE TO RECEIVE 1/2" DIA x 3.75" LONG EXPANSION BOLT OR APPROVED EQUAL.
7. FOR GROUND ROD SIZE AND INSTALLATION DETAILS, SEE TC-8804.
8. MOUNT CABINET ON TRAFFIC SIGNAL SUPPORT IN A MANNER NOT TO PROTRUDE OVER EXISTING SIDEWALK. WHERE THIS IS NOT POSSIBLE, COMPLY WITH TYPE II MOUNTING DETAIL AND PUBLICATION 13M, CHAPTER 6.

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF OPERATIONS

STANDARD

CONTROLLER ASSEMBLY

RECOMMENDED JUN 20, 2023

CHIEF, TSMO ARTERIALS AND
PLANNING SECTION

RECOMMENDED JUN 20, 2023

CHIEF, HIGHWAY SAFETY AND
TRAFFIC OPERATIONS DIVISION

SHT. 1 OF 1

TC-8802

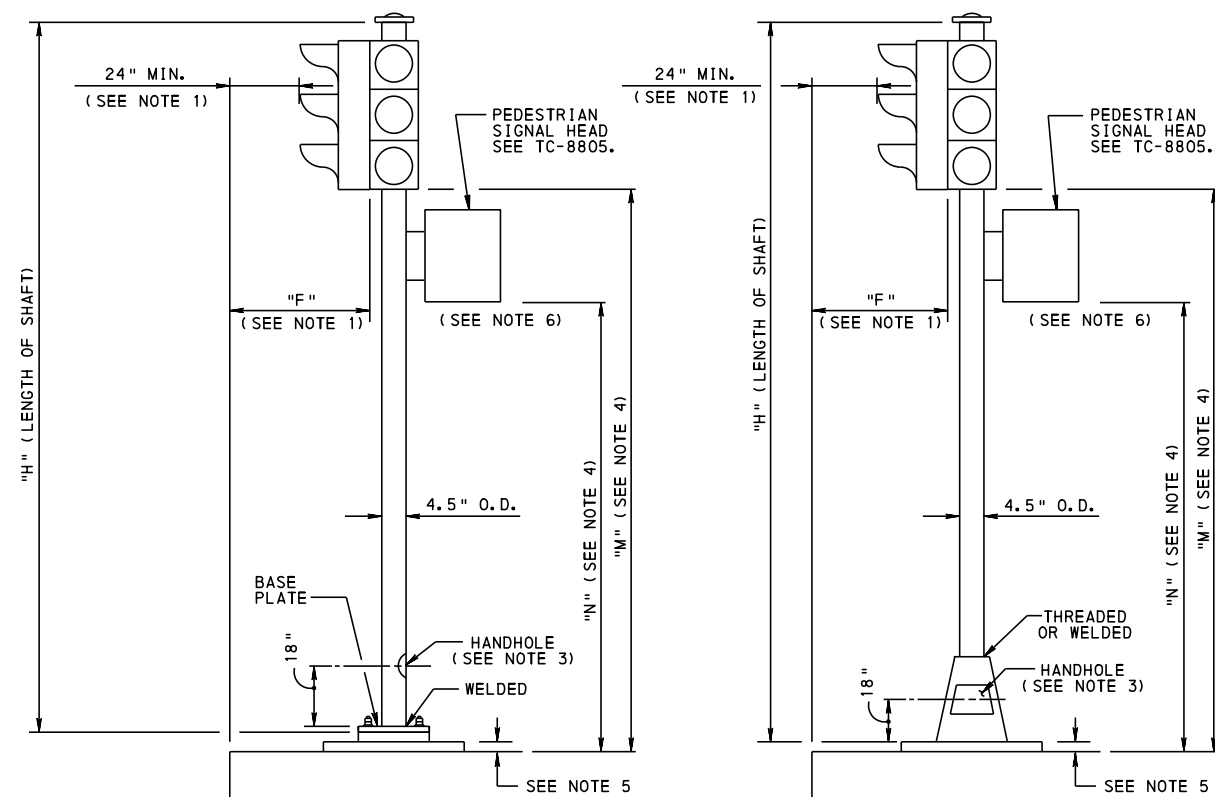




PLATE BASE

CAST BASE

TRAFFIC SIGNAL SUPPORT-PEDESTAL

NOTES:

1. PROVIDE 24" LATERAL MINIMUM CLEARANCE. IF THERE IS NO CURB, MINIMUM CLEARANCE IS MEASURED FROM THE EDGE OF SHOULDER.
2. FOR DETAIL OF PEDESTAL FOUNDATION, SEE TC-8801.
3. PROVIDE 3" x 5" HANDHOLE OPENING WITH A MINIMUM FRAME THICKNESS OF $\frac{3}{8}$ ".
4. DIMENSIONS "M" AND "N" ARE REFERENCED FROM TOP OF SIDEWALK. IF NO SIDEWALK IS PRESENT, DIMENSIONS ARE TO BE TAKEN FROM THE TOP OF PAVEMENT AT CENTER OF ROADWAY. PROVIDE DIMENSION "M" SUCH THAT VERTICAL CLEARANCE IS 8' MINIMUM TO 19' MAXIMUM FOR TRAFFIC SIGNAL HEADS. PROVIDE DIMENSION "N" SUCH THAT VERTICAL CLEARANCE IS 7' MINIMUM TO 10' MAXIMUM FOR PEDESTRIAN SIGNAL HEADS.
5. IN A PAVED AREA, PLACE THE TOP OF THE FOUNDATION FLUSH WITH THE SURFACE OF THE ADJACENT PAVEMENT. PROVIDE $\frac{1}{2}$ " PREMOLDED EXPANSION JOINT FILLER BETWEEN FOUNDATION AND ADJACENT PAVEMENT. SEE DETAIL C ON SHEET 10 OF TC-8801.
6. ALL ACCESSIBILITY FEATURES MUST BE COMPLIANT TO PENNDOT PUBLICATION 13M (DM-2), CHAPTER 6, PUBLICATION 72M (RC STANDARDS) CRITERIA AND PUBLICATION 149.
7. PEDESTRIAN PUSHBUTTONS SHALL BE OF A TYPE APPROVED BY THE DEPARTMENT AND LISTED IN PUBLICATION 35 (BULLETIN 15).
8. PEDESTRIAN PUSHBUTTONS SHALL BE A MINIMUM OF 2" DIAMETER AND A FORCE PER ACTUATION THAT CANNOT EXCEED 5 LBS.
9. PROVIDE 4'-0" x 4'-0" MINIMUM LANDING WITH 2.00% MAXIMUM SLOPE IN ALL DIRECTIONS WHERE PEDESTRIANS PERFORM 180° TURNING MANEUVERS.
10. FOR PEDESTRIAN PUSHBUTTON MOUNTING DETAILS, SEE SHEET 2.

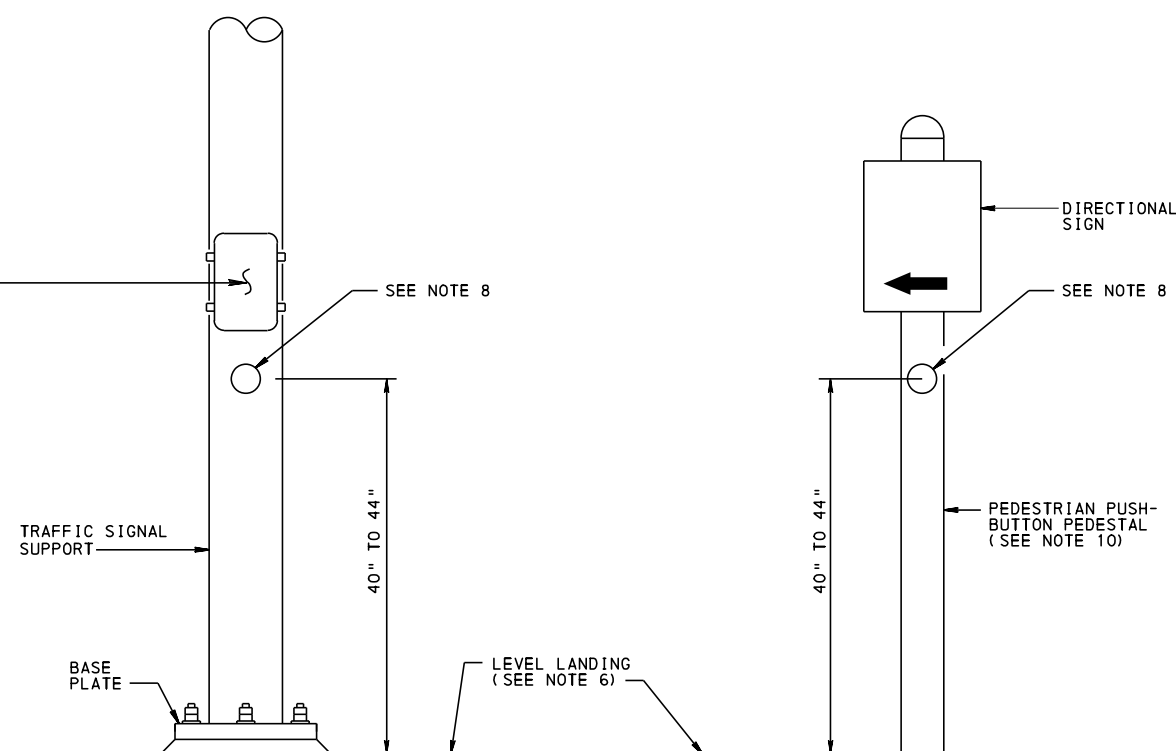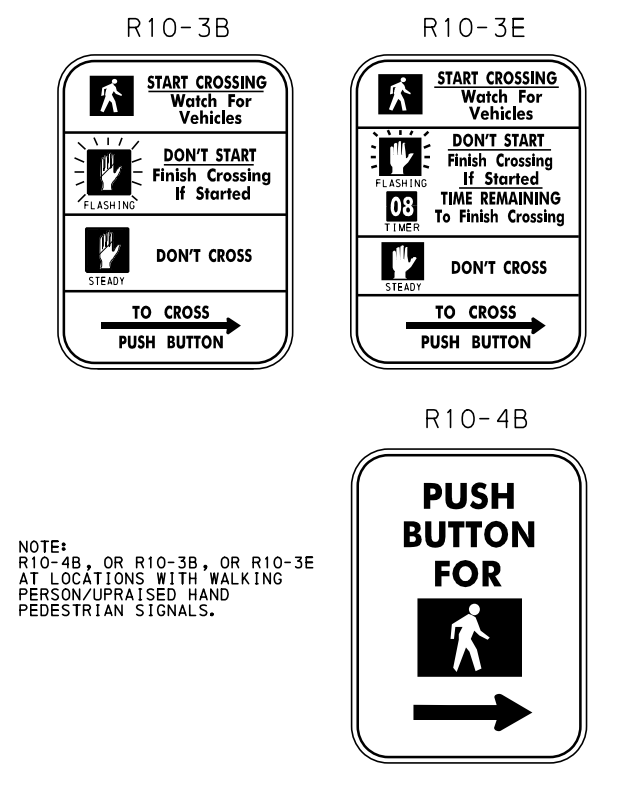

PEDESTRIAN PUSHBUTTON VERTICAL PLACEMENT

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF OPERATIONS

STANDARD

MISCELLANEOUS
TRAFFIC SIGNAL SUPPORT-PEDESTAL
PEDESTRIAN PUSHBUTTON



RECOMMENDED JAN 27, 2025
[Signature]
CHIEF, TSMO ARTERIALS AND
PLANNING SECTION

RECOMMENDED JAN 27, 2025
[Signature]
CHIEF, HIGHWAY SAFETY AND
TRAFFIC OPERATIONS DIVISION



SHT. 1 OF 4

TC-8803

TYPE A

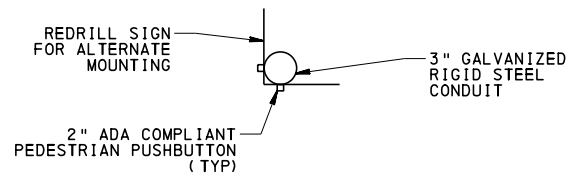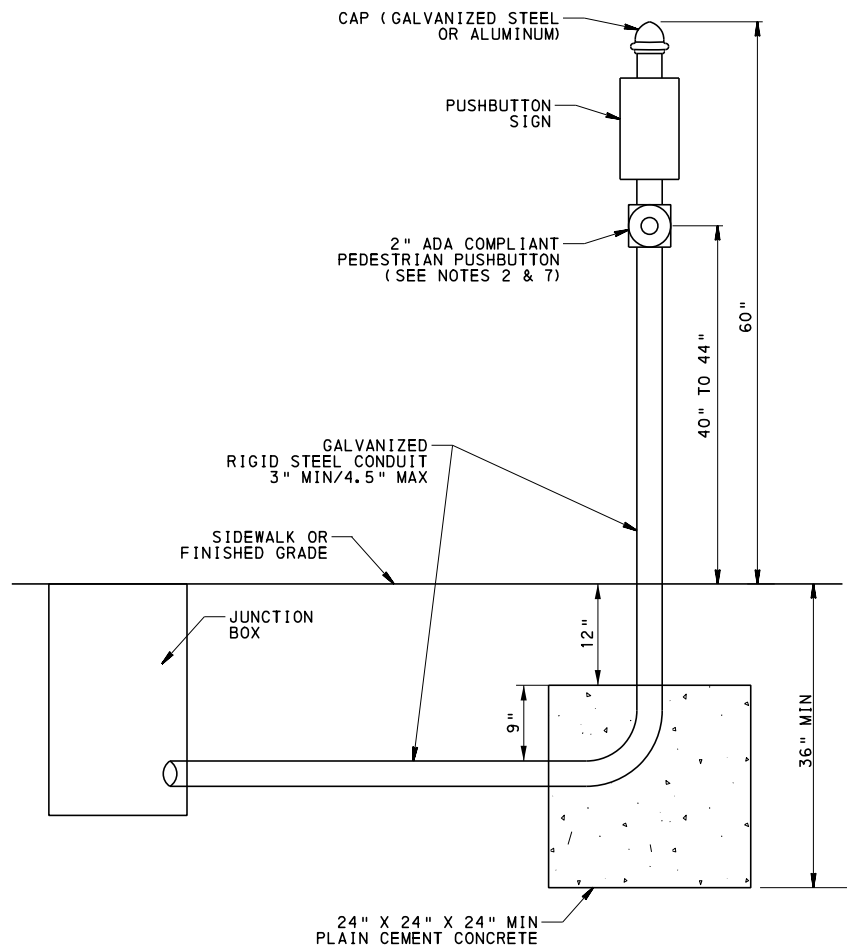


TYPE B

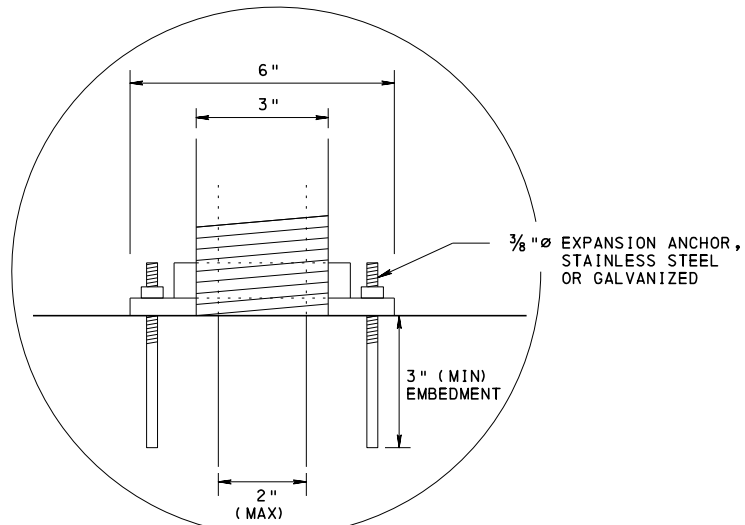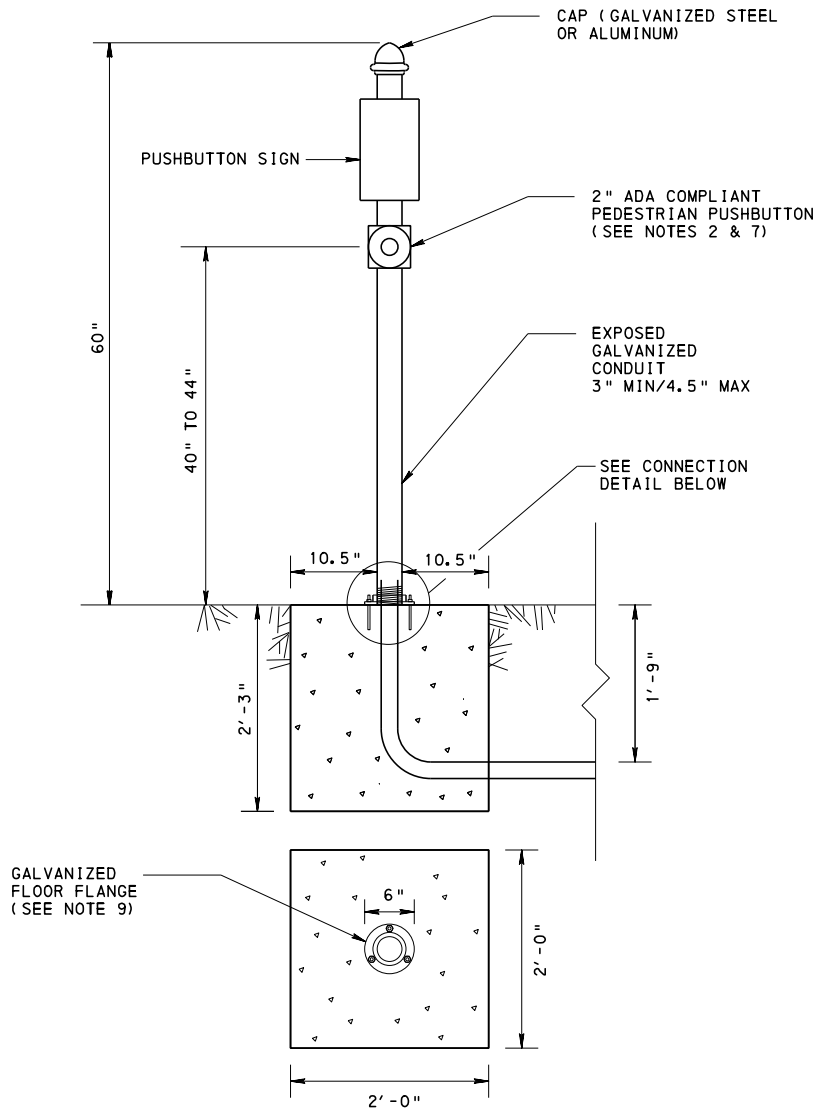

CONNECTION DETAIL

SEE NOTE 9

TYPE C

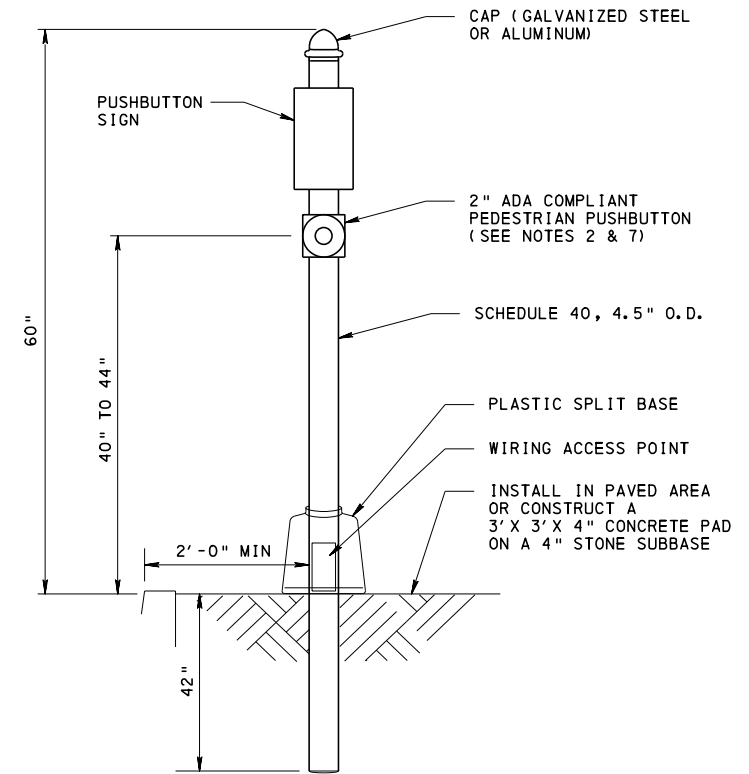

NOTES:

1. REFER TO RC-67M FOR CURB RAMP AND SIDEWALK DETAILS.
2. MOUNT PEDESTRIAN PUSHBUTTON BETWEEN 40" TO 44" ABOVE TOP OF SIDEWALK OR FINISHED GRADE TO THE EXPOSED CONDUIT AND LATERALLY 10" MAXIMUM FROM LEVEL LANDING.
3. ALL ACCESSIBILITY FEATURES MUST BE COMPLIANT TO PENNDOT PUBLICATION 13M (DM-2), CHAPTER 6, PUBLICATION 72M (RC STANDARDS) CRITERIA AND PUBLICATION 149.
4. IN A PAVED AREA, PLACE THE TOP OF THE FOUNDATION FLUSH WITH THE SURFACE OF THE ADJACENT PAVEMENT. PROVIDE 1/2" PREMOLDED EXPANSION JOINT FILLER BETWEEN FOUNDATION AND ADJACENT PAVEMENT. SEE DETAIL C ON SHEET 10 OF TC-8801.
5. PEDESTRIAN PUSHBUTTONS SHALL BE OF A TYPE APPROVED BY THE DEPARTMENT AND LISTED IN PUBLICATION 35 (BULLETIN 15).
6. PEDESTRIAN PUSHBUTTONS SHALL BE A MINIMUM OF 2" DIAMETER AND A FORCE PER ACTUATION THAT CANNOT EXCEED 5 LBS.
7. PEDESTRIAN PUSHBUTTON EXTENSION ARM TYPICALLY MEASURES UP TO 3". MAXIMUM LENGTH OF EXTENSION ARM TO BE 12". EXTENSION ARMS MEASURING GREATER THAN 12" REQUIRE DISTRICT APPROVAL PRIOR TO INSTALLATION.
8. INSTALL CONCRETE FOUNDATIONS IN ACCORDANCE WITH PUBLICATION 408 SECTION 951.2(b) AND 951.3(b).
9. USE AN APPROPRIATELY SIZED FLANGE TO CORRESPOND WITH THE POLE SIZE THAT IS SELECTED. CONNECTION DETAIL CORRESPONDS TO 3" POLE.
10. FOR TYPE A AND B FOUNDATIONS, CONDUIT INSTALLATION IN CONCRETE BLOCKS SHALL BE CENTERED AND AS SPECIFIED IN DIMENSIONS.

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF OPERATIONS

STANDARD

MISCELLANEOUS
PEDESTRIAN PUSHBUTTON
MOUNTING DETAILS

RECOMMENDED JAN 27, 2025

CHIEF, TRMO ARTERIALS AND
PLANNING SECTION



RECOMMENDED JAN 27, 2025

CHIEF, HIGHWAY SAFETY AND
TRAFFIC OPERATIONS DIVISION


SHT. 2 OF 4

TC-8803

PEDESTRIAN PUSHBUTTON MOUNTING DETAILS

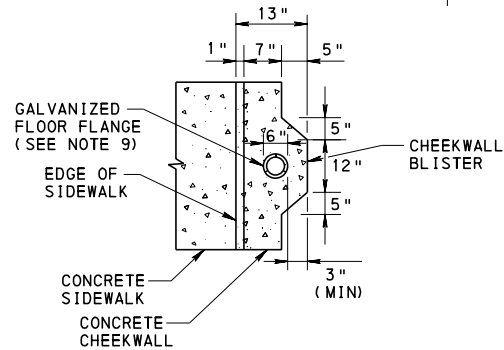

PEDESTRIAN PUSHBUTTON MOUNTING DETAILS




1. REFER TO RC-67M FOR CURB RAMP AND SIDEWALK DETAILS.
2. MOUNT PEDESTRIAN PUSHBUTTON BETWEEN 40" TO 44" ABOVE SIDEWALK OR FINISHED GRADE TO THE CENTER OF THE PUSHBUTTON AND 10" MAX LATERALLY FROM LANDING.
3. ALL ACCESSIBILITY FEATURES MUST BE COMPLIANT TO PENNDOT PUBLICATION 13M (DM-2), CHAPTER 6, PUBLICATION 72M (RC STANDARDS) CRITERIA AND PUBLICATION 149.
4. IN A PAVED AREA, PLACE THE TOP OF THE FOUNDATION FLUSH WITH THE SURFACE OF THE ADJACENT PAVEMENT. PROVIDE 1/2" PREMOLED EXPANSION JOINT FILLER BETWEEN FOUNDATION AND ADJACENT PAVEMENT. SEE DETAIL C ON SHEET 10 OF TC-8801.
5. PEDESTRIAN PUSHBUTTONS SHALL BE OF A TYPE APPROVED BY THE DEPARTMENT AND LISTED IN PUBLICATION 35 (BULLETIN 15).
6. PEDESTRIAN PUSHBUTTONS SHALL BE A MINIMUM OF 2" DIAMETER AND A FORCE PER ACTUATION THAT CANNOT EXCEED 5 LBS.
7. PEDESTRIAN PUSHBUTTON EXTENSION ARM IS TYPICALLY UP TO 3". MAXIMUM EXTENSION ARM OF 12". EXTENSION ARMS GREATER THAN 12" REQUIRE DISTRICT APPROVAL PRIOR TO INSTALLATION.
8. INSTALL CONCRETE FOUNDATIONS IN ACCORDANCE WITH PUBLICATION 408 SECTION 951.2(b) AND 951.3(b).
9. USE AN APPROPRIATELY SIZED FLANGE TO CORRESPOND WITH THE POLE SIZE THAT IS SELECTED. VIEW A-A DETAIL CORRESPONDS TO 3" POLE.

MISCELLANEOUS
PEDESTRIAN PUSHBUTTON
MOUNTING DETAILS


CHIEF, TSMO ARTERIALS AND
PLANNING SECTION

CHIEF, HIGHWAY SAFETY AND
TRAFFIC OPERATIONS DIVISION


TC-8803

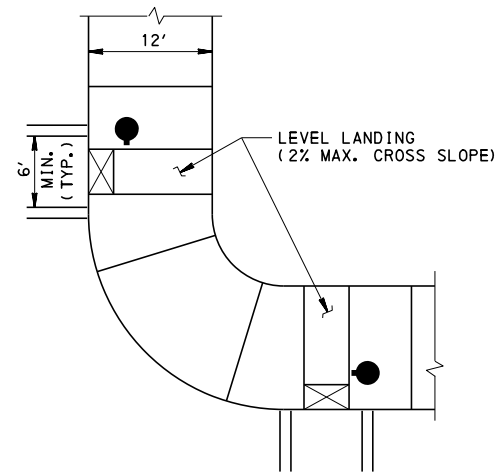


PARALLEL RAMPS WITH
WIDE SIDEWALK

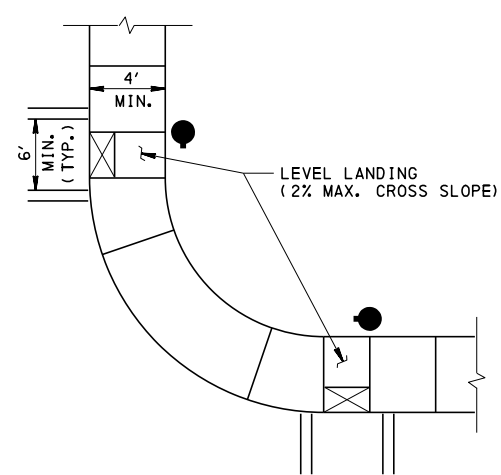

PARALLEL RAMPS WITH
NARROW SIDEWALK

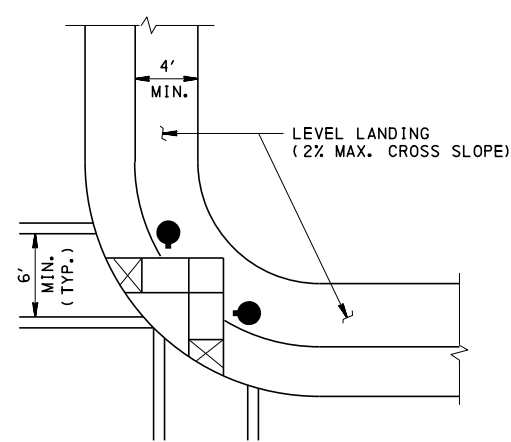


PERPENDICULAR RAMPS WITH
SIDEWALK SET BACK FROM ROAD
WITH CROSSWALKS CLOSE TOGETHER

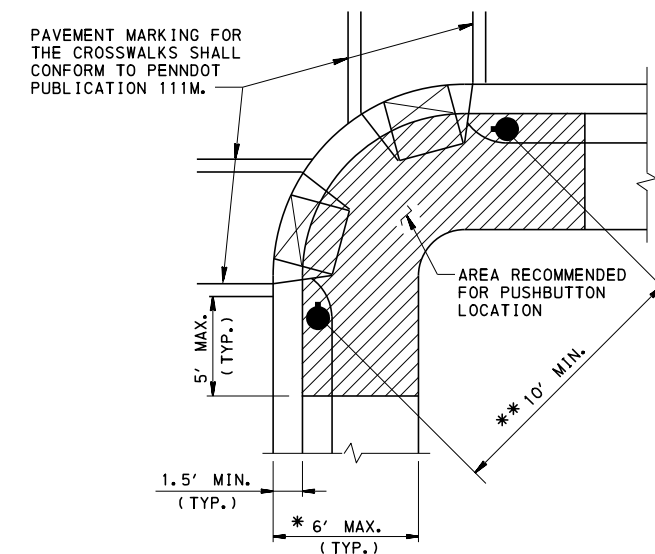


RECOMMENDED PUSHBUTTON LOCATIONS

* WHERE THERE ARE CONSTRAINTS THAT MAKE IT IMPRACTICAL TO PLACE THE PEDESTRIAN PUSHBUTTON BETWEEN 1.5' AND 6' FROM THE EDGE OF THE CURB, SHOULDER, OR PAVEMENT, IT SHOULD NOT BE FURTHER THAN 10' FROM THE EDGE OF CURB, SHOULDER, OR PAVEMENT.


** WHERE THERE ARE CONSTRAINTS ON A PARTICULAR CORNER THAT MAKE IT IMPRACTICAL TO PROVIDE 10' SEPARATION BETWEEN THE TWO PEDESTRIAN PUSHBUTTONS, THE PUSHBUTTONS MAY BE PLACED CLOSER TOGETHER OR ON THE SAME POLE.

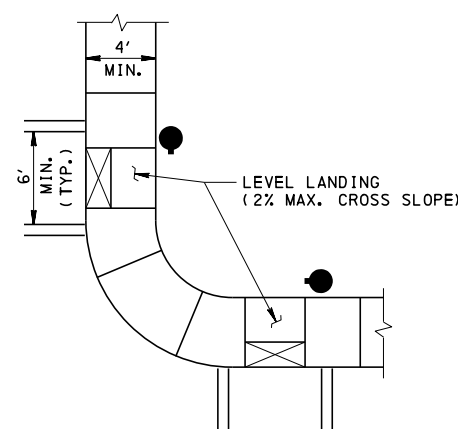

PARALLEL RAMPS WITH NARROW SIDEWALK
AND TIGHT CORNER RADIUS

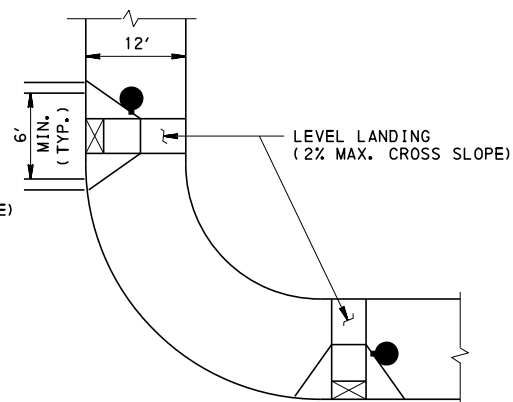


PERPENDICULAR RAMPS WITH
CROSSWALKS FAR APART

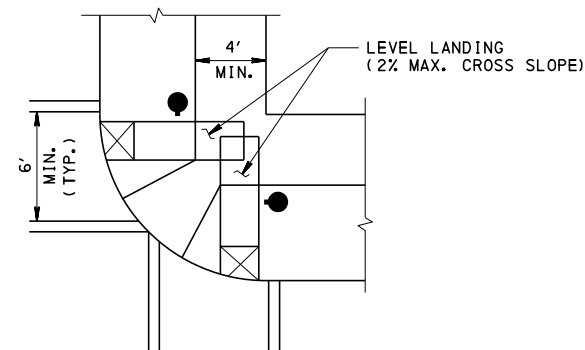


PERPENDICULAR RAMPS WITH
SIDEWALK SET BACK FROM ROAD WITH
CONTINUOUS SIDEWALK BETWEEN RAMPS

LEGEND


- - PEDESTRIAN PUSHBUTTON
- - DETECTABLE WARNING SURFACE

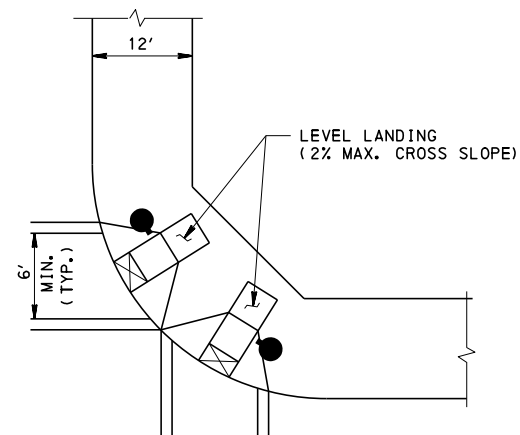

PERPENDICULAR RAMPS WITH
CROSSWALKS CLOSE TOGETHER

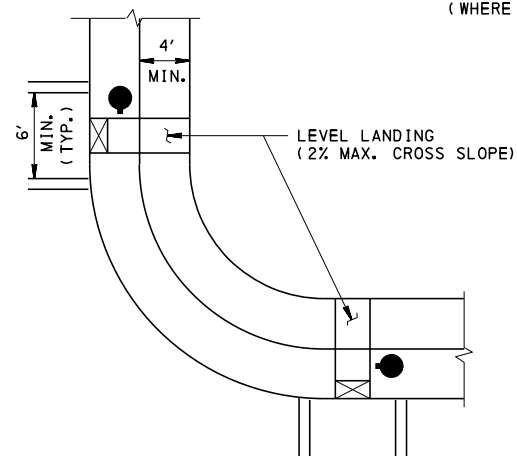

PERPENDICULAR RAMPS WITH
SIDEWALK SET BACK FROM ROAD WITH
CROSSWALKS FAR APART

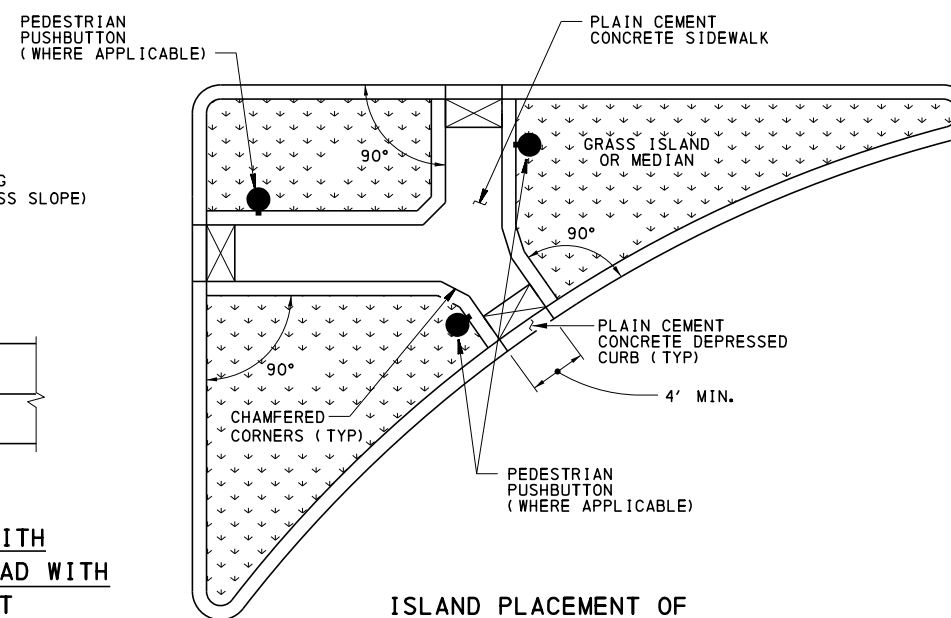

ISLAND PLACEMENT OF
PEDESTRIAN PUSHBUTTONS

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF OPERATIONS

STANDARD


MISCELLANEOUS
TYPICAL PEDESTRIAN PUSHBUTTON
LOCATIONS

RECOMMENDED JAN 27, 2025
CHIEF, TSMO ARTERIALS AND
PLANNING SECTION


RECOMMENDED JAN 27, 2025
CHIEF, HIGHWAY SAFETY AND
TRAFFIC OPERATIONS DIVISION

SHT. 4 OF 4


TC-8803

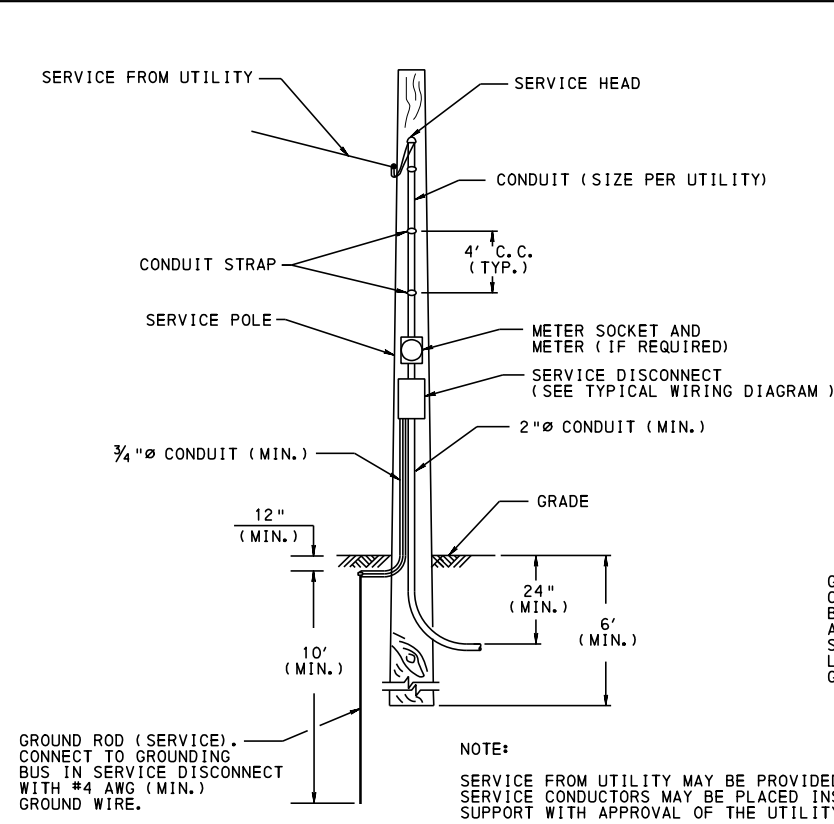


SERVICE TYPE A

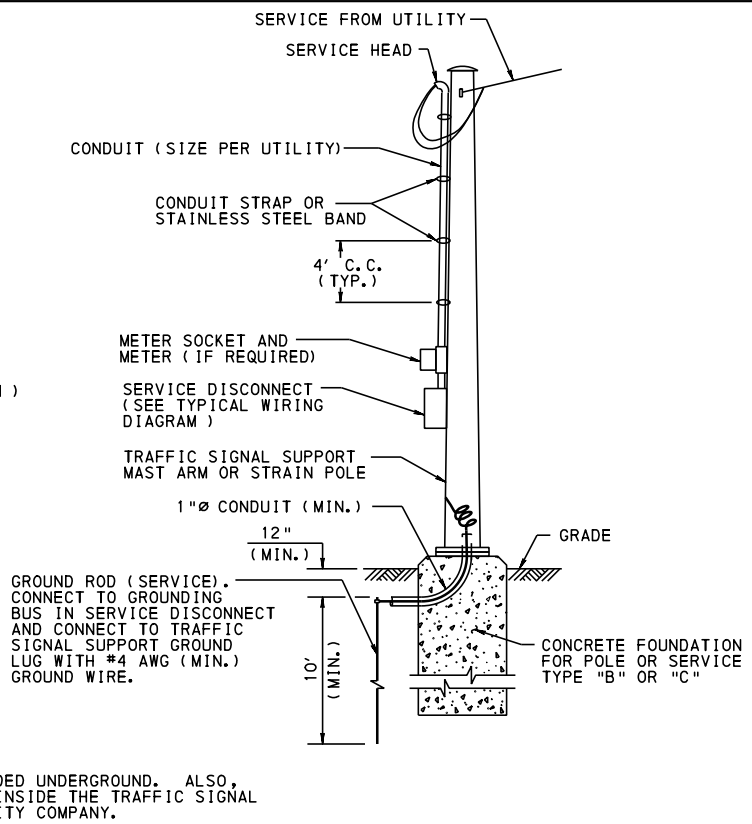


SERVICE TYPE B

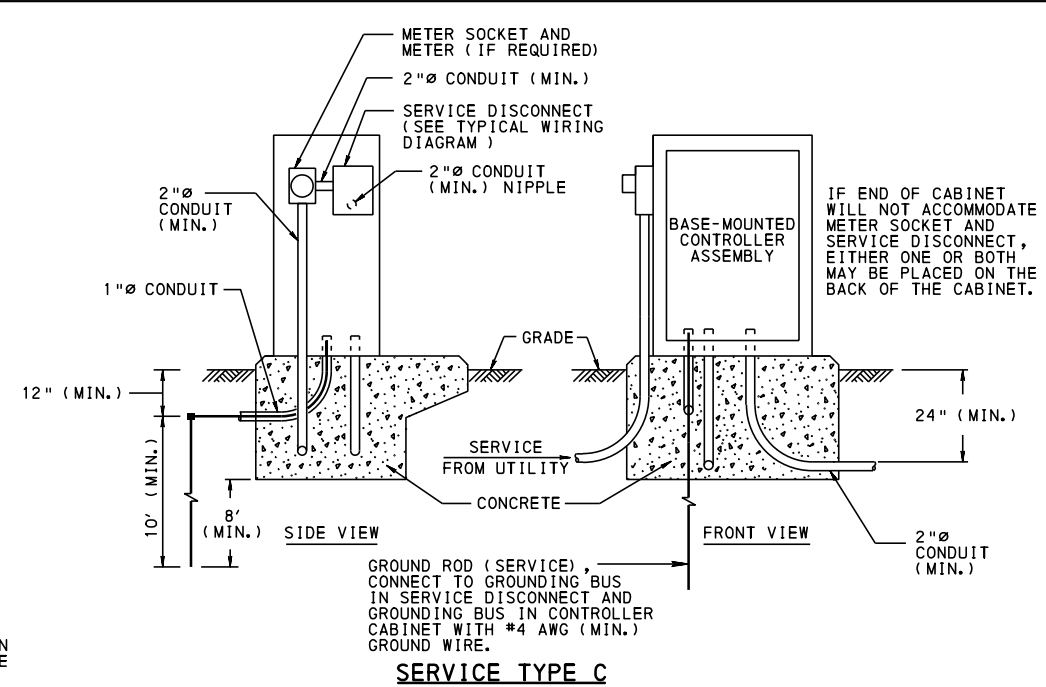


SERVICE TYPE C

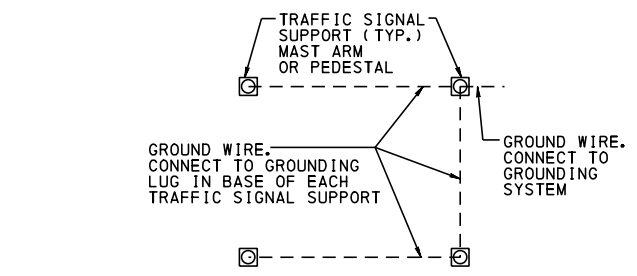


MAST ARM OR PEDESTAL SUPPORT

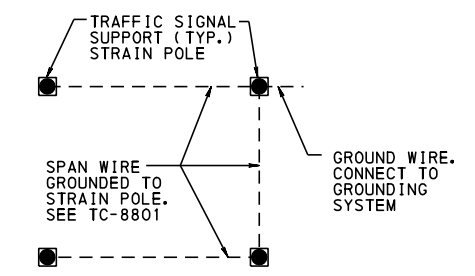

STRAIN POLE SUPPORT

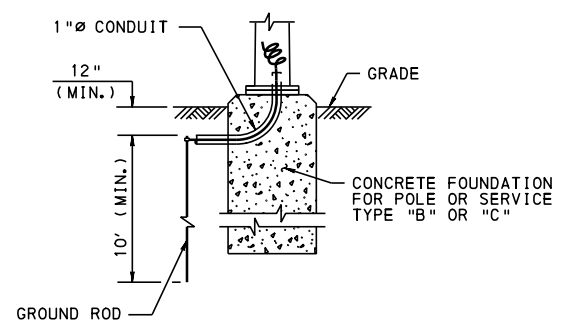


DETAIL "Z"

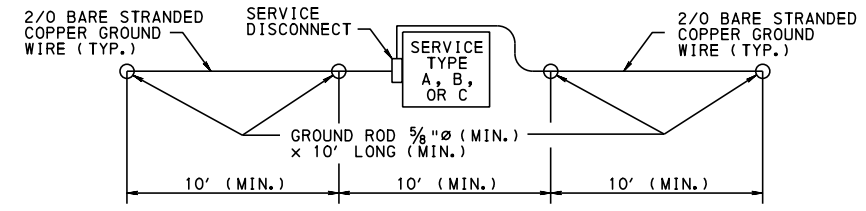


SERVICE GROUNDING ELECTRODE SYSTEM

- NOTE:**
1. FOR DETAIL OF TRAFFIC SIGNAL SUPPORT FOUNDATION, SEE TC-8801.
 2. FOR DETAIL OF CONTROLLER ASSEMBLY FOUNDATION, SEE TC-8802.
 3. ALL GROUND RODS ARE 5/8" DIA. (MIN.) x 10' LONG (MIN.). USE EXOTHERMIC WELD OR BRONZE CONNECTOR TO CONNECT GROUND WIRE TO GROUND ROD.
 4. INSTALL SERVICE TYPES A, B OR C AS APPROVED BY THE UTILITY COMPANY.
 5. PROVIDE ALL SERVICE CONDUITS OF THE MATERIAL APPROVED BY THE UTILITY AND ENSURE WATERTIGHT.
 6. REFER TO UTILITY'S SERVICE DETAIL WHEN UNMETERED LIGHTING IS INSTALLED ON TRAFFIC POLES. A SEPARATE DISCONNECT MAY BE REQUIRED.
 7. PROVIDE THE SERVICE DISCONNECT INSIDE AN OPTIONAL ALUMINUM ENCLOSURE, WHERE INDICATED.
 8. PROVIDE ADDITIONAL BREAKERS AS REQUIRED FOR LIGHTING LOADS.

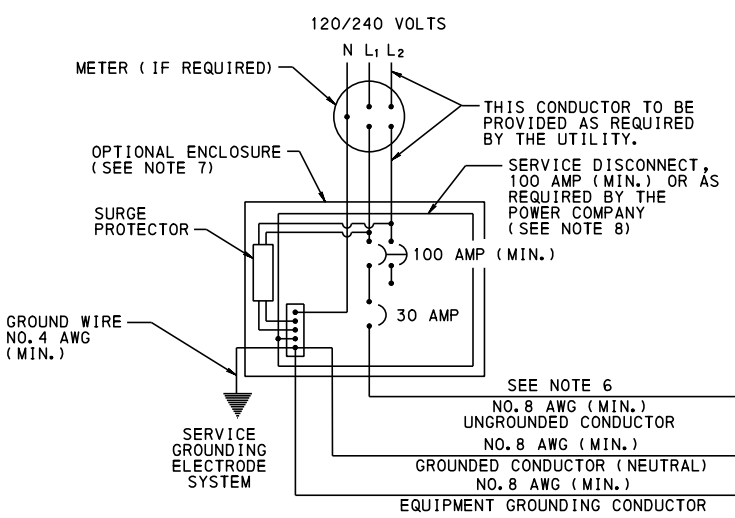

NOTE:
INSTALL GROUND RODS UNTIL IMPEDANCE IS LESS THAN 25 Ω

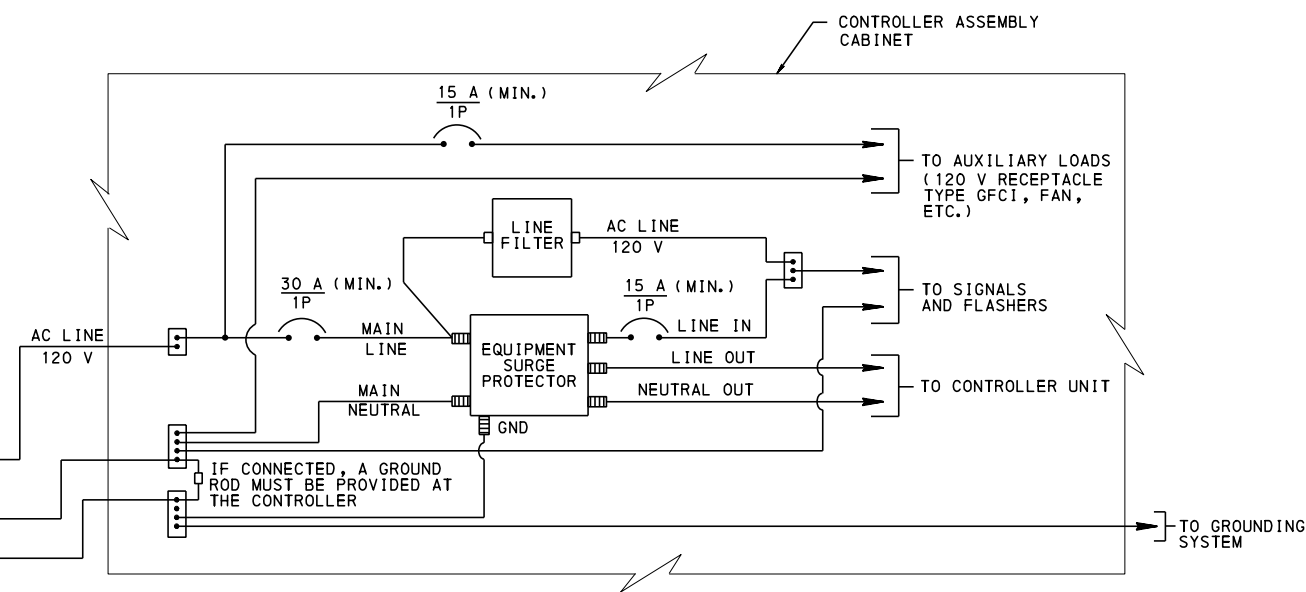

TYPICAL WIRING DIAGRAM

COMMONWEALTH OF PENNSYLVANIA DEPARTMENT OF TRANSPORTATION BUREAU OF OPERATIONS		
STANDARD		
ELECTRICAL DISTRIBUTION		
RECOMMENDED JAN 27, 2025 <i>[Signature]</i> CHIEF, TSMO ARTERIALS AND PLANNING SECTION	RECOMMENDED JAN 27, 2025 <i>[Signature]</i> CHIEF, HIGHWAY SAFETY AND TRAFFIC OPERATIONS DIVISION	SHT. 1 OF 2 TC-8804

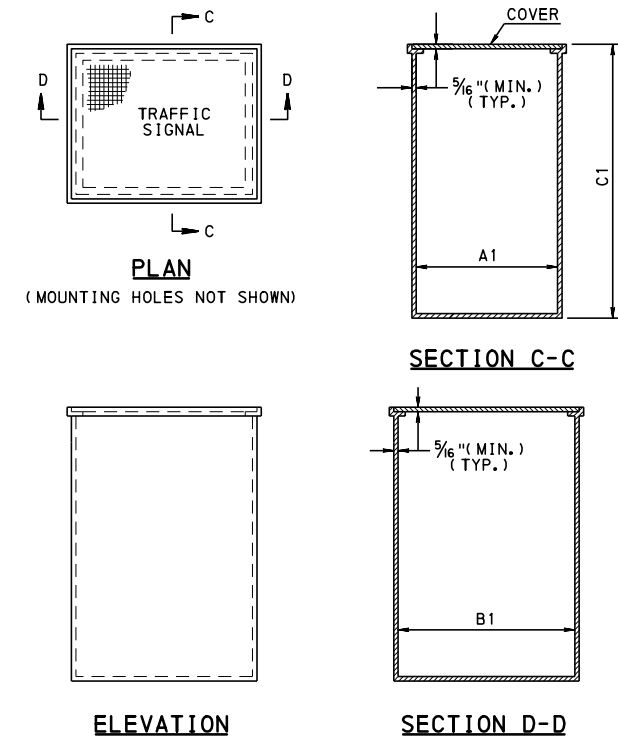


TABLE OF DIMENSIONS FOR CAST IRON OR STEEL JUNCTION BOX		
	JB-26	JB-27
A1	12" MIN	12" MIN
B1	12" MIN	18" MIN
C1	12" MIN	24" MIN

**CAST IRON OR STEEL
JUNCTION BOX, TYPE JB-26
OR TYPE JB-27**



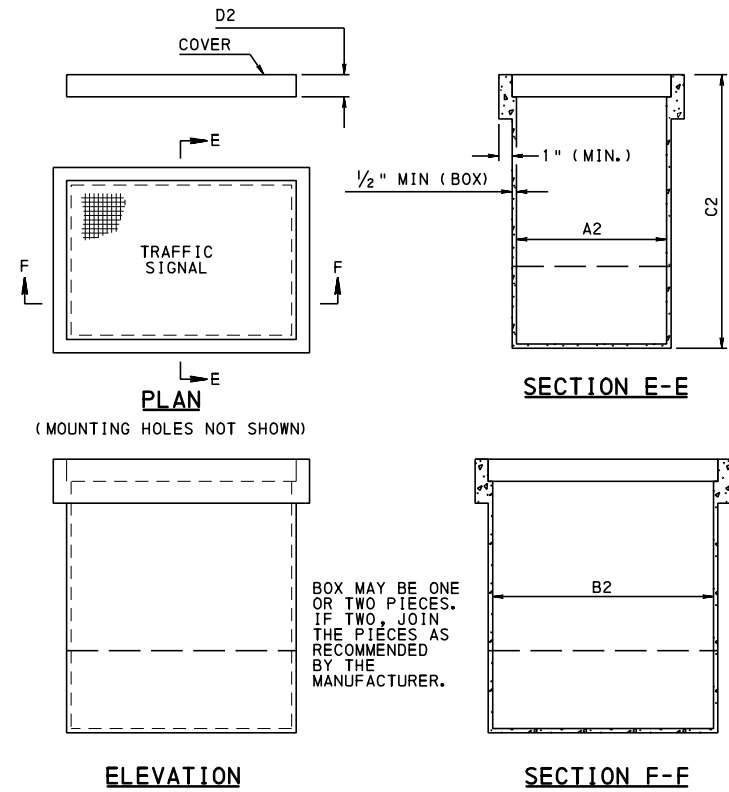


TABLE OF DIMENSIONS FOR REINFORCED PLASTIC MORTAR OR HIGH-DENSITY POLYMER CONCRETE			
	JB-26	JB-27	JB-30
A2	11 1/2" MIN	12" MIN	15 1/2" MIN
B2	11 1/2" MIN	18" MIN	28 1/2" MIN
C2	12" MIN	24" MIN	24" MIN
D2	3/4" MIN	3/4" MIN	2"

**REINFORCED PLASTIC MORTAR OR
HIGH-DENSITY POLYMER CONCRETE
JUNCTION BOX, TYPE JB-26
TYPE JB-27 OR TYPE JB-30**

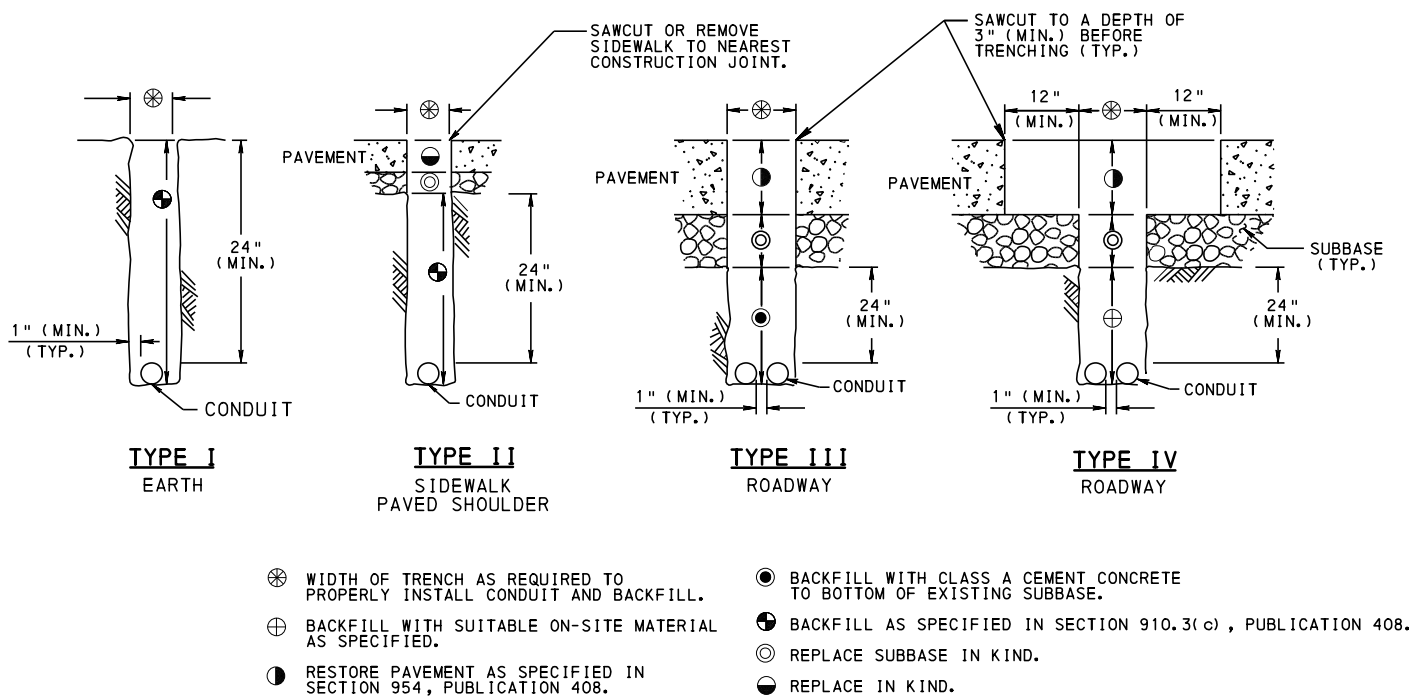


TRENCH AND BACKFILL

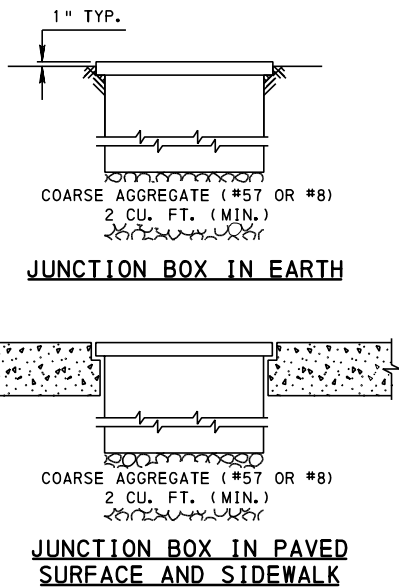

**TYPICAL JUNCTION BOX
INSTALLATION**

NOTES:

- JUNCTION BOXES -- PROVIDE COVER WITH A NON-SLIP SURFACE AND A MINIMUM OF TWO CORROSION RESISTANT FASTENERS.
- JUNCTION BOXES -- USE JB-26, JB-27 AND JB-30 ONLY IN AREAS NOT SUBJECT TO VEHICULAR TRAFFIC.
- JUNCTION BOXES -- BOTTOM MAY BE OPEN OR CLOSED. IF CLOSED, PROVIDE A DRAIN HOLE 2" DIAMETER MINIMUM.
- FOR DETAIL OF JUNCTION BOXES JB-1, JB-2, JB-11 AND JB-12, SEE STANDARD DRAWINGS, RC-81M AND RC-82M OF PENNDOT PUB. 72M.
- GROUND EXPOSED METAL PARTS OF JUNCTION BOXES. USE GROUNDING LUGS. DO NOT CONNECT GROUND WIRE DIRECTLY TO LID.

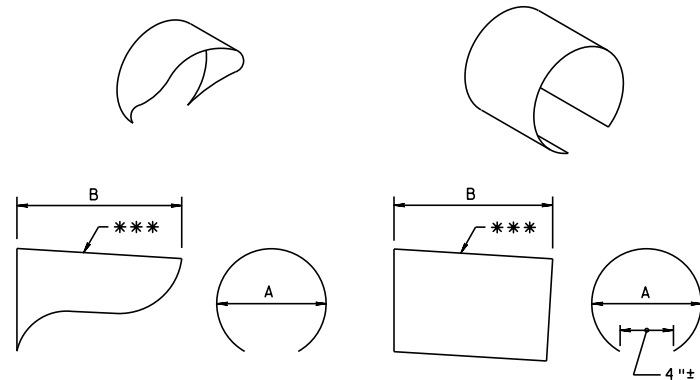


CUT-AWAY VISOR TUNNEL VISOR


VISOR DIMENSION TABLE	
A	B
8"	7" MIN
12"	9.5" MIN

*** THE VISOR SHALL HAVE A DOWNWARD TILT OF AT LEAST 3°.
CUT-AWAY VISORS SHALL BE USED FOR ALL SIGNAL FACES, UNLESS OTHERWISE INDICATED ON THE APPROVED PLAN.


VISOR TYPES FOR VEHICULAR SIGNAL HEAD

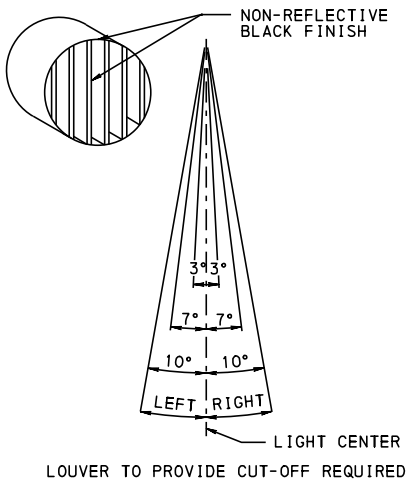


LOUVER FOR VEHICULAR SIGNAL HEAD
(DO NOT USE WITH CUT-AWAY VISOR)



CUT-AWAY VISOR




TUNNEL VISOR




LOUVER VISOR
(FOR PEDESTRIAN SIGNAL HEAD ONLY)


VISOR TYPES FOR PEDESTRIAN SIGNAL HEAD AND LANE-USE TRAFFIC CONTROL SIGNAL HEAD

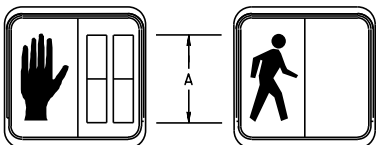

ONE-SECTION




ONE-SECTION

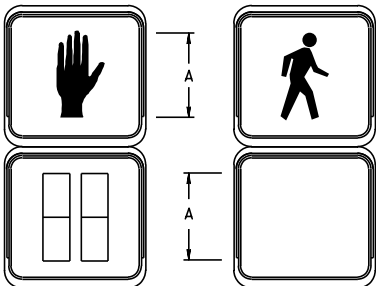

TWO-SECTIONS

TYPE A

(COUNTDOWN) *

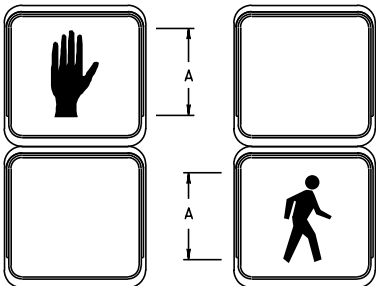

TWO-SECTIONS

TYPE B


(SYMBOL) **

TYPE	DIMENSION A
A	6" *
B	6" **

* COUNTDOWN PEDESTRIAN SIGNALS SHALL CONSIST OF PORTLAND ORANGE NUMBERS THAT ARE AT LEAST 6" IN HEIGHT. FOR CROSSWALKS WHERE THE PEDESTRIAN ENTERS THE CROSSWALK MORE THAN 100' FROM THE COUNTDOWN PEDESTRIAN SIGNAL DISPLAY, THE NUMBERS SHOULD BE AT LEAST 9" IN HEIGHT.

** FOR CROSSWALKS WHERE THE PEDESTRIAN ENTERS THE CROSSWALK MORE THAN 100' FROM THE PEDESTRIAN SIGNAL HEAD INDICATIONS, DIMENSION "A" SHOULD BE AT LEAST 9" HIGH.

PEDESTRIAN SIGNAL HEAD

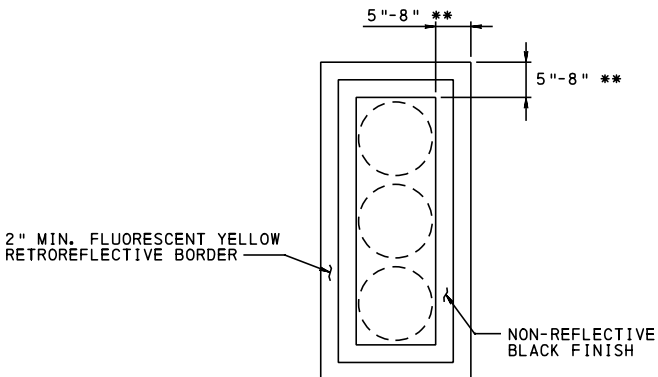


BACKPLATE FOR VEHICULAR SIGNAL HEAD *


* BACKPLATE CONFORMING TO PUBLICATION 408 SECTION 955.2(B) 3 SHALL BE ONE PIECE ALUMINUM
** 5" BORDER TO BE USED FOR 12" SIGNAL LENSES.
8" BORDER TO BE USED FOR 8" SIGNAL LENSES.

NOTE:

1. PEDESTRIAN SIGNALS MAY INCLUDE A COUNTDOWN TIMER THAT OPERATES DURING THE "FLASHING UPRaised HAND" PHASE.



ONE-SECTION

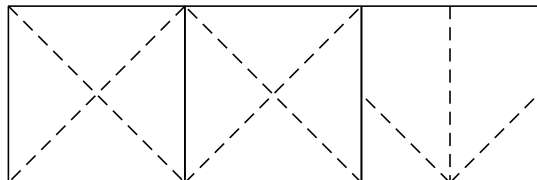

TWO OR THREE SECTIONS

* NOMINAL. ACTUAL DIMENSIONS ARE AS REQUIRED TO PROVIDE SYMBOLS IN ACCORDANCE WITH ITE STANDARD FOR "LANE-USE TRAFFIC CONTROL SIGNAL HEADS" AND CURRENT ADDITION OF MUTCD.

LANE-USE TRAFFIC CONTROL SIGNAL HEAD

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF OPERATIONS

STANDARD

SIGNAL HEADS

RECOMMENDED JAN 27, 2025


CHIEF, TSMO ARTERIALS AND PLANNING SECTION

RECOMMENDED JAN 27, 2025


CHIEF, HIGHWAY SAFETY AND TRAFFIC OPERATIONS DIVISION

SHT. 1 OF 1

TC-8805

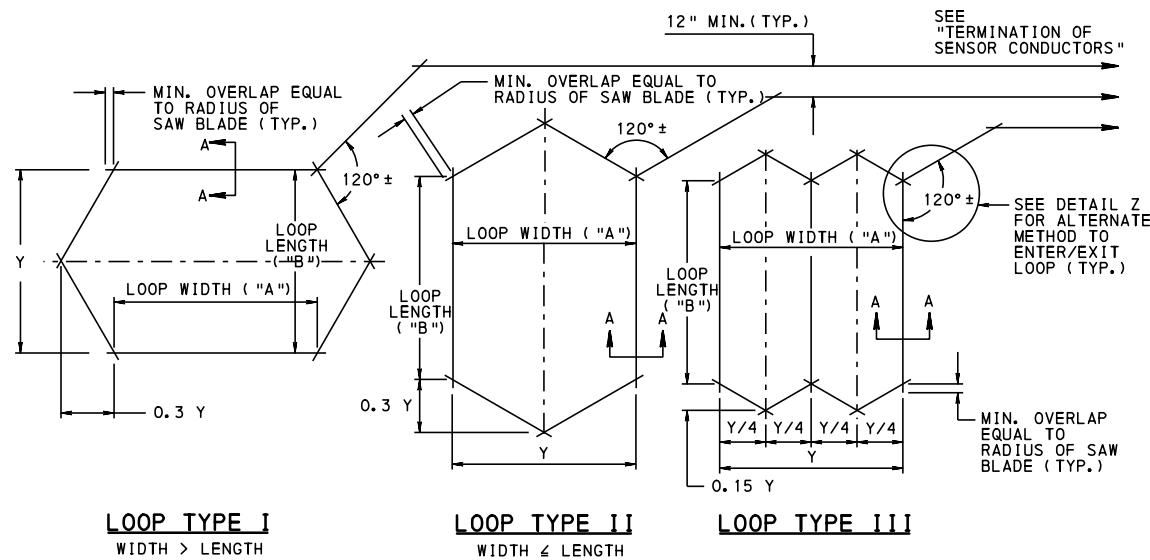

TYPICAL SENSOR INSTALLATION - LOOP DETECTOR

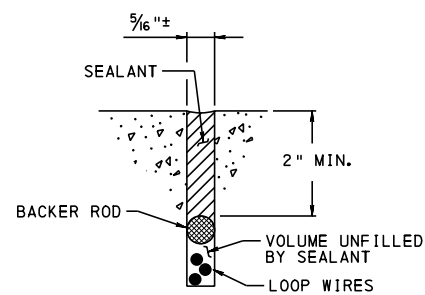


NOTE:
THREE CONDUCTORS SHOWN FOR ILLUSTRATION PURPOSES ONLY.

SECTION A-A

THIS TABLE (FOR INFORMATION ONLY) APPROXIMATES THE RESULTANT INDUCTANCE OF A LOOP BASED ON SIZE OF THE LOOP AND NUMBER OF SENSOR TURNS.

LOOP SIZE (FT)	LOOP INDUCTANCE (MICROHENRIES)		
	NUMBER OF TURNS		
5' x 5'	2	3	4
6' x 6'	---	62	104
6' x 10'	---	76	129
6' x 15'	51	107	181
6' x 20'	69	147	249
6' x 22'	88	187	320
6' x 25'	96	204	349
6' x 30'	107	229	392
6' x 35'	126	272	461
6' x 40'	146	315	542
6' x 45'	165	359	618
6' x 50'	185	402	695
6' x 50'	205	447	773


USE TWO TURNS AS A MINIMUM

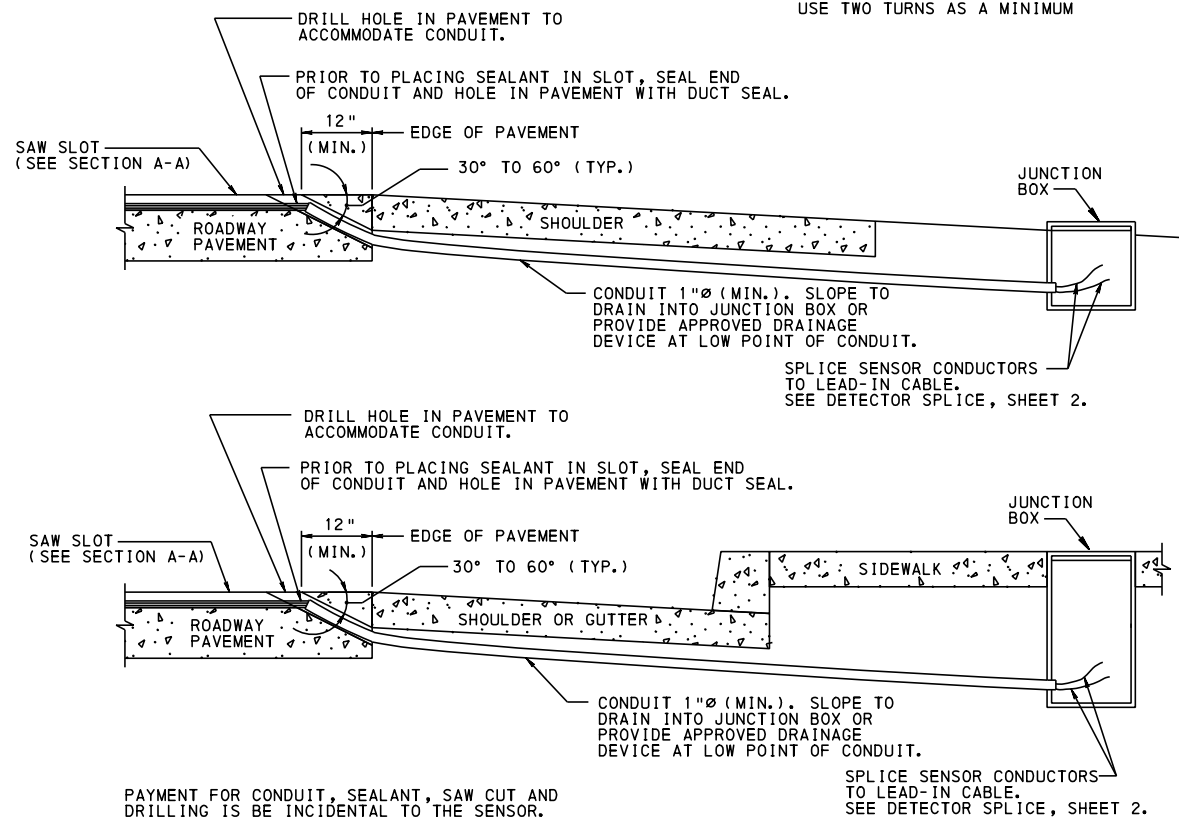


PAYMENT FOR CONDUIT, SEALANT, SAW CUT AND DRILLING IS BE INCIDENTAL TO THE SENSOR.

SPLICE SENSOR CONDUCTORS TO LEAD-IN CABLE. SEE DETECTOR SPLICE, SHEET 2.


TERMINATION OF SENSOR CONDUCTORS

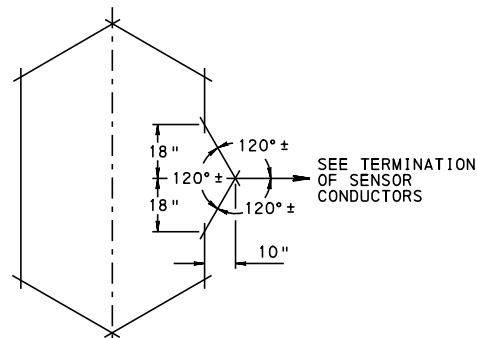


DETAIL Z

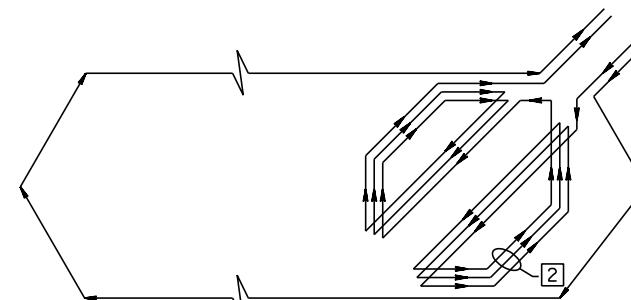

DETECTOR WIRING DETAIL

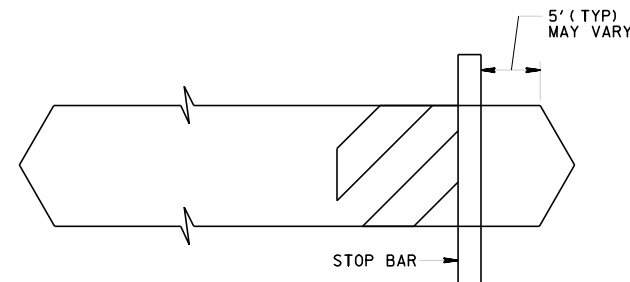


ALTERNATE TYPE A DETECTOR LAYOUT



DETECTOR SAWCUT DETAIL

ALTERNATE DETECTOR NOTES:


- 1 ROUND CORNERS OF ACUTE SAWCUTS TO PREVENT DAMAGE TO CONDUCTORS.
- 2 INSTALL 3 TURNS WHEN ONLY ONE LOOP IS ON A SENSOR UNIT CHANNEL. INSTALL 5 TURNS WHEN ONE LOOP IS CONNECTED IN SERIES WITH 3 ADDITIONAL 6'x6' LOOPS ON A SENSOR UNIT CHANNEL.

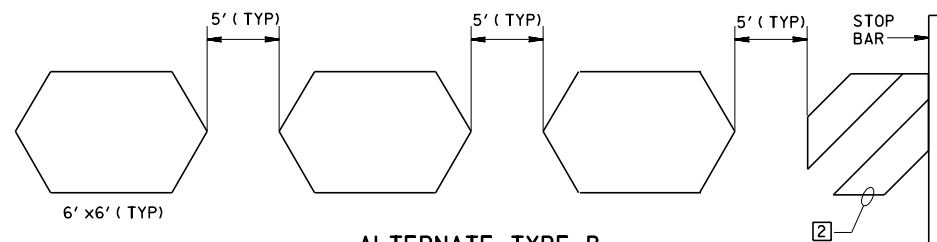

ALTERNATE TYPE B SERIES LAYOUT

ALTERNATE SENSOR INSTALLATION - LOOP DETECTOR

FOR ENHANCED BICYCLE AND MOTORCYCLE DETECTION

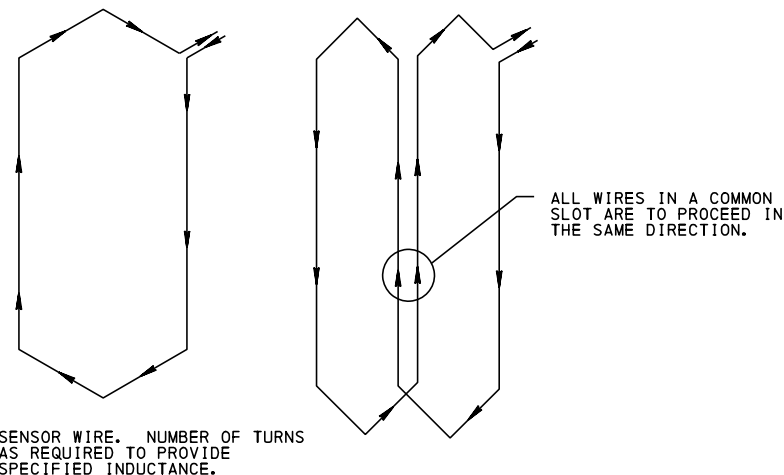

TYPES I & II

TYPE III

TYPICAL LAYOUT OF LOOP SENSOR

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF OPERATIONS


STANDARD

DETECTORS


RECOMMENDED JAN 27, 2025
CHIEF, TSMO ARTERIALS AND PLANNING SECTION

RECOMMENDED JAN 27, 2025
CHIEF, HIGHWAY SAFETY AND TRAFFIC OPERATIONS DIVISION

SHT. 1 OF 4
TC-8806

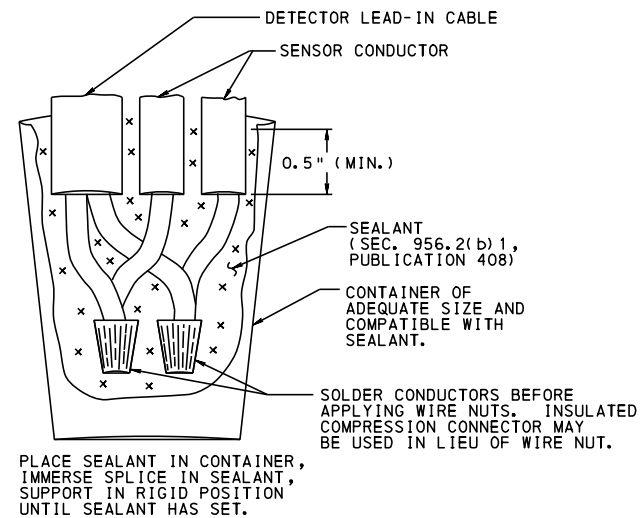

ALTERNATE A

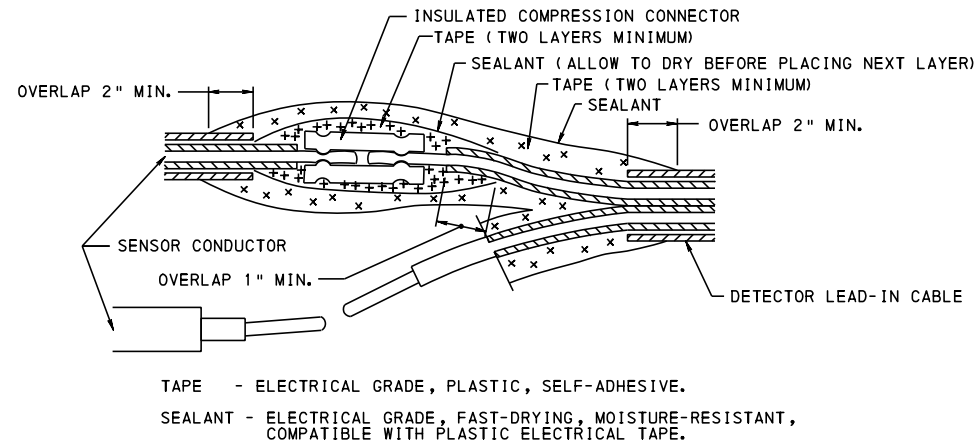


ALTERNATE B

ALTERNATE C SPLICE WILL BE MADE ELECTRICALLY SECURE WITH INSULATED COMPRESSION CONNECTORS THEN COVERED WITH A SPLICING KIT THAT IS MOISTURE-PROOF, SPLICE ENCAPSULATING (INCLUDING CABLE JACKET), AND DESIGNED FOR INSULATING AND SPLICING ELECTRIC CABLE; OR A RE-ENTERABLE SPLICE KIT AS SPECIFIED IN SEC. 956.2(b)4, PUBLICATION 408.


ALTERNATE C

DETECTOR SPLICE

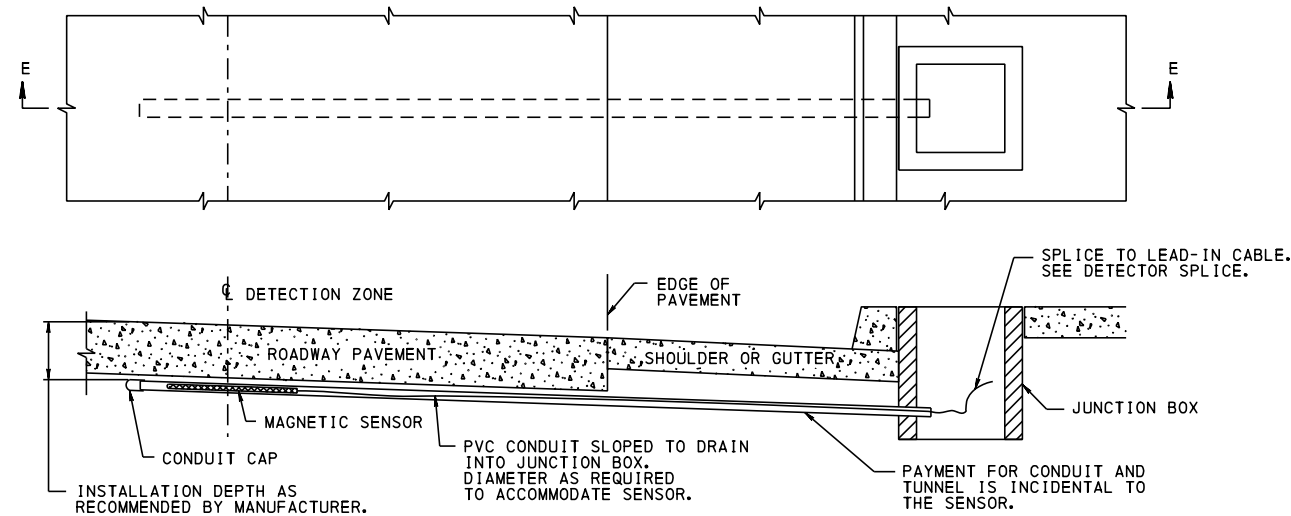

SECTION E-E

TYPICAL SENSOR INSTALLATION - MAGNETIC DETECTOR

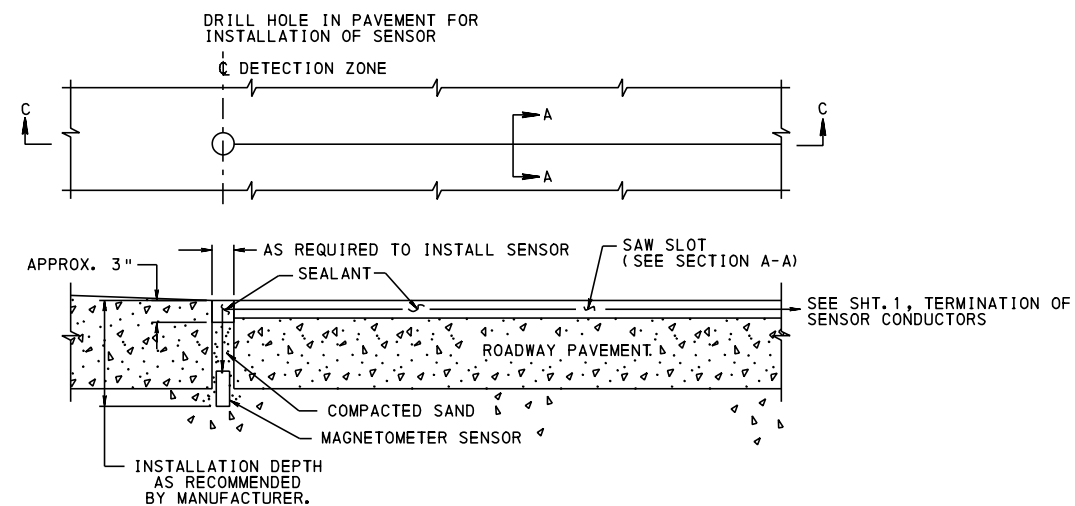

SECTION C-C

TYPICAL SENSOR INSTALLATION - MAGNETOMETER DETECTOR

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF OPERATIONS

STANDARD


DETECTORS

RECOMMENDED JAN 27, 2025
CHIEF, T&MO ARTERIALS AND PLANNING SECTION


RECOMMENDED JAN 27, 2025
CHIEF, HIGHWAY SAFETY AND TRAFFIC OPERATIONS DIVISION

SHT. 2 OF 4


TC-8806

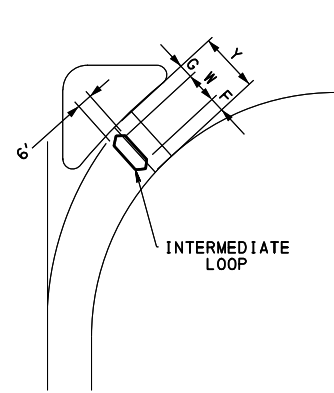

RIGHT TURN LANE / NO PARKING

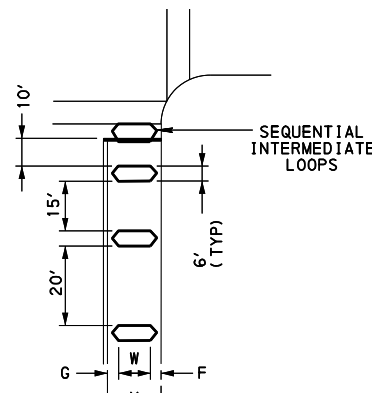

WIDE LANE

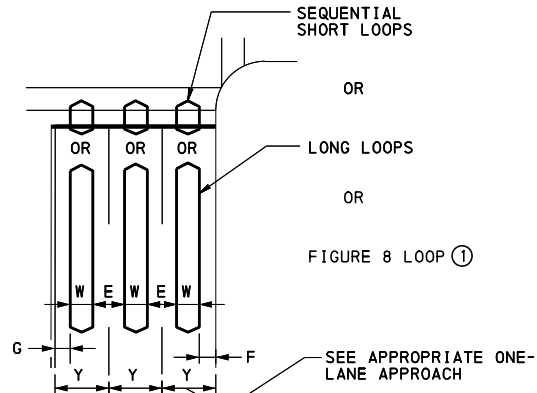


MULTILANE APPROACH / WITH INDIVIDUAL LANE DETECTION

RIGHT TURN LANE / NO PARKING
WIDE LANE


Y	G	W	F
LANE WIDTH	DISTANCE FROM LANE LINE OR ISLAND CURB TO LOOP	WIDTH OF LOOP	DIST. FROM CURB OR EDGE OF PAVEMENT TO LOOP
14'	4'	6'	4'
15'	4'	7'	4'
16'	4'	8'	4'
17'	4'	9'	4'
18'	4'	10'	4'
19'	4'	11'	4'
20'	4'	12'	4'
21'	4'	13'	4'
22'	4'	14'	4'
23'	4'	15'	4'
24'	4'	16'	4'
25'	4'	17'	4'
26'	4'	18'	4'

MULTILANE APPROACH / WITH INDIVIDUAL LANE DETECTION


Y	G	E	W	F
APPROACH WIDTH	DIST. FROM CENTERLINE TO LOOP	DIST. BETWEEN LOOPS	WIDTH OF LOOP	DIST. FROM LOOP TO CURB OR EDGE OF ROAD
10+10+10 = 30'	3'	5'	5'	2'
11+11+11 = 33'	3'	5'	6'	2'
12+12+12 = 36'	3'	6'	6'	3'




① FIGURE 8 LOOP

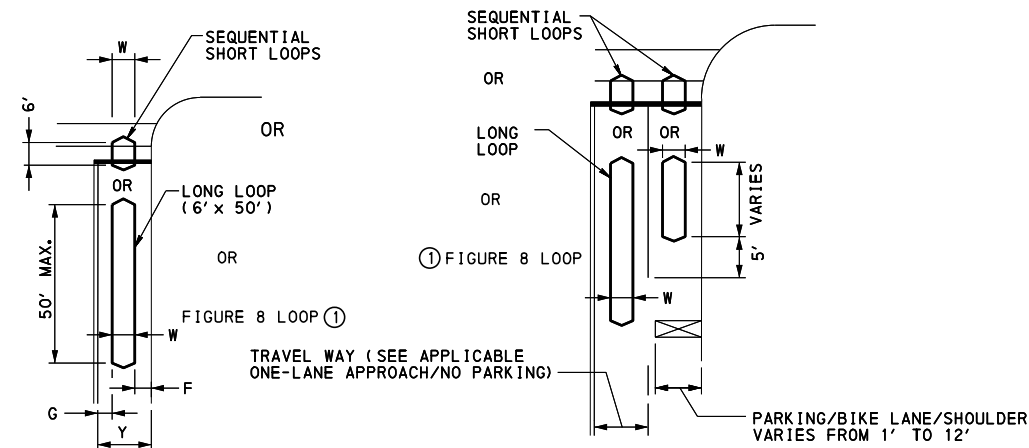

ONE-LANE APPROACH / NO PARKING

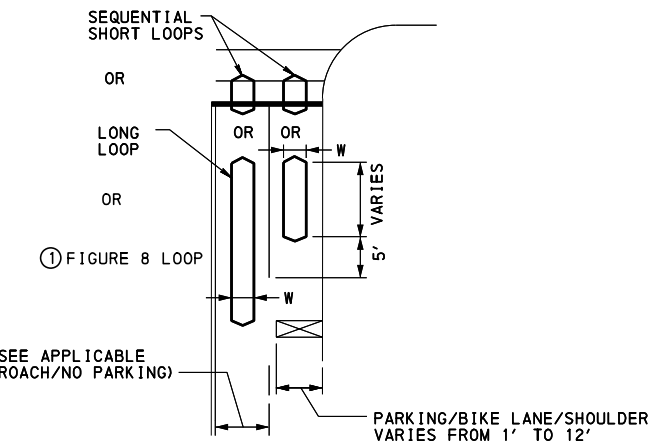

ONE-LANE APPROACH WITH PARKING, BIKE LANE OR SHOULDER
(SEE APPLICABLE ONE-LANE APPROACH/NO PARKING)

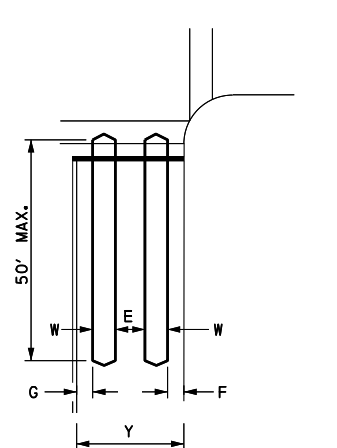

ONE / TWO-LANE APPROACH / NO PARKING

ONE-LANE APPROACH / NO PARKING

Y	G	W	F
APPROACH WIDTH	DISTANCE FROM CENTERLINE TO LOOP	WIDTH OF LOOP	DIST. FROM CURB OR EDGE OF PAVEMENT TO LOOP
9'	3'	4'	2'
10'	3'	5'	2'
11'	3'	6'	2'
12'	3'	6'	3'
13'	3'	7'	3'

ONE / TWO-LANE APPROACH / NO PARKING

Y	G	E	W	F
18'	2'	2'	6'	2'
19'	3'	2'	6'	2'
20'	3'	2'	6'	3'
21'	3'	3'	6'	3'
22'	3'	4'	6'	3'
23'	3'	5'	6'	3'
24'	3'	6'	6'	3'
25'	3'	6'	6'	4'

FOR 26' LANES, THREE 6' LOOPS SHOULD BE USED WITH 2' SPACING BETWEEN THEM AND KEEPING 2' BETWEEN THE LOOP AND CURB OR EDGE OF PAVEMENT AND 2' BETWEEN THE LOOP AND LANE LINE OR ISLAND CURB.

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF OPERATIONS

STANDARD


DETECTORS
LOOP DETECTOR LAYOUTS

RECOMMENDED JAN 27, 2025
CHIEF, T&MO ARTERIALS AND PLANNING SECTION

RECOMMENDED JAN 27, 2025
CHIEF, HIGHWAY SAFETY AND TRAFFIC OPERATIONS DIVISION

SHT. 3 OF 4

TC-8806

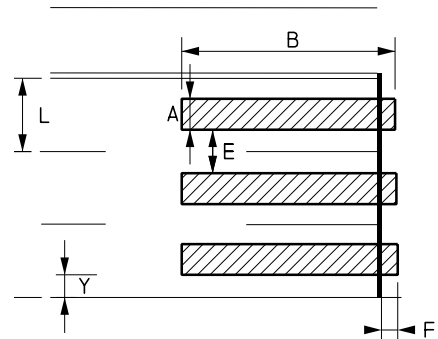

DIMENSION	STOP BAR PRESENCE ZONE
A	① ②
B	40' MIN.
E	2' MIN.
F	3'
Y	1' MIN.

USE SEPARATE DETECTION INPUT (CHANNEL) FOR EACH ZONE (DESIRABLE), BUT MAY COMBINE ZONES IN LANES WHICH ACTUATE THE SAME PHASE WHEN THE NUMBER OF DETECTOR INPUTS TO THE CONTROLLER IS LIMITED.

- ① FOR LOOPS, 5 TO 6' TYPICAL, BUT PROVIDE 1' MIN. BUFFER TO EDGE OF LANE.
② FOR NON-INTRUSIVE DETECTION, WIDTH VARIES BASED ON MANUFACTURER RECOMMENDATIONS.

STOP BAR PRESENCE ZONE

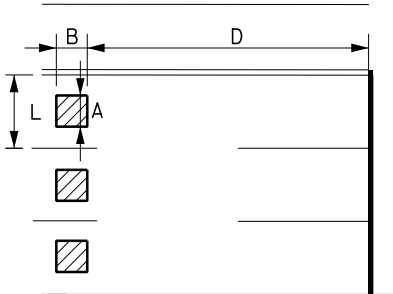


TABLE OF ADVANCE DISTANCES BASED ON APPROACH SPEED	
APPROACH SPEED	DISTANCE "D"
25 MPH	165'
30 MPH	200'
35 MPH	230'
40 MPH	275'
45 MPH	330'
50 MPH	365'
55 MPH	400'

DIMENSION	ADVANCE ZONE
A	L - 2'
B	6'

DISTANCE "D" MAY BE ADJUSTED AS FOLLOWS WHEN THE ADVANCE ZONE IS ONLY USED FOR AUTOMATED TRAFFIC SIGNAL PERFORMANCE MEASURES (WITH APPROVED JUSTIFICATION):
1. IF THE INTERSECTION APPROACH GEOMETRY PRECLUDES THE ABILITY TO COLLECT DATA AT THE DISTANCE INDICATED IN THE TABLE, DIMENSION "D" MAY BE REDUCED IF THE QUEUE DOES NOT REGULARLY EXTEND PAST THE PROPOSED SETBACK DISTANCE.


2. IF A CLOSER LOCATION IS NOT FEASIBLE, EXIT DETECTION FROM AN UPSTREAM INTERSECTION MAY BE USED WITH PEER-TO-PEER COMMUNICATION TO PASS THE DETECTOR CALL TO THE SUBJECT INTERSECTION. EXIT DETECTION SHOULD NOT BE USED WHERE SIGNIFICANT MID-BLOCK TRAFFIC GENERATORS EXIST OR THE DISTANCE TO THE UPSTREAM DETECTOR WOULD EXCEED 1,000 FEET.

DISTANCE "D" SHOULD NOT BE REDUCED WHEN THE ADVANCE ZONE IS USED FOR VOLUME-DENSITY OPERATION.

EXIT DETECTION SHOULD NOT BE USED WHEN THE ADVANCE ZONE IS USED FOR VOLUME-DENSITY OPERATION.

USE SEPARATE DETECTION INPUT (CHANNEL) FOR EACH ZONE (DESIRABLE).
A SINGLE ZONE MAY BE USED WHERE EQUIPMENT CANNOT DIFFERENTIATE LANES OR DETECTOR INPUTS TO THE CONTROLLER ARE LIMITED.

ADVANCE ZONE

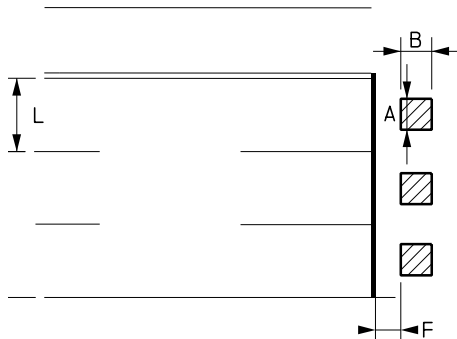


DIMENSION	STOP BAR LANE-BY-LANE COUNT ZONE
A	L - 2'
B	6'
F	6' ①

USE SEPARATE DETECTION INPUT (CHANNEL) FOR EACH ZONE.

- ① DIMENSION "F" MAY BE ADJUSTED TO AVOID OVERLAP WITH OTHER ZONES WHEN THE DETECTION TECHNOLOGY DOES NOT SUPPORT OVERLAP.

STOP BAR LANE-BY-LANE COUNT ZONE

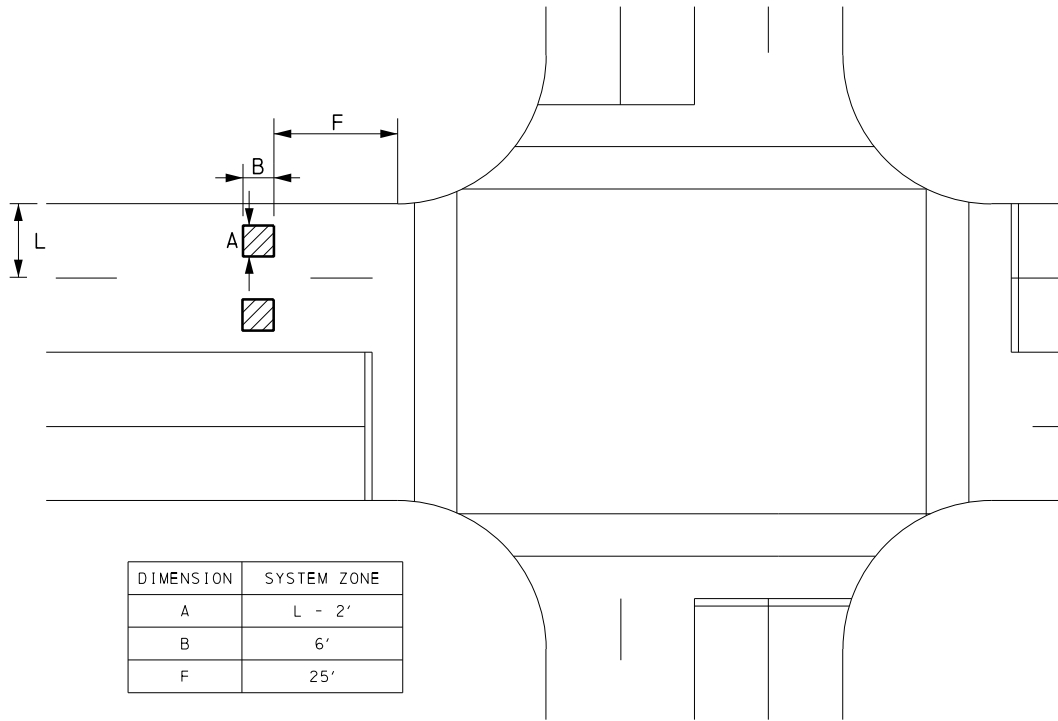

DIMENSION	SYSTEM ZONE
A	L - 2'
B	6'
F	25'

USE SEPARATE DETECTION INPUT (CHANNEL) FOR EACH ZONE.

SYSTEM ZONE

DETECTION ZONE GENERAL NOTES

- DIMENSIONS FOR RECTANGULAR DETECTION ZONES ARE SHOWN. LOOP WIDTH OR LENGTH FOR HEXAGONAL ZONES AS SHOWN ON TC-8806 SHEET 1 OF 4.
- DIMENSIONS AND SHAPE TO BE AS SHOWN UNLESS OTHERWISE INDICATED ON THE APPROVED TRAFFIC SIGNAL PLAN.
- DILEMMA ZONE DETECTION SHALL BE PROVIDED USING ONE OF THE FOLLOWING TWO METHODS: 1) CONTINUOUS ESTIMATED TIME OF ARRIVAL (ETA), OR 2) TRIP LINE.



 AREA OF DETECTION

TRIP LINE	TRIP LINE METHOD ①		TRIP LINE METHOD FOR HIGH SPEED LOCATIONS		
	LOCATION	SPEED RANGE (MPH)	LOCATION	SPEED RANGE (MPH)	EXTENSION (SEC)
1	380'	45 TO 60	470'	55 TO 65	1.5
2	310'	45 TO 60	390'	50 TO 65	2.0
3	255'	40 TO 60	340'	42 TO 55	2.0
4	205'	35 TO 50	270'	37 TO 50	1.5
5	135'	30 TO 45	220'	35 TO 45	2.0


- ① UTILIZE 0.5 SEC. EXTENSION.

SET CONTROLLER PASSAGE TO 0.2 SEC.

DILEMMA ZONE - TRIP LINE

COMMONWEALTH OF PENNSYLVANIA DEPARTMENT OF TRANSPORTATION BUREAU OF OPERATIONS		
STANDARD		
DETECTORS DETECTION ZONE PLACEMENT		
RECOMMENDED JAN 27, 2025  CHIEF, TRMO ARTERIALS AND PLANNING SECTION	RECOMMENDED JAN 27, 2025  CHIEF, HIGHWAY SAFETY AND TRAFFIC OPERATIONS DIVISION	SHT. 4 OF 4 TC-8806

PREEMPTION STATES

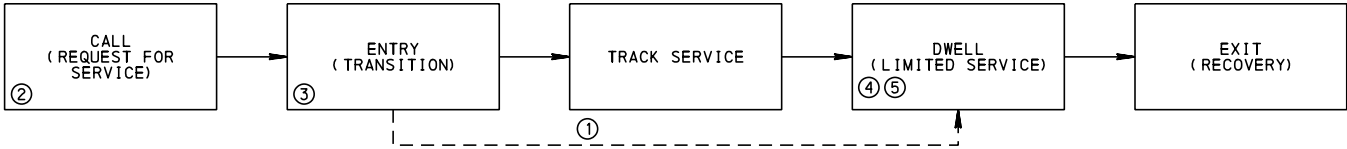

- ① TRACK SERVICE STATE IS ONLY USED FOR RAILROAD PREEMPTION. OTHERWISE, SEQUENCE PROCEEDS DIRECTLY FROM ENTRY TO DWELL.
- ② DELAY DURATION (TIME FROM CALL RECEIVED UNTIL GOING TO ENTRY STATE) IS TO BE ZERO UNLESS OTHERWISE INDICATED ON THE TRAFFIC SIGNAL PLAN.
- ③ THE RIGHT-OF-WAY TRANSFER IS EXECUTED DURING THE ENTRY STATE AS FOLLOWS:
- A) THE CONTROLLER SHALL STAY IN A NORMAL SEQUENCE PHASE IF THAT PHASE IS ALSO DEFINED AS A PREEMPTION PHASE.
 - B) PHASES OTHER THAN THE PREEMPTION PHASE SHALL BE TERMINATED TO PROVIDE SERVICE ONLY TO THE PREEMPTION PHASE(S). NORMAL CHANGE AND CLEARANCE TIMES FOR THE PHASE BEING TERMINATED SHOULD BE USED, INCLUDING PEDESTRIAN CLEARANCE INTERVAL, YELLOW CHANGE INTERVAL, AND RED CLEARANCE INTERVAL.
 - C) AVOID YELLOW TRAPS, IF PRACTICAL.
- ④ FOR RAILROAD PREEMPTION WHEN PREEMPTION IS EXPECTED TO RUN FOR A LONG DURATION, THE SIGNAL MAY BE OPERATED WITH LIMITED SERVICE FOR NON-CONFLICTING MOVEMENTS DURING THE DWELL STATE (CYCLING PHASES).
- ⑤ DURING THE DWELL STATE, CONTROLLER SHALL REMAIN IN GREEN INTERVAL FOR THE DWELL PHASE(S) INDICATED ON THE TRAFFIC SIGNAL PLAN.

PREEMPTION CONTROLLER SETTINGS

THE FOLLOWING CONTROLLER SETTINGS SHALL BE USED FOR PREEMPTION UNLESS OTHERWISE INDICATED ON THE TRAFFIC SIGNAL PLAN:

PARAMETER	NTCIP 1202 OBJECT	PENNSYLVANIA DEFAULT VALUE
MIN DURATION	preemptMinimumDuration	10
DELAY	preemptDelay	0
MIN GREEN	preemptMinimumGreen	255 ①
ENTER YELLOW	preemptEnterYellowChange	25.5 ①
ENTER RED	preemptEnterRedClear	25.5 ①
MIN DWELL	preemptDwellGreen	5
MAX PRESENCE	preemptMaximumPresence	60
EXIT TYPE	preemptExitType	Coord
EXIT PHASES	preemptExitPhase	2+6 ②

- ① NTCIP 1202 SPECIFIES THE CONTROLLER WILL USE THE SMALLER OF THE VALUE SET FOR THE NORMAL PHASE TIMING OR THE VALUE IN PREEMPTION SETTINGS. BY SETTING THE PREEMPTION SETTINGS TO THE MAXIMUM POSSIBLE VALUES, THE CONTROLLER WILL ALWAYS USE THE NORMAL TIMINGS FOR THE PHASE.
- ② SINCE EXIT TO COORD IS THE DEFAULT, EXIT PHASES ARE NOT TYPICALLY USED. USE SPECIFIED EXIT PHASES IF CONTROLLER WILL FALL BACK TO THOSE PHASES. IF EXIT PHASES OVERRIDE THE EXIT TO COORD SETTING, LEAVE BLANK.

EMERGENCY VEHICLE PREEMPTION GENERAL NOTES

- NORMAL TRAFFIC SIGNAL OPERATION SHALL ONLY BE PREEMPTED BY EMERGENCY VEHICLES RESPONDING TO EMERGENCY CALLS.
- IF A SIGNAL FACE IS DISPLAYING A FLASHING YELLOW ARROW INDICATION WHEN THE CALL FOR PREEMPTION IS RECEIVED AND THE OPPOSING MOVEMENT IS A PREEMPTION PHASE, THE FLASHING YELLOW ARROW INDICATION MAY CONTINUE TO BE DISPLAYED DURING THE ENTRY AND DWELL STATES.
- IF A SIGNAL FACE IS DISPLAYING A FLASHING YELLOW ARROW INDICATION WHEN THE PREEMPTION CALL IS RECEIVED AND THE PROTECTED PHASE ASSOCIATED WITH THE SIGNAL FACE IS A PREEMPTION PHASE, THE FLASHING YELLOW ARROW INDICATION SHALL CONTINUE TO BE DISPLAYED DURING THE ENTRY STATE AND THEN FOLLOWED DIRECTLY BY THE GREEN ARROW INDICATION DURING THE DWELL STATE.
- IF THE SIGNALS ARE IN FLASHING MODE WHEN A PREEMPTION CALL IS RECEIVED, THE SIGNALS SHALL REMAIN IN FLASHING MODE.
- IN EMERGENCY PREEMPTION, NO PRIORITY SHOULD BE ESTABLISHED. PREEMPTION SHALL BE ON A "FIRST COME, FIRST SERVED" OPERATION. ONCE THE FIRST PRIORITY VEHICLE CALLS THE SYSTEM, IT SHALL PREVENT OTHER PREEMPTIVE VEHICLES FROM ENTERING CALLS UNTIL THE FIRST EMERGENCY VEHICLE RELEASES CONTROL AND CLEARS THE INTERSECTION.
- IF THE PREEMPTION EQUIPMENT HAS ENCODING CAPABILITIES FOR VEHICLE IDENTIFICATION, IT IS RECOMMENDED TO HAVE THE ZERO "00" POSITION ON TO GIVE UNENCODED EMITTERS THE ABILITY TO ACTIVATE THE EMERGENCY PREEMPTION.
- LOCATION OF EMERGENCY VEHICLE DETECTORS ARE TO BE FIELD ADJUSTED TO ACHIEVE MAXIMUM OPERATION.
- A WHITE CONFIRMATION LIGHT SHALL BE PROVIDED FACING EACH APPROACH EQUIPPED FOR EMERGENCY VEHICLE PREEMPTION. THE CONFIRMATION LIGHT FOR THE APPROACH WHICH HAS ACTIVE PREEMPTION SHALL FLASH AT A RATE OF NO LESS THAN 50 NOR MORE THAN 60 TIMES PER MINUTE DURING THE ENTIRE DURATION OF THE DWELL STATE. THE CONFIRMATION LIGHTS FOR NON-PREEMPTED PHASES SHALL BE OFF.

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF OPERATIONS

STANDARD

PREEMPTION

RECOMMENDED JAN 27, 2025


CHIEF, TSMO ARTERIALS AND
PLANNING SECTION

RECOMMENDED JAN 27, 2025

CHIEF, HIGHWAY SAFETY AND
TRAFFIC OPERATIONS DIVISION


SHT. 1 OF 1

TC-8807

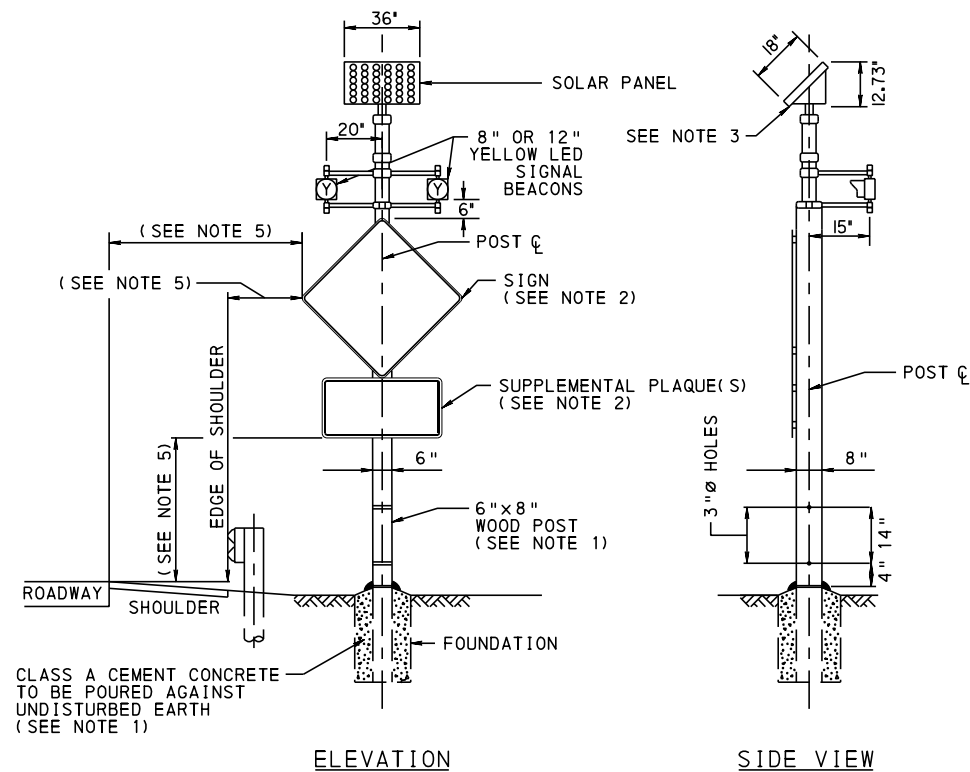

FLASHING WARNING DEVICE SIGN ASSEMBLY

(SEE NOTE 4)

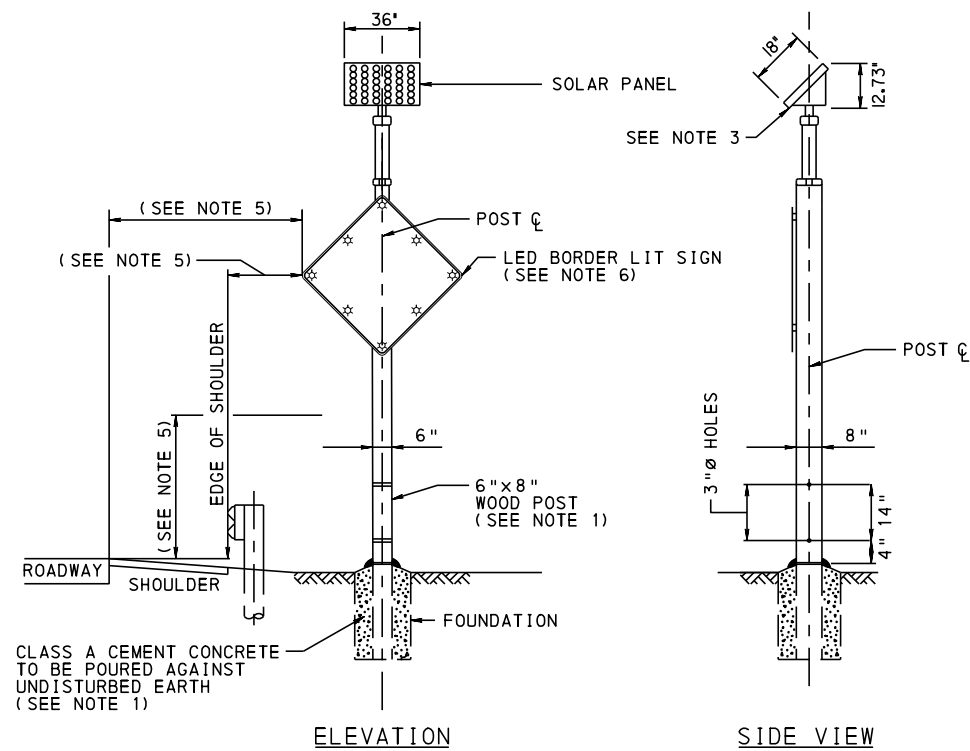

LED BORDER LIT SIGN ASSEMBLY

(SEE NOTE 4)

GENERAL NOTES:

- 6" x 8" TYPE E SIGN POST, FOUNDATION, SUPPORT, AND MISCELLANEOUS MATERIAL AS SHOWN IN PUBLICATION 111, TC-8702E. REFER TO PUBLICATION 408, SECTION 934.2, PUBLICATION 236, AND PUBLICATION 46 EXHIBIT 2-6 (ALL LATEST VERSIONS).
- TOTAL SQUARE FOOTAGE OF SIGN AREA COMBINED BETWEEN PRIMARY SIGN AND ALL SUPPLEMENTAL SIGNS ON ASSEMBLY SHALL BE LESS THAN OR EQUAL TO 20 SQUARE-FEET.
- INSTALL ON ANGLE (45° MAX.) BETWEEN WEST AND SOUTH FACING AVOIDING SHADOWING FROM TREE OVERHANG AND ACCORDING TO MANUFACTURER'S RECOMMENDATIONS. INSTALL SOLAR PANEL IN ACCORDANCE WITH PUBLICATION 408 SECTION 1103.03. SOLAR PANEL IN VERTICAL PLANE (W x V) SHALL NOT EXCEED 4.5 SQUARE FEET.
- REFER TO PUBLICATION 111, TC-8702E, FOR ADDITIONAL INFORMATION AND DETAILS.
- FOR SIGN MOUNTING HEIGHT AND OFFSET INFORMATION, REFER TO TC-8702E, SHEET 1.
- LED BORDER LIT SIGN SIZE AND TYPE VARIES BY APPLICATION AND CONFIGURATION. INCLUDES SIGN ASSEMBLY WITH LED BORDER, CONTROLLER ASSEMBLY, TIME CLOCK, AND MISCELLANEOUS MATERIAL AS SHOWN IN PUBLICATION 408, SECTION 935.4. REFER TO PUBLICATION 408, SECTIONS 935.2 AND 1103.03(K), PUBLICATION 236, AND PUBLICATION 46 EXHIBIT 2-6 (ALL LATEST VERSIONS). TOTAL SQUARE FOOTAGE OF SIGN AREA SHALL BE LESS THAN OR EQUAL TO 20 SQUARE-FEET.

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF OPERATIONS

STANDARD

FLASHING WARNING DEVICE
WOOD POST MOUNTING

RECOMMENDED APR 6, 2026

CHIEF, TSMO ARTERIALS AND
PLANNING SECTION

RECOMMENDED APR 6, 2026

CHIEF, HIGHWAY SAFETY AND
TRAFFIC OPERATIONS DIVISION

SHT. 1 OF 1

TC-8808